
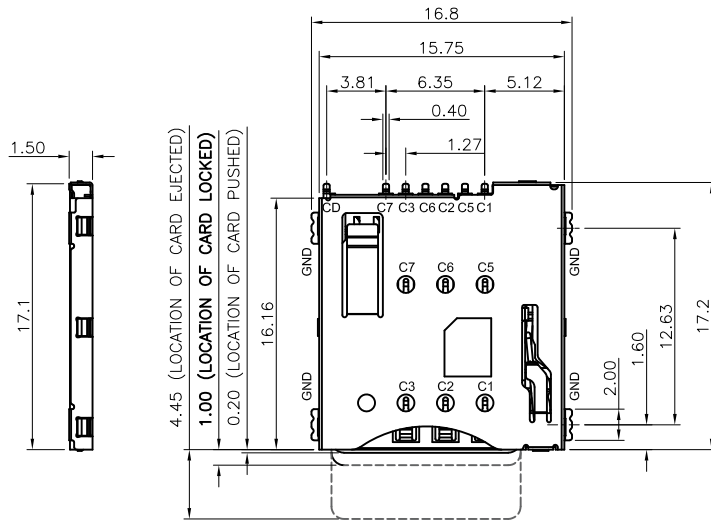


MICRO SIM CARD

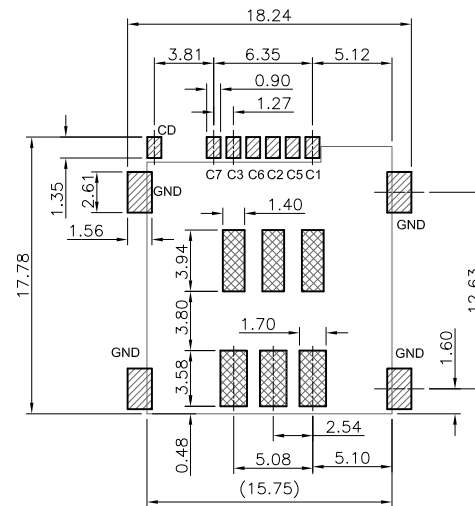


RECOMMENDED P.C.B LAYOUT
ALL TOLERANCE $\pm 0.05\text{mm}$

-  SOLDER AREA
 NONE CIRCUIT DIAGRAM AREA

SPECIFICATION:





1. Current Rating: 0.5A
2. Voltage Rating: 50V DC
3. Contact Resistance: 100m Ω Max.
4. Insulator Resistance: 1000M Ω Min.
5. Withstanding Voltage: 500V AC
6. Durability: 5,000 Cycles
7. Operating Temperature : -40°C ~ +70°C

PIN NO.	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



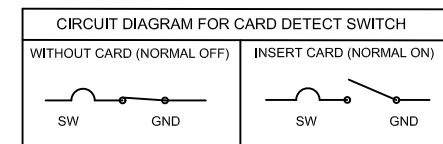


6.	CAM PIN	Stainless Steel
5.	COLL SPRING	SWP.
4.	HEART CAM	Hi-Temp Thermoplastic UL94v-0, Black
3.	SHELL	Stainless Steel , Ni Plated
2.	CONTACT	Copper Alloy , Gold Plating on Contact Area
1.	HOUSING	Hi-Temp Thermoplastic UL94v-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES $\pm 3^\circ$	NAME Chunxin Technology
SCALE 1 : 1	DWN JACK WU	20170918
SHEET 1/2	CHK PETER WANG	20170918
SIZE A4	APVD SIMON LI	20170918
CUSTOMER DRAWING		PRODUCT No. CX1-MSM6201-41
		DRAWING No. CS-MSM004

1	INITIAL RELEASE	JACK WU	2017/09/18
2	NEW FORM	JACK WU	2020/05/03
3			

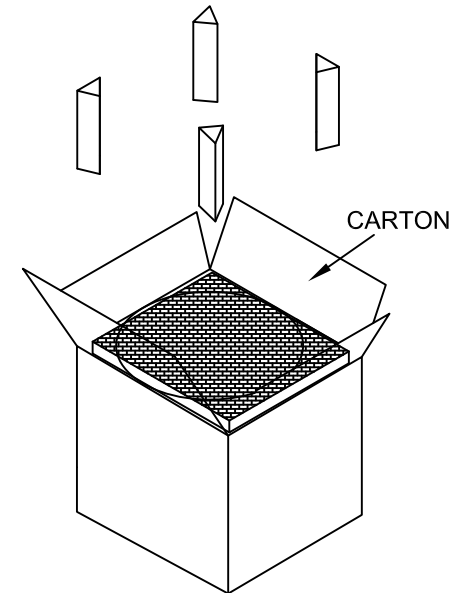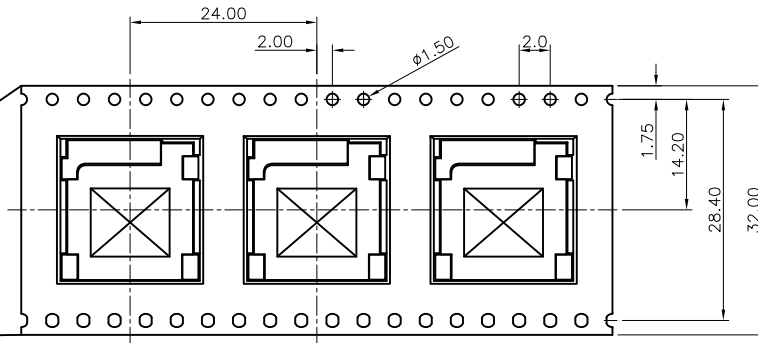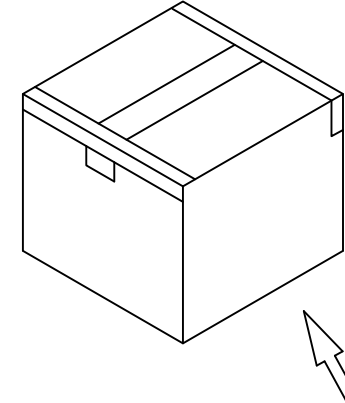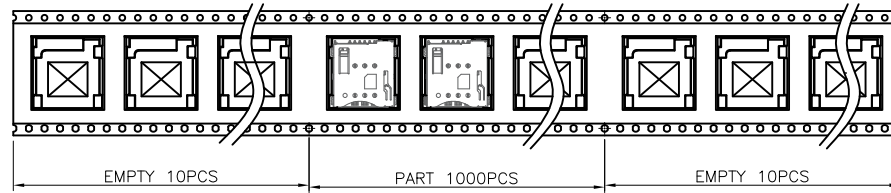

User Direction of Unreeling



PE BAG

NOTES

- NUMBER OF CONNECTORS :
1,000 PCS / REEL ; 10,000 PCS / CARTON 10 REELS
- LEAD TAPE LENGTH

NO.	PART NAME		DESCRIPTION	
DIMESIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :		Chunxin Technology
		X, ± 0.30		
		X.X, ± 0.20		
		X.XX, ± 0.10		
		ANGLES ± 3°		
SCALE	DWN	20170918	NAME Micro SIM Socket Push Push Type 6Pin w/switch, H=1.5mm	
1 : X	JACK WU	20170918		
SHEET	CHK	20170918		
2/2	PETER WANG	20170918		
SIZE	APVD	20170918	PRODUCT No.	CX1-MSM6201-41
A4	SIMON LI		DRAWING No.	CS-MSM004
CUSTOMER DRAWING				