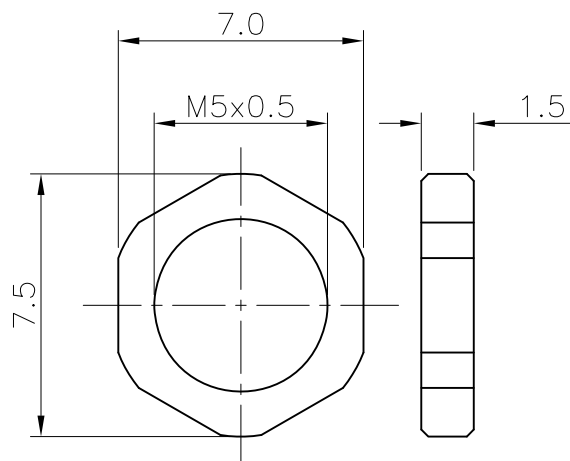
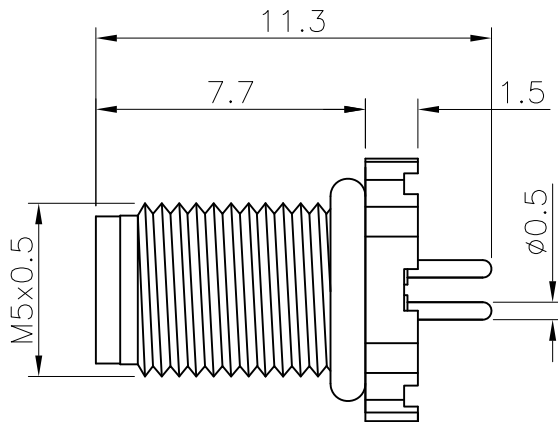
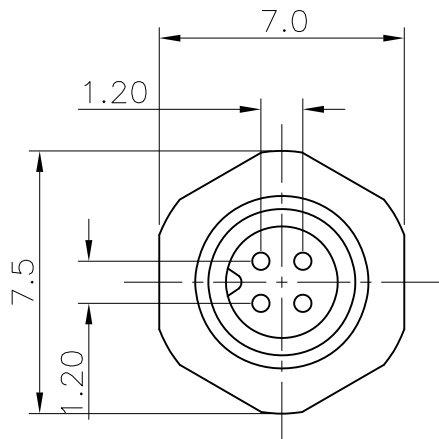


**RECOMMEND
PANEL CUT-OUT**


**RECOMMEND
P.B.C LAYOUT**

NOTE :

CX2-5M042-71	CX2-5M043-71	CX2-5M044-71

SPECIFICATION:

1. Current Rating: 1A
2. Voltage Rating: 60V
3. Water proof: IPX7
4. Operation Temperature: -20°C TO 85°C

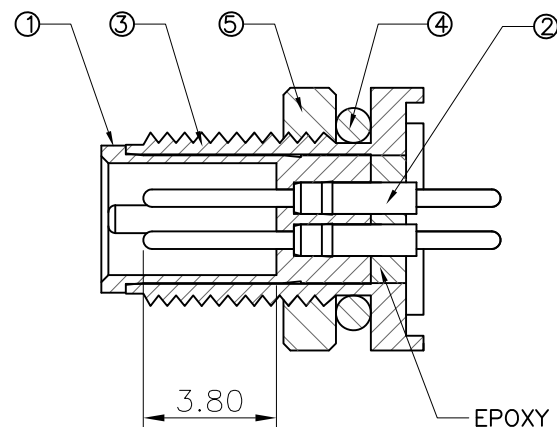

5.	NUT	Brass, Nickel Plated
4.	O-RING	NBR, Black
3.	SHELL	Brass, Nickel Plated
2.	CONTACT	Brass, Gold Plated over Nickel
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
X		± 0.30
X.X		± 0.20
X.XX		± 0.10
ANGLES		± 3°
SCALE 1 : 1		DWN JACK WU 20131023
SHEET 1/1		CHK PETER WANG 20131023
SIZE A4		APVD SIMON LI 20131023
CUSTOMER DRAWING		PRODUCT No. SEE NOTE
		DRAWING No. WP-M5P03

Chunxin Technology

NAME
M5 Panel Type Plug Front Fastened,
Straight DIP Pin