



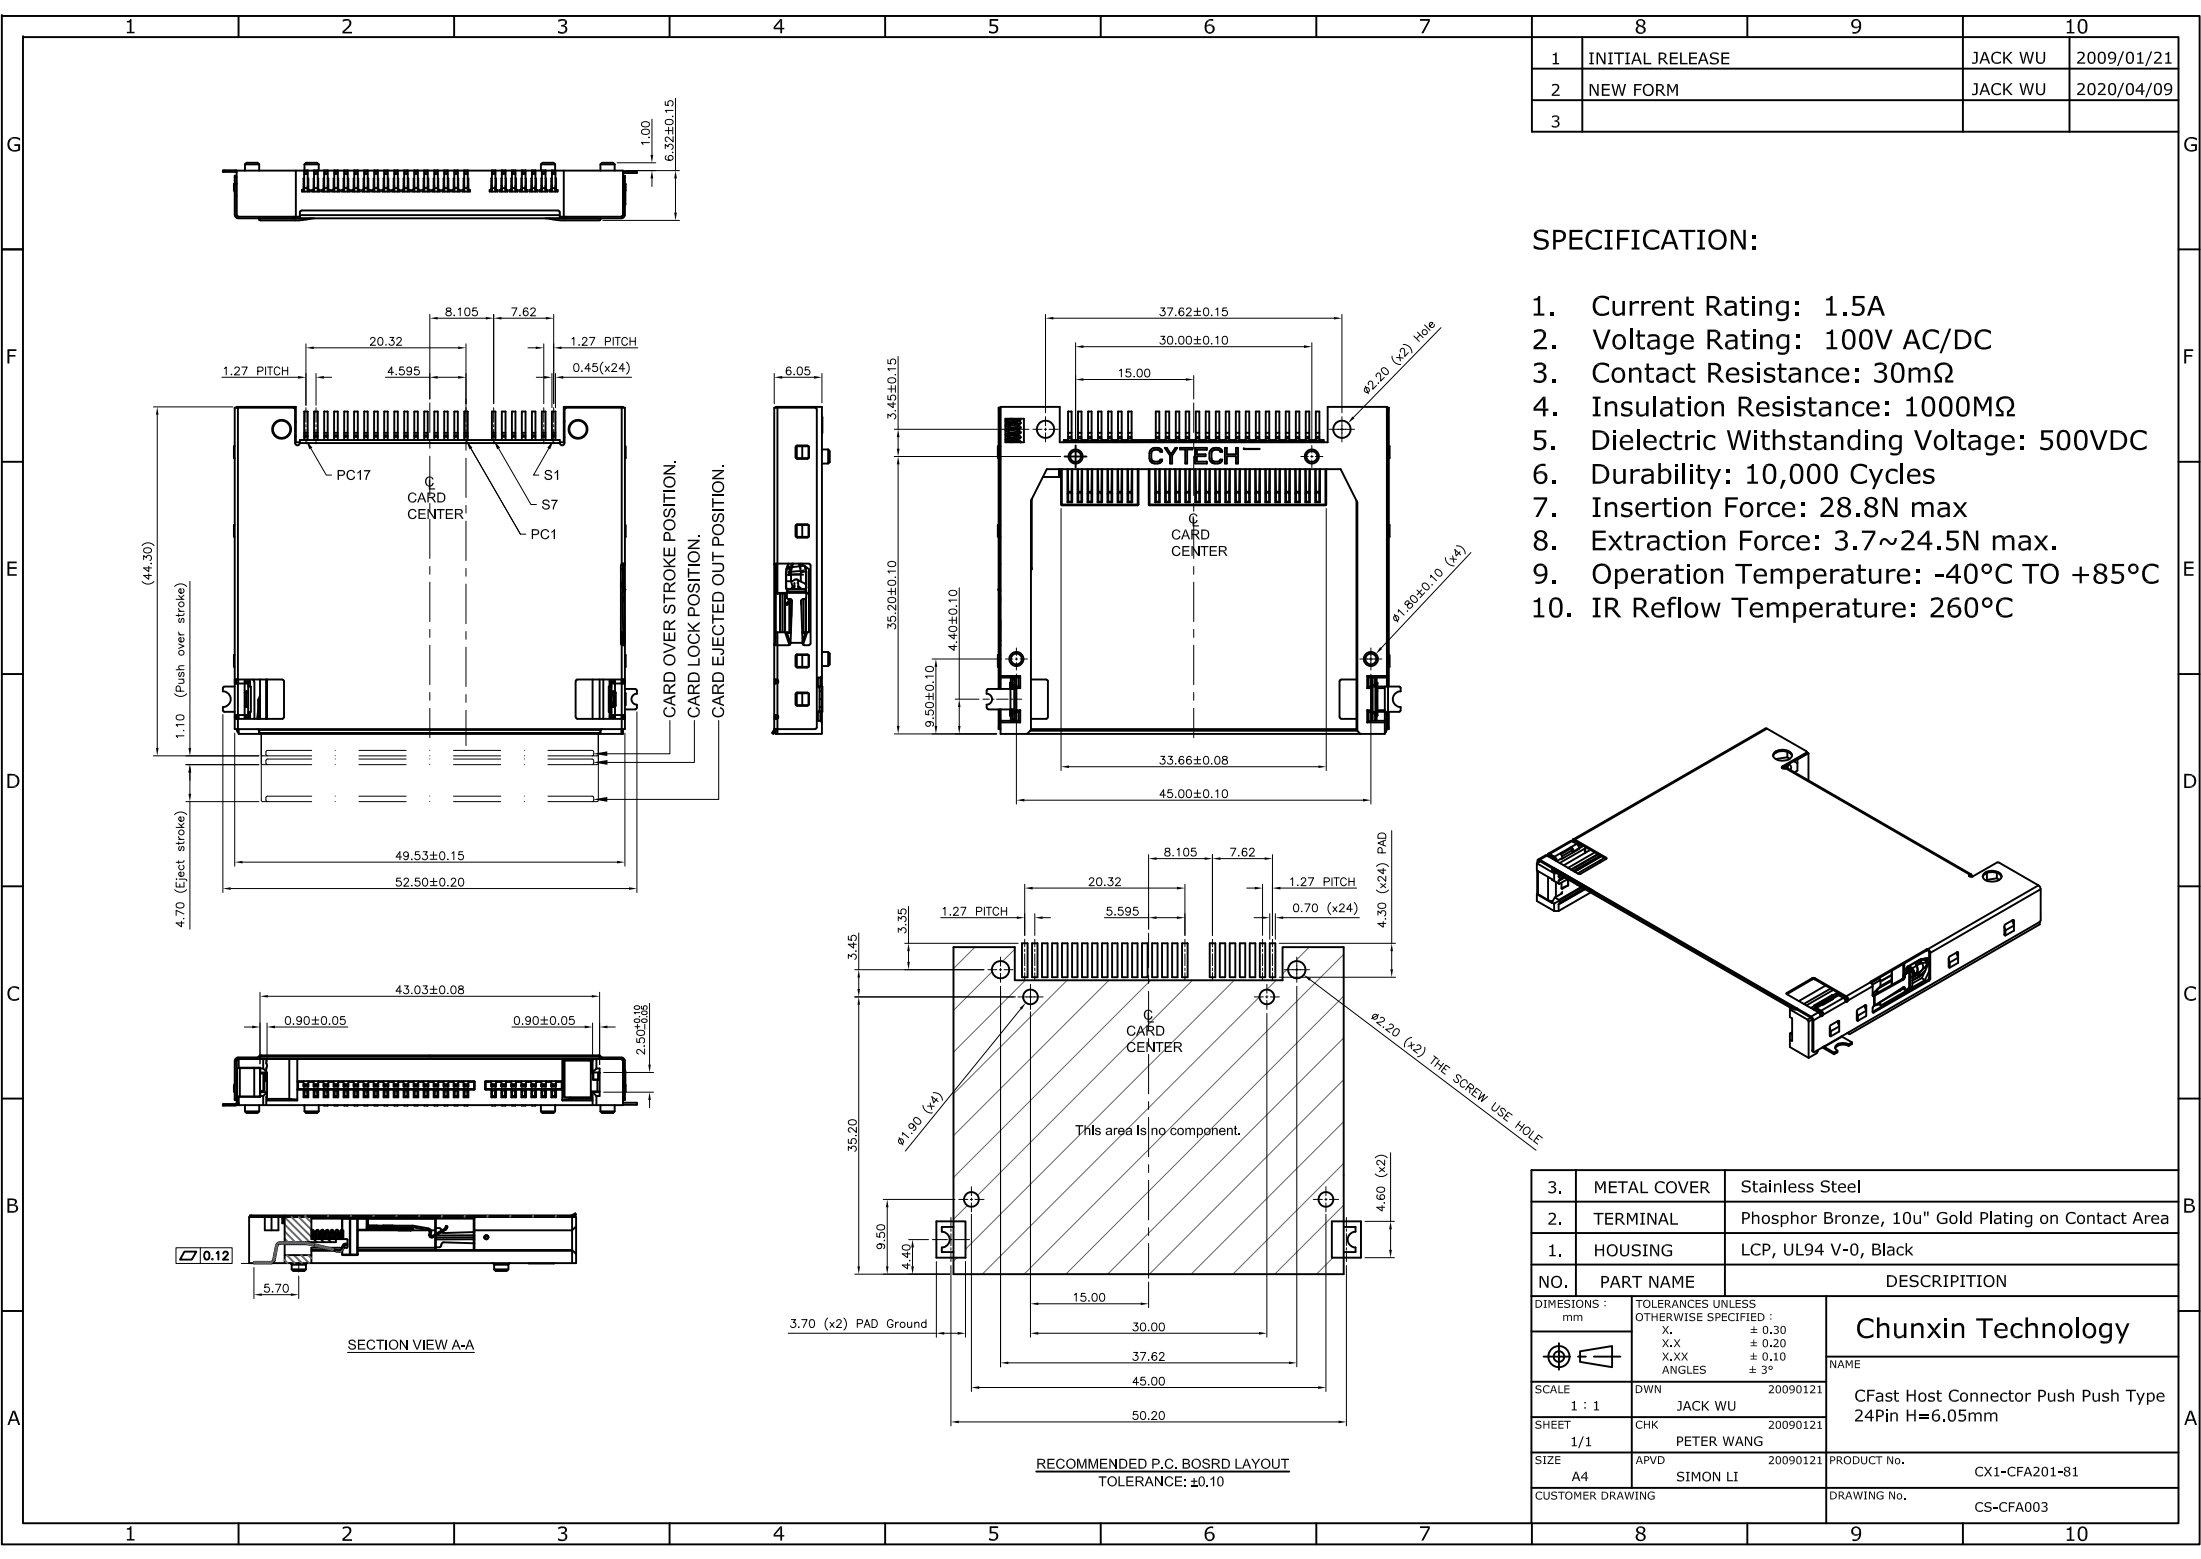

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 100V AC/DC
3. Contact Resistance: 30mΩ
4. Insulation Resistance: 1000MΩ
5. Dielectric Withstanding Voltage: 500VDC
6. Durability: 10,000 Cycles
7. Insertion Force: 28.8N max
8. Extraction Force: 3.7~24.5N max.
9. Operation Temperature: -40°C TO +85°C
10. IR Reflow Temperature: 260°C

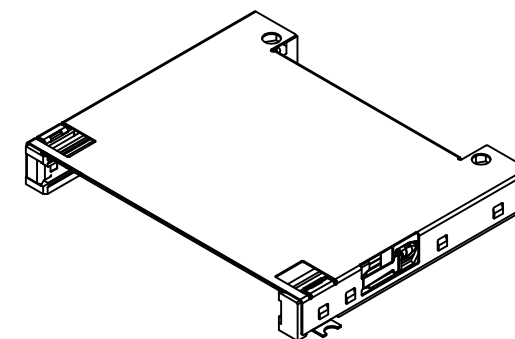

3.	METAL COVER	Stainless Steel
2.	TERMINAL	Phosphor Bronze, 10u" Gold Plating on Contact Area
1.	HOUSING	LCP, UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X. ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE	DWN	20090121
1 : 1	JACK WU	20090121
SHEET	CHK	20090121
1/1	PETER WANG	20090121
SIZE	APVD	20090121
A4	SIMON LI	20090121
CUSTOMER DRAWING		DRAWING No.
		CS-CFA003