
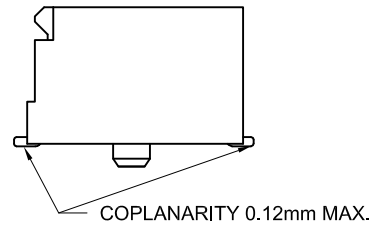
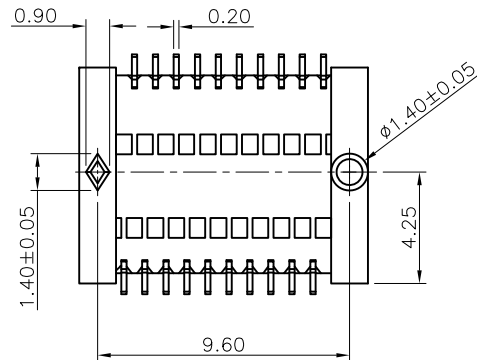
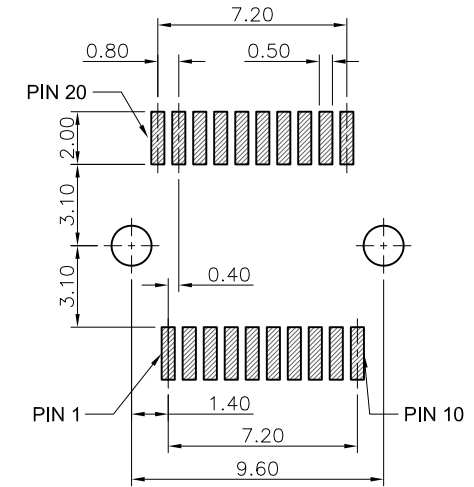
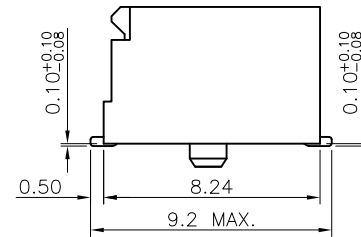
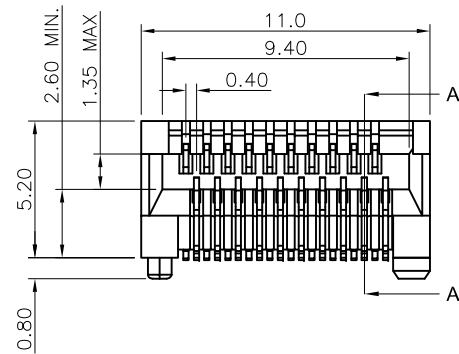
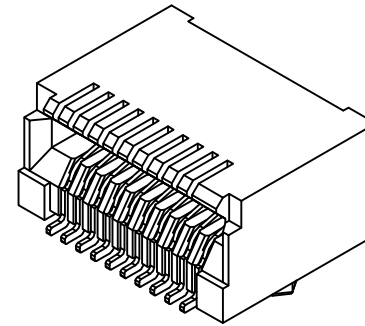
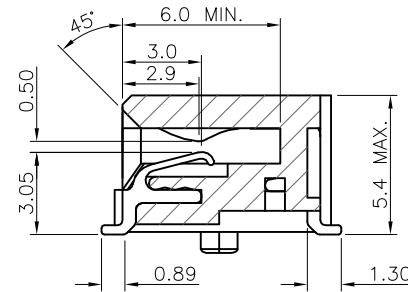


1	2	3	4	5	6	7	8	9	10
1	INITIAL RELEASE							JACK WU	2013/09/11
2	NEW FORM							JACK WU	2020/07/06
3									

SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 30 VAC
3. Differential Impedance: 100Ω
4. Insulation Resistance: 500 mΩ MIN.500 VDC
5. Operating Life: 250 Cycles Min.
6. Operating Temperature: -40°C ~ +85°C

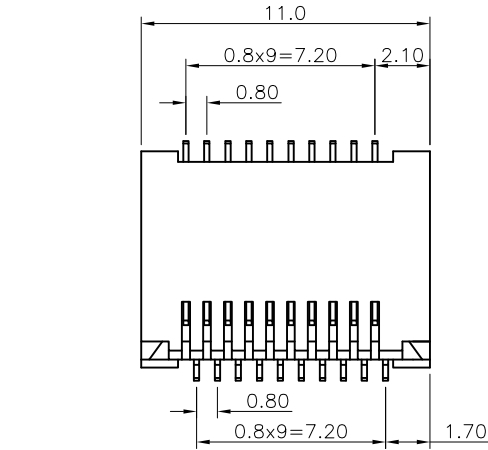

RECOMMENDED P.C.B LAYOUT

2.	CONTACT	Phos-Bronze, Gold Flash on Contact Area		
1.	HOUSING	LCP UL94 V-0, Black		
NO.	PART NAME	DESCRIPTION		
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :		Chunxin Technology
		X, ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°		
SCALE		DWN	20130911	
1 : 1		JACK WU		
SHEET		CHK	20130911	
1/1		PETER WANG		
SIZE		APVD	20130911	
A4		SIMON LI		
CUSTOMER DRAWING				
				</