



1	INITIAL RELEASE	JACK WU	2013/11/18
2	NEW FORM	JACK WU	2020/12/12
3			

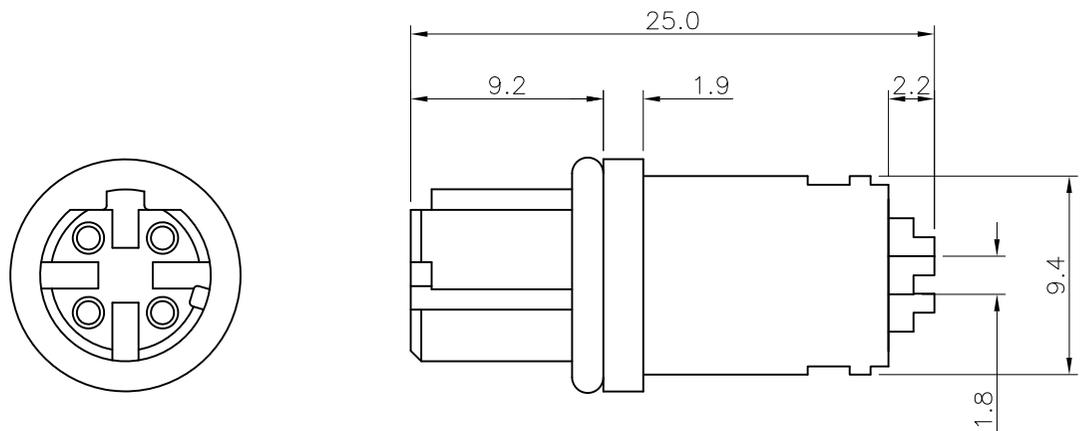

**SPECIFICATION:**

1. Current Rating: 5A
2. Voltage Rating: 125V
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

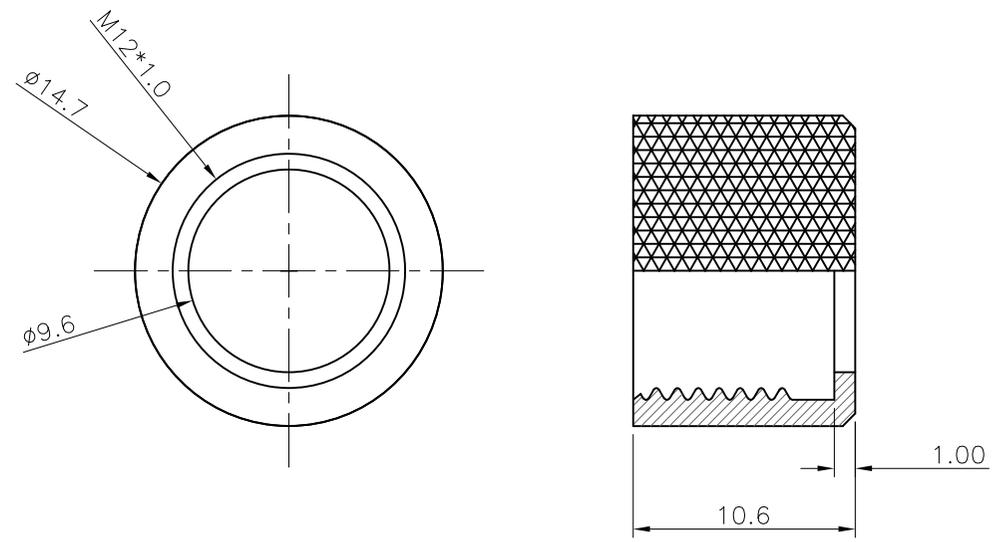

**NUT**

**TABLE A**

CX2-12FD104-71	CX2-12FD105-71

4.	NUT	Brass, Nickel Plated
3.	O-RING	EPDM
2.	CONTACT	Brass, 10u" Gold Plated over Nickel
1.	HOUSING	TPU, Black

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		<p><b>Chunxin Technology</b></p> <p>NAME</p> <p>M12 D Code Molding Type Socket, Straight Solder Pin</p>
TOLERANCES UNLESS OTHERWISE SPECIFIED :		
	X, X.X, X.XX	± 0.30, ± 0.20, ± 0.10
	ANGLES	± 3°
SCALE	1 : 1	DWN JACK WU 20131118
SHEET	1/1	CHK PETER WANG 20131118
SIZE	A4	APVD SIMON LI 20131118
CUSTOMER DRAWING		PRODUCT No. SEE TABLE A
		DRAWING No. WP-M12S07