


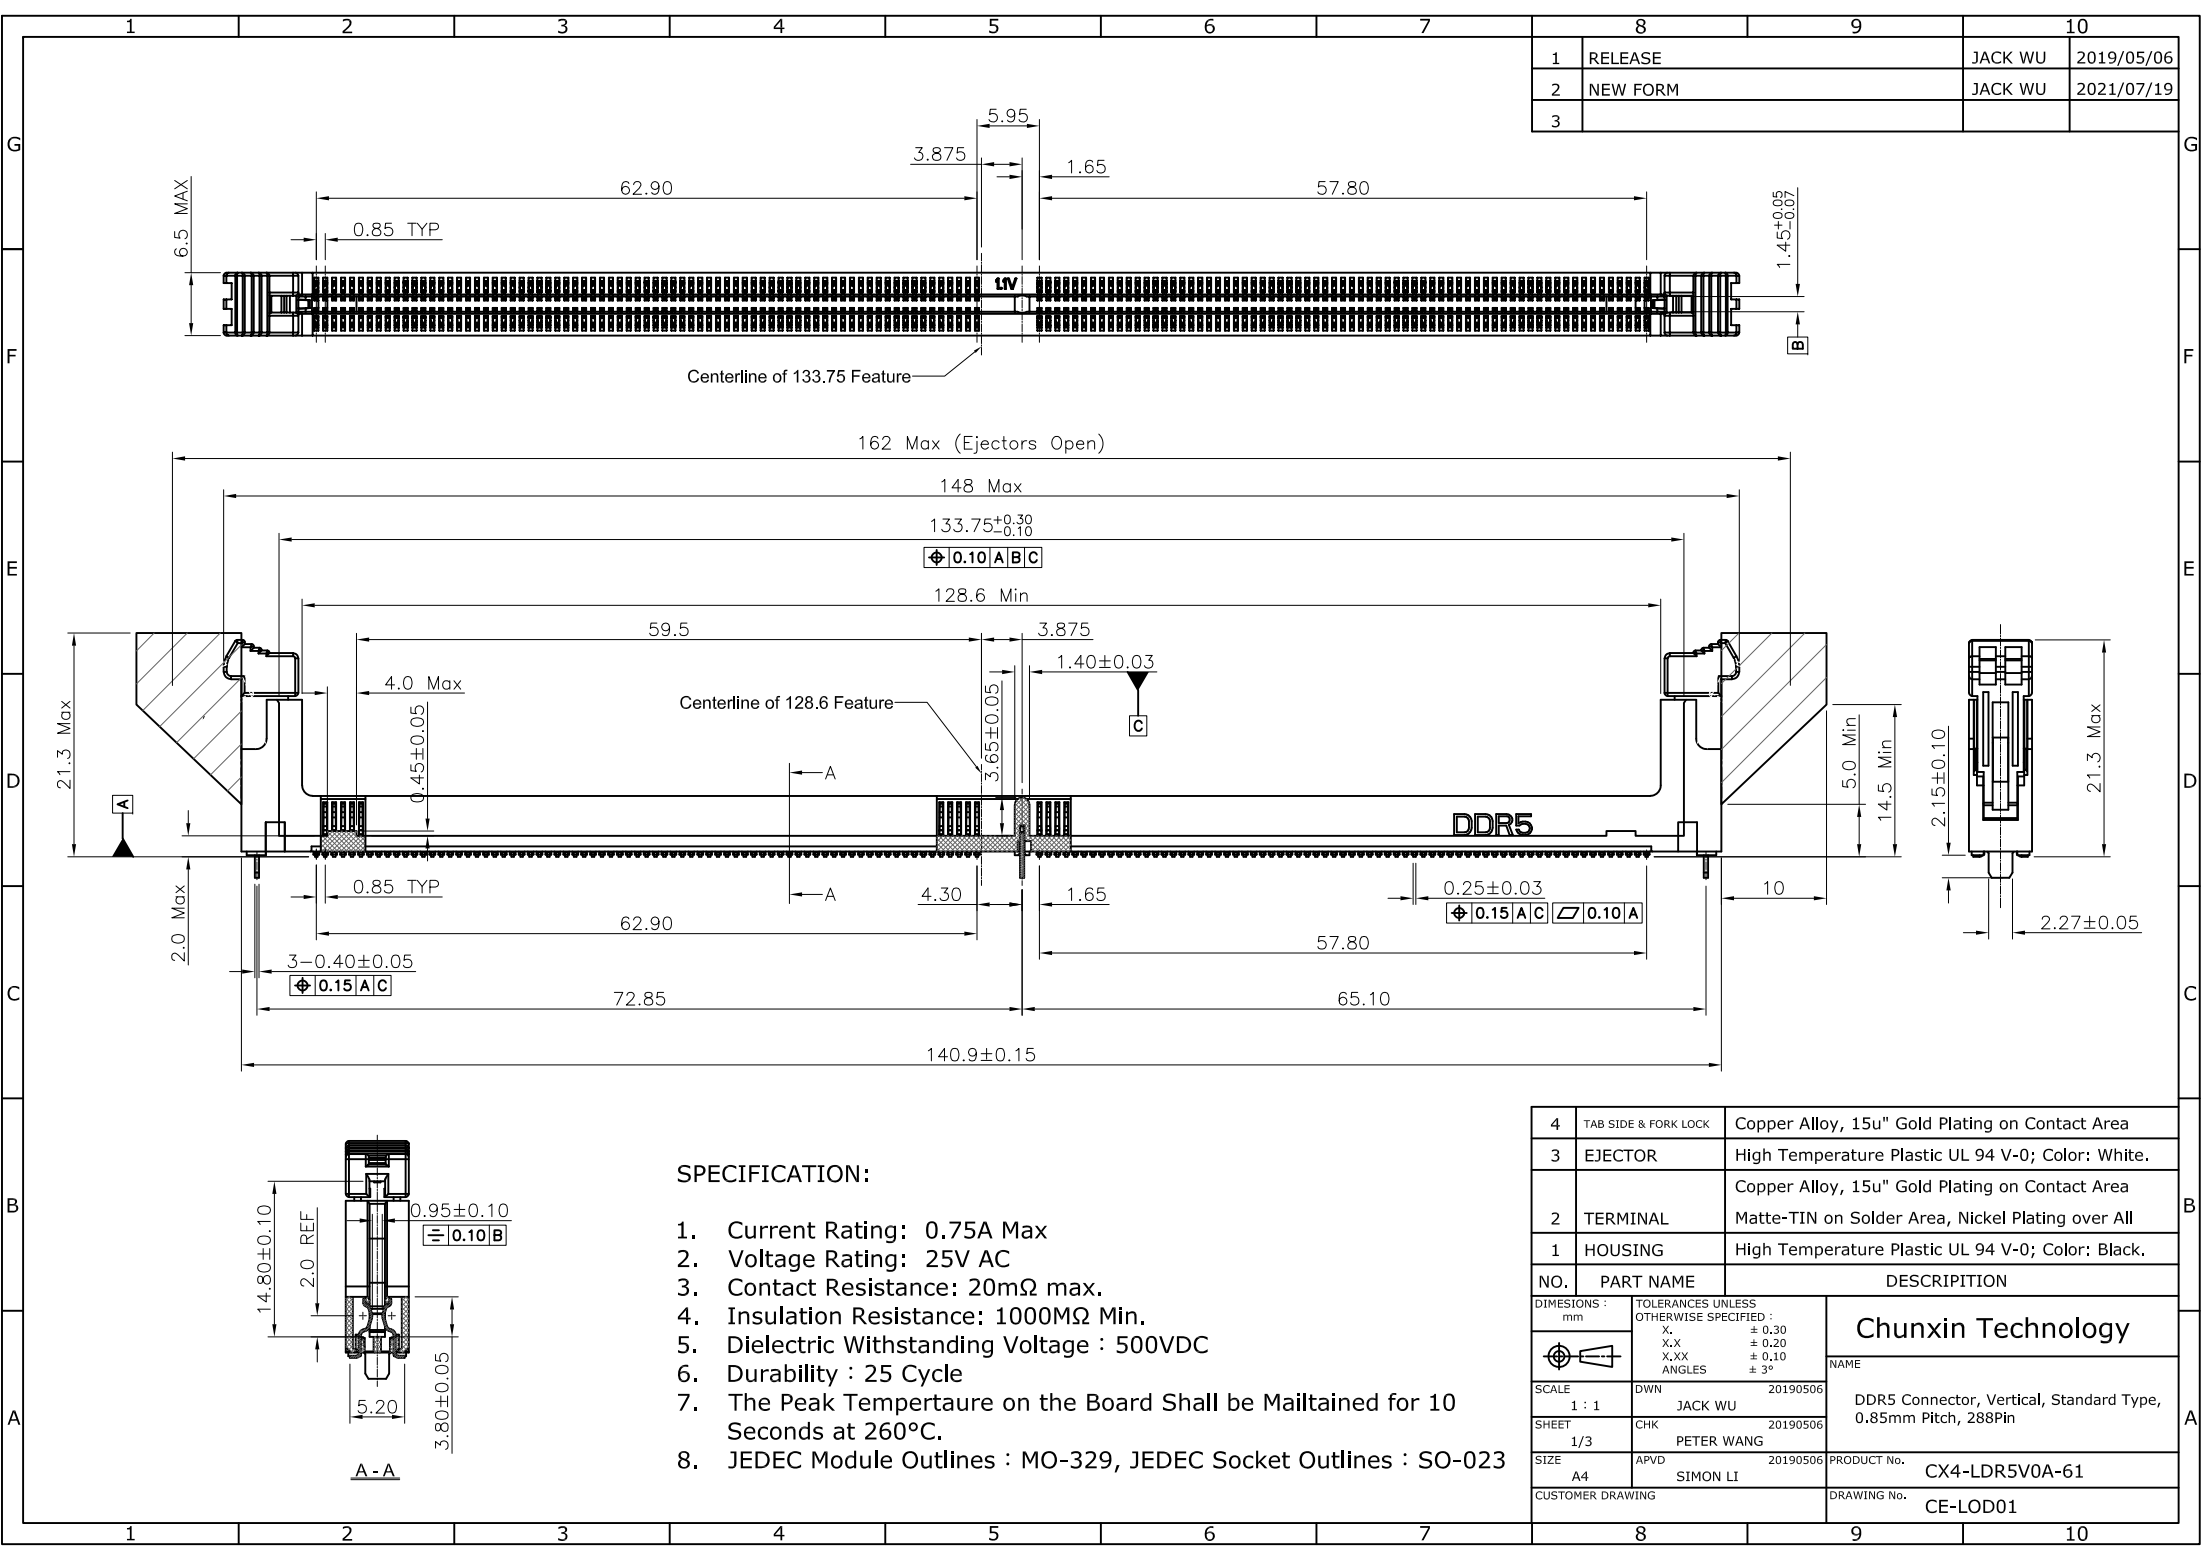


1	RELEASE	JACK WU	2019/05/06
2	NEW FORM	JACK WU	2021/07/19
3			

SPECIFICATION:

1. Current Rating: 0.75A Max
2. Voltage Rating: 25V AC
3. Contact Resistance: 20mΩ max.
4. Insulation Resistance: 1000MΩ Min.
5. Dielectric Withstanding Voltage : 500VDC
6. Durability : 25 Cycle
7. The Peak Tempertaure on the Board Shall be Maitained for 10 Seconds at 260°C.
8. JEDEC Module Outlines : MO-329, JEDEC Socket Outlines : SO-023

4	TAB SIDE & FORK LOCK	Copper Alloy, 15u" Gold Plating on Contact Area
3	EJECTOR	High Temperature Plastic UL 94 V-0; Color: White.
		Copper Alloy, 15u" Gold Plating on Contact Area
2	TERMINAL	Matte-TIN on Solder Area, Nickel Plating over All
1	HOUSING	High Temperature Plastic UL 94 V-0; Color: Black.
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X. ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE	DWN	20190506
1 : 1	JACK WU	20190506
SHEET	CHK	20190506
1/3	PETER WANG	20190506
SIZE	APVD	20190506
A4	SIMON LI	20190506
CUSTOMER DRAWING		DRAWING No.
		CE-L0D01

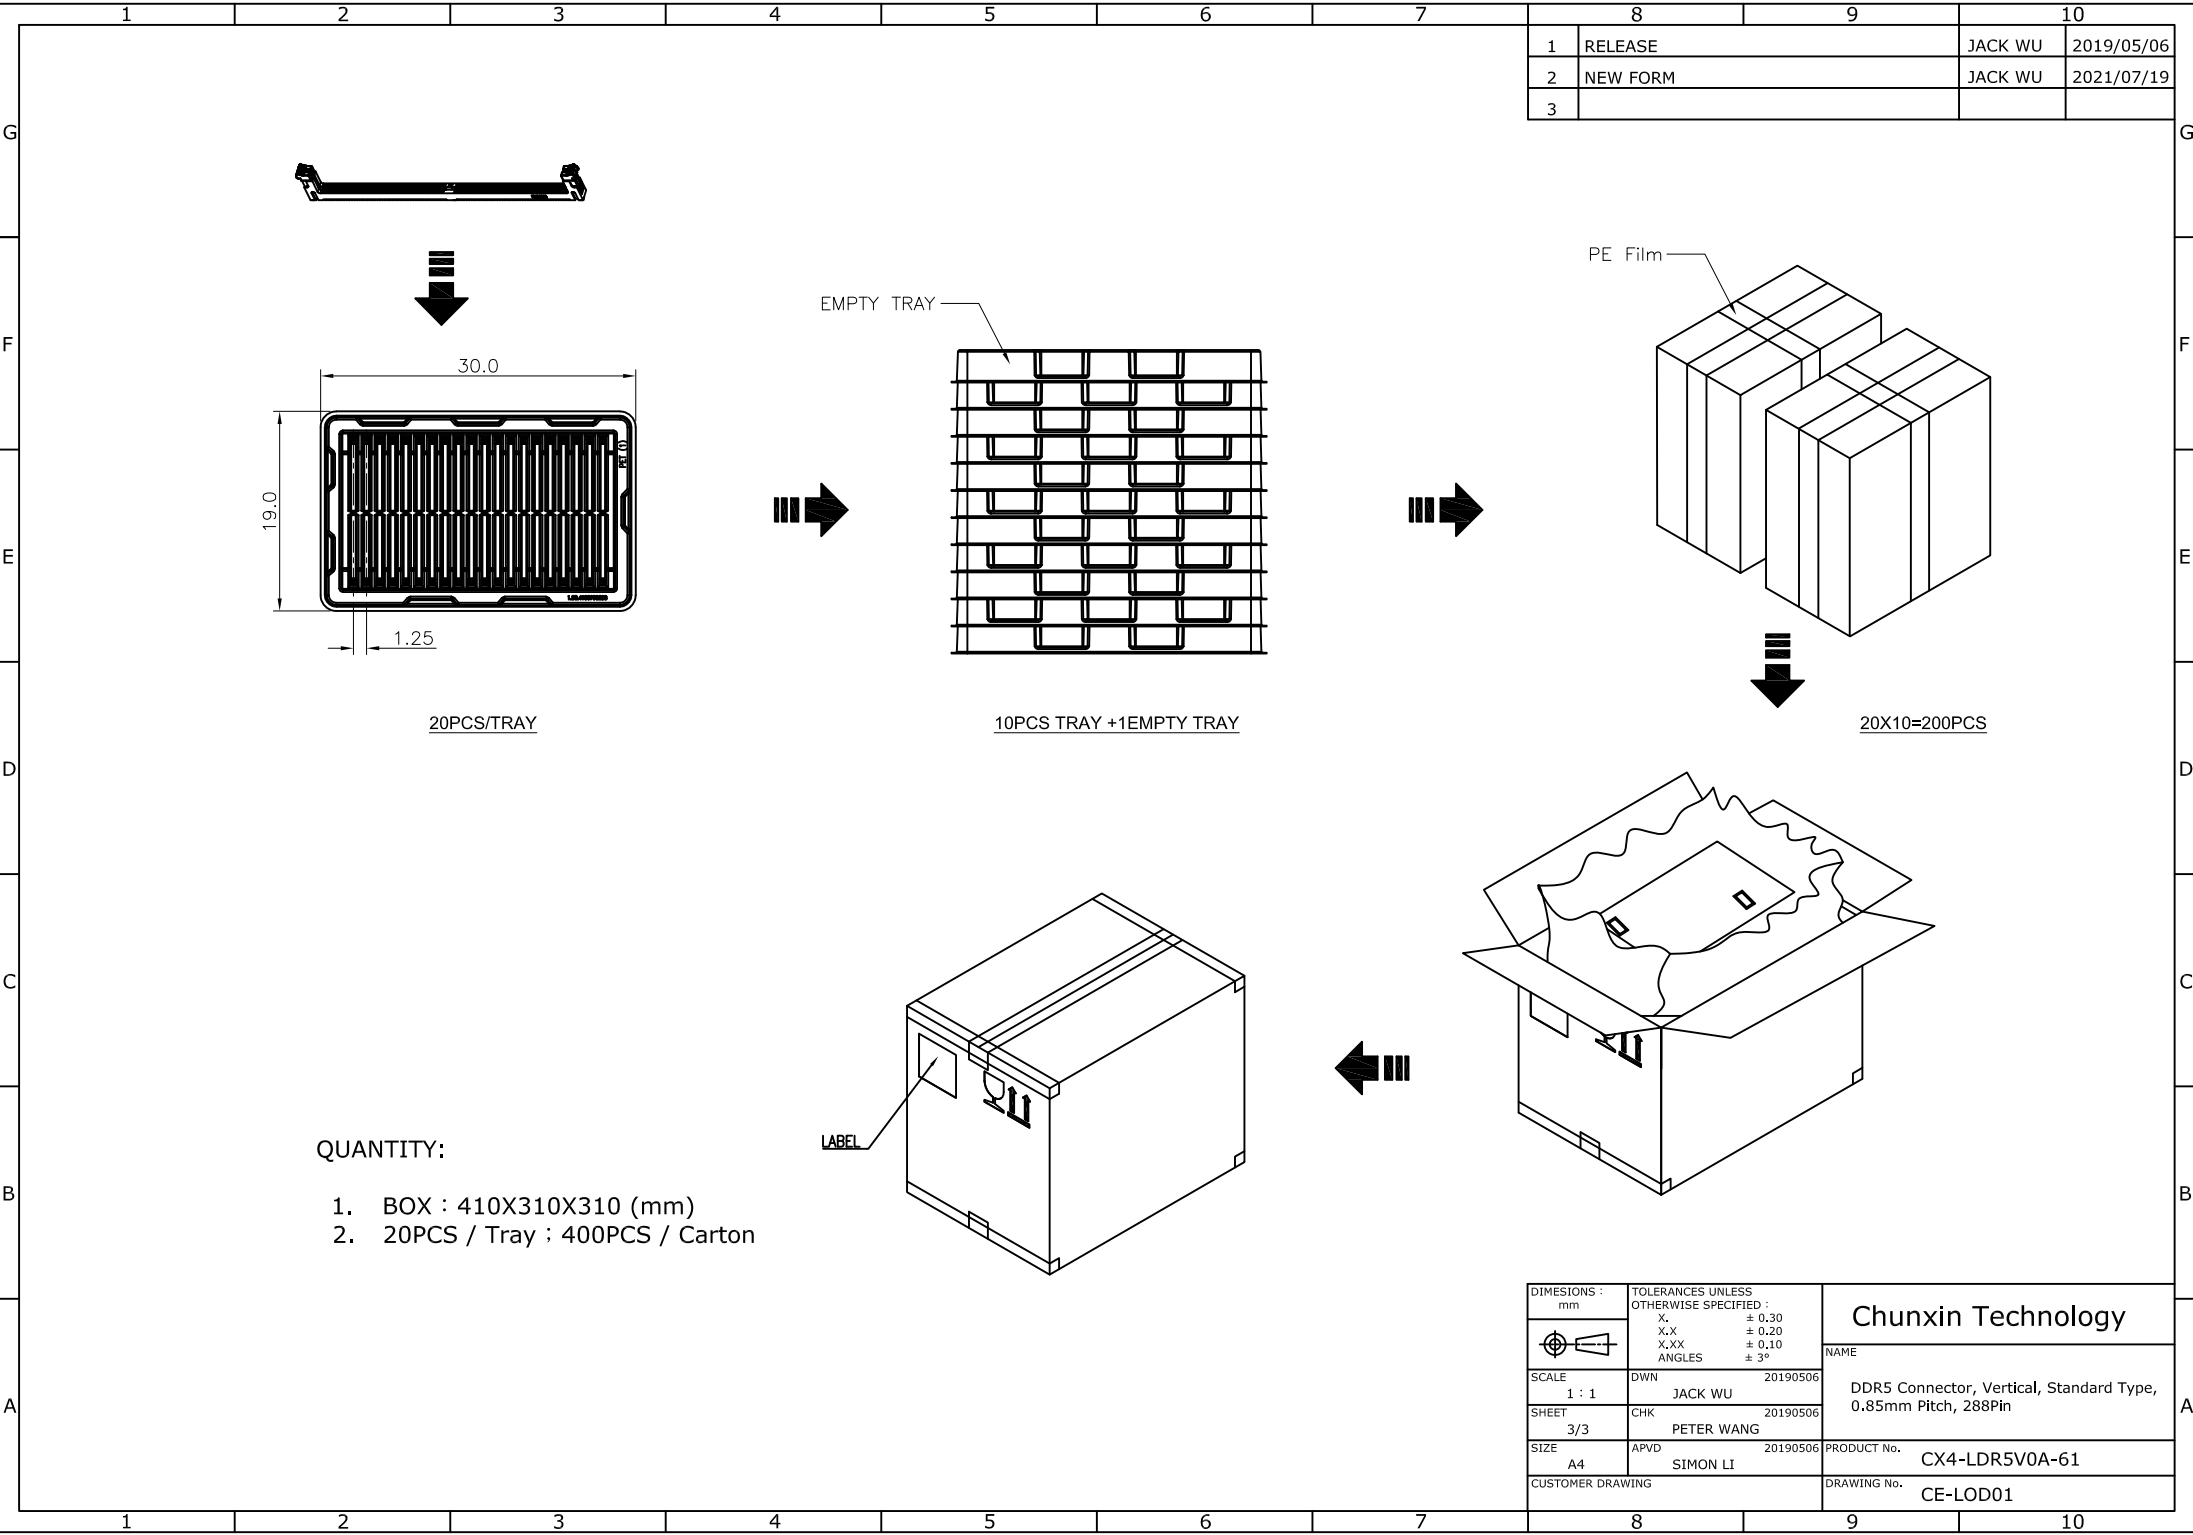

1	RELEASE	JACK WU	2019/05/06
2	NEW FORM	JACK WU	2021/07/19
3			

DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°		Chunxin Technology	
SCALE 1 : 1		DWN JACK WU		NAME DDR5 Connector, Vertical, Standard Type, 0.85mm Pitch, 288Pin	
SHEET 3/3		CHK PETER WANG		PRODUCT No. CX4-LDR5V0A-61	
SIZE A4		APVD SIMON LI		DRAWING No. CE-L0D01	
CUSTOMER DRAWING					