



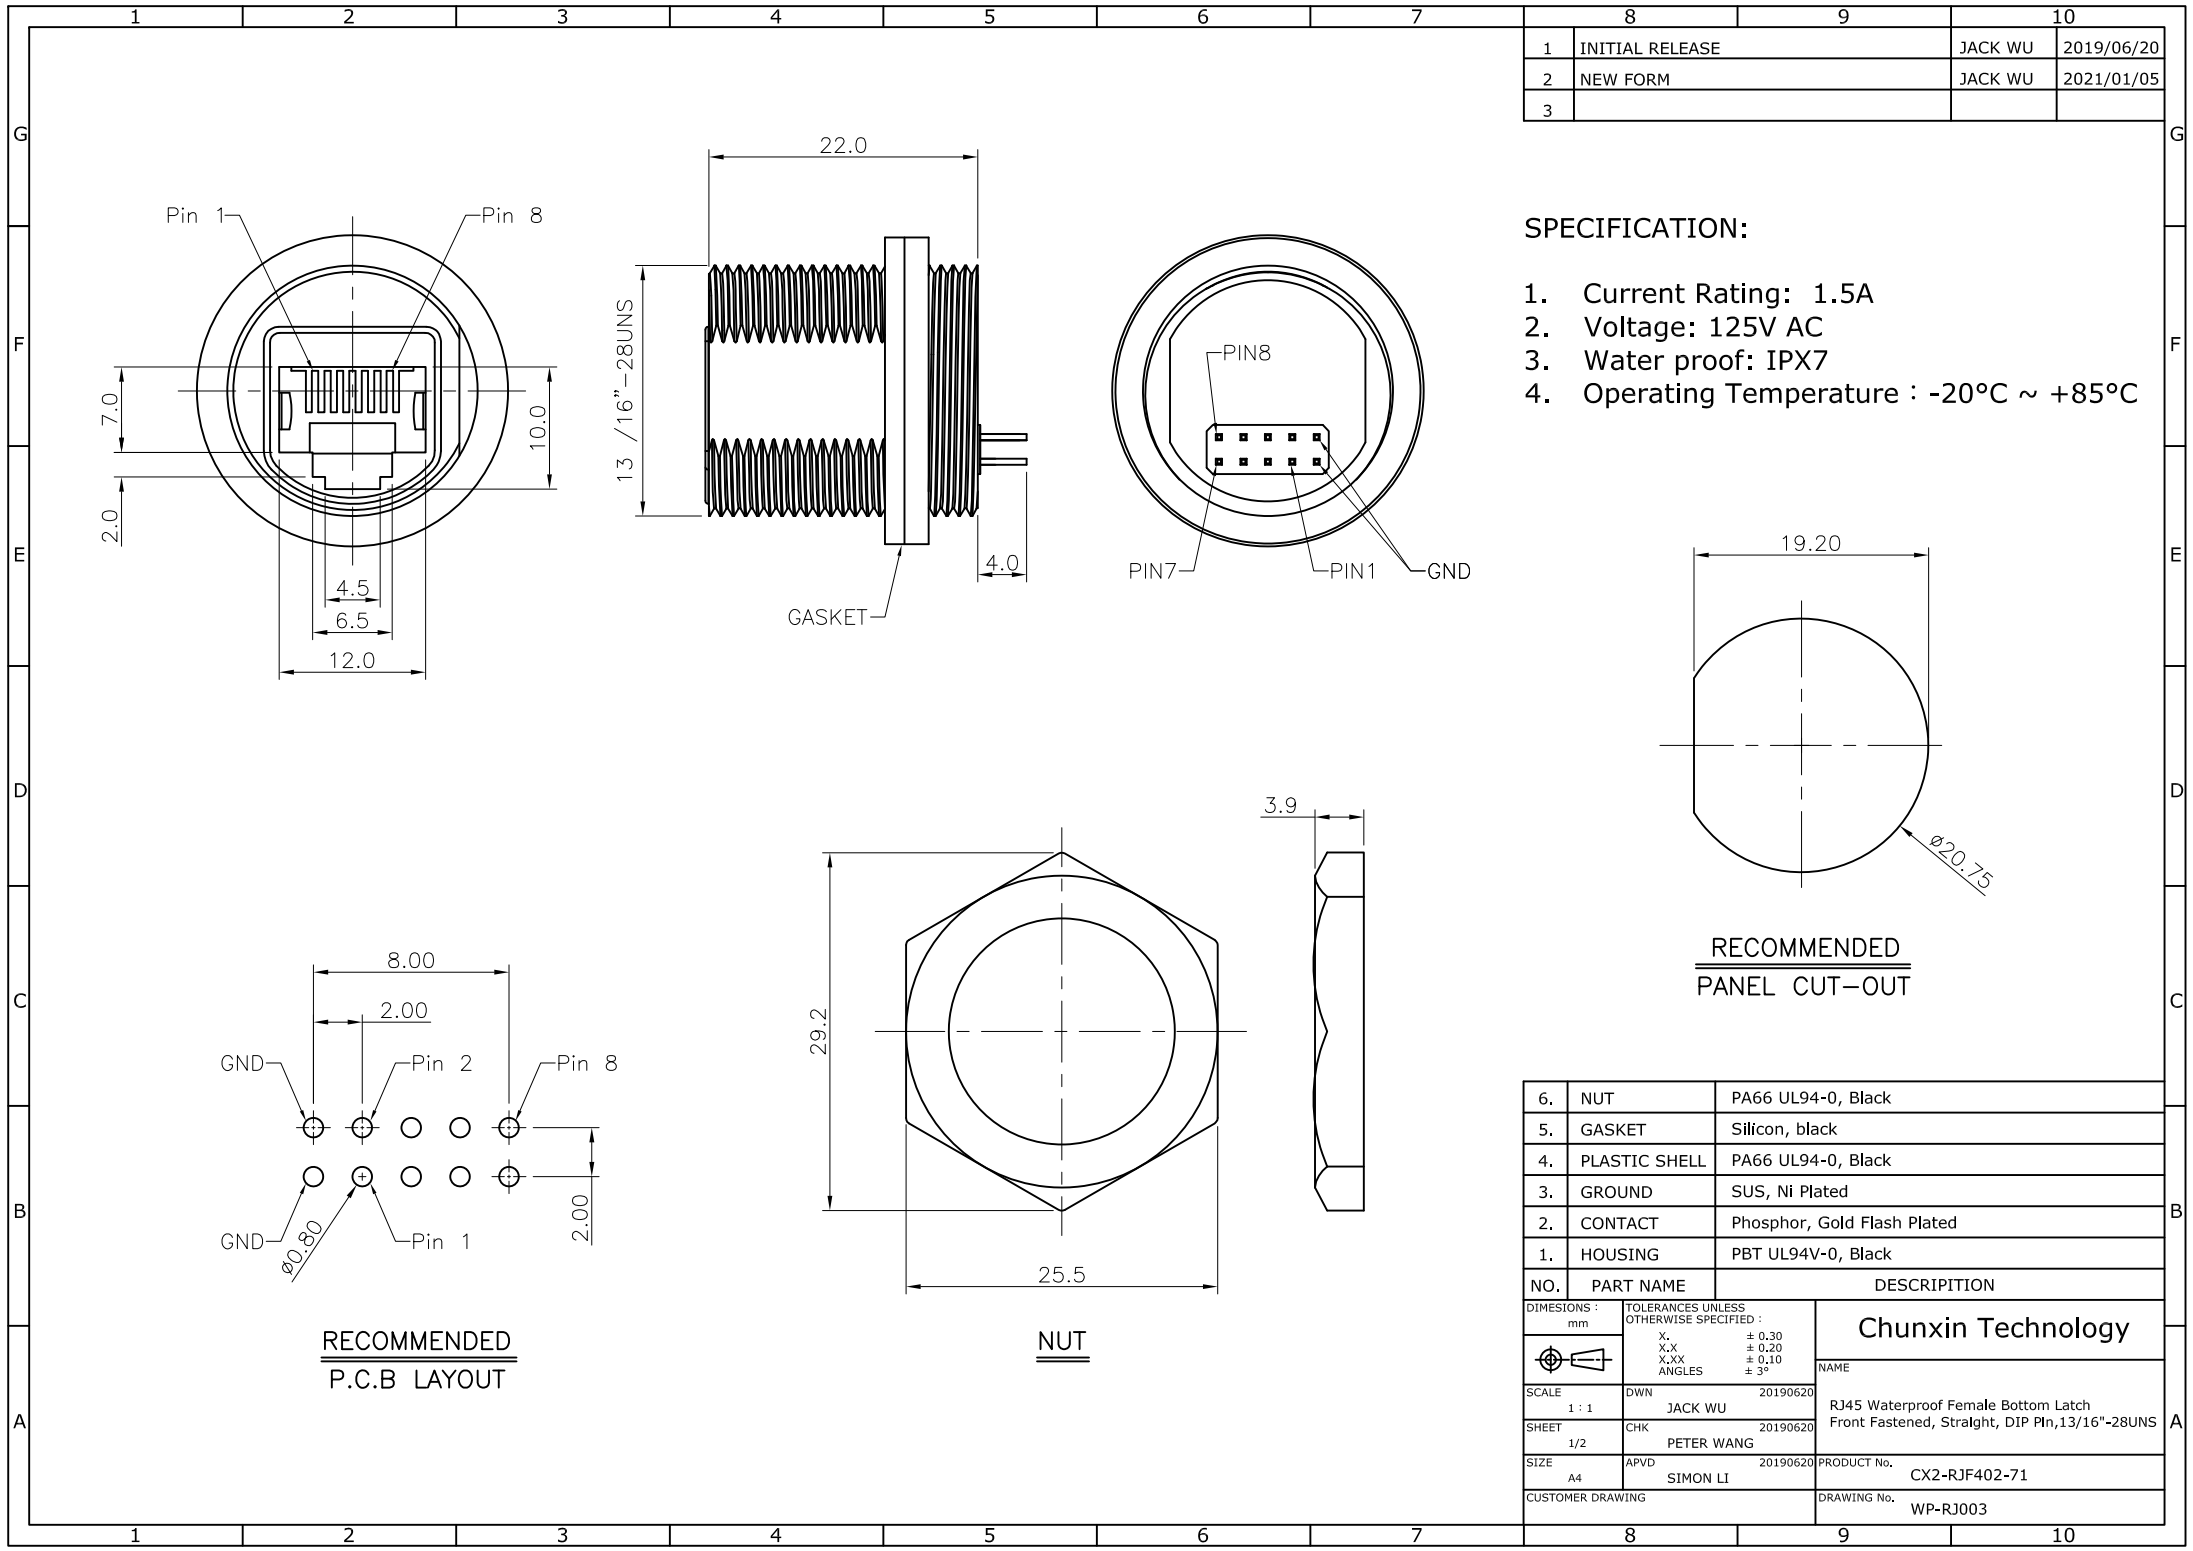


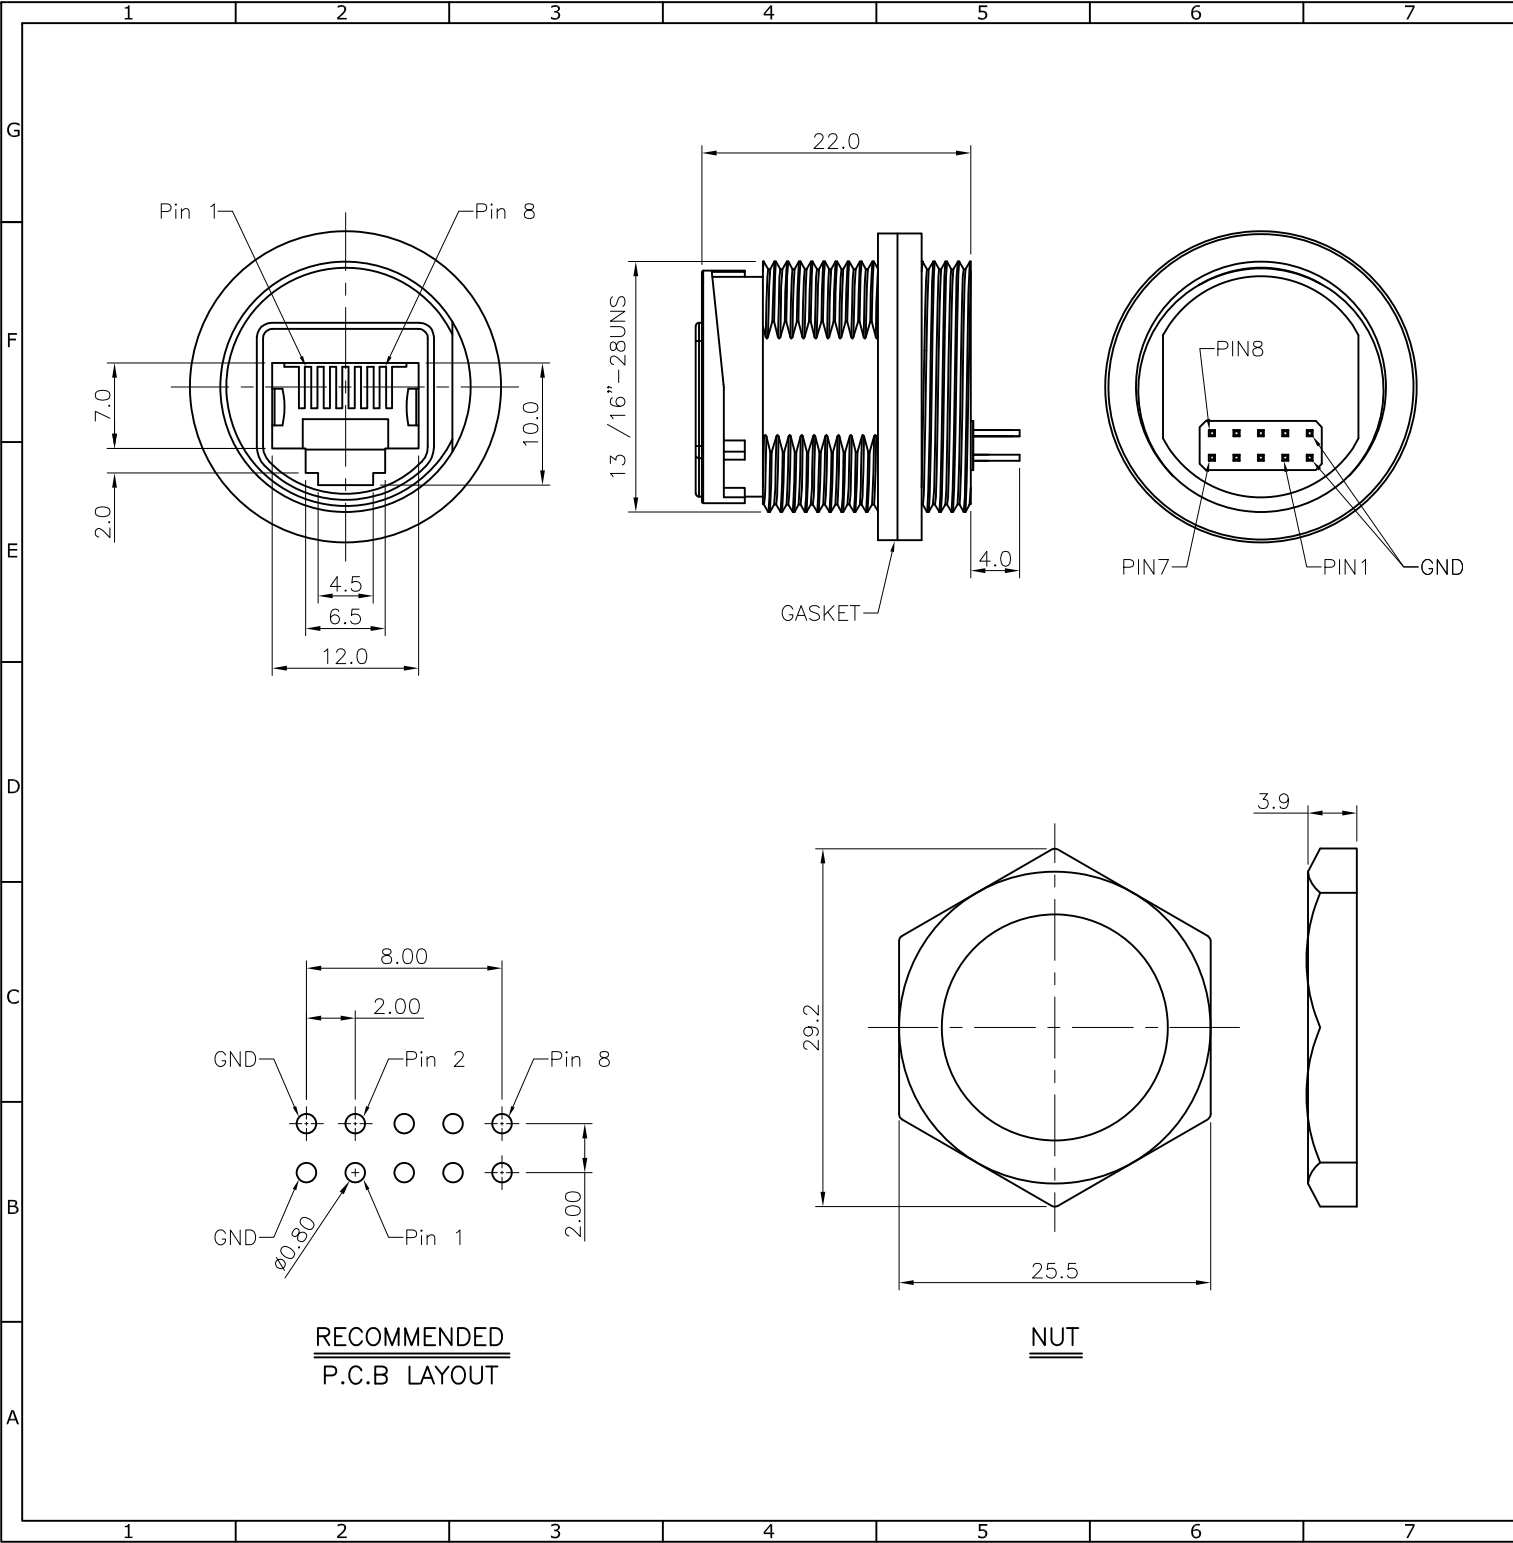

8		9		10	
1	INITIAL RELEASE	JACK WU		2019/06/12	
2	NEW FORM	JACK WU		2021/01/10	
3					

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage: 125V AC
3. Water proof: IPX7
4. Operating Temperature : -20℃ ~ +85℃

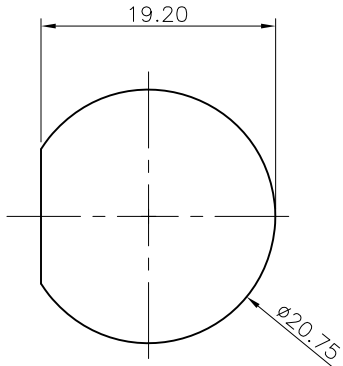

RECOMMENDED
PANEL CUT-OUT

6.	NUT	PA66 UL94-0, Black	B
5.	GASKET	Silicon, black	
4.	PLASTIC SHELL	PA66 UL94-0, Black	
3.	GROUND	SUS, Ni Plated	
2.	CONTACT	Phosphor, Gold Flash Plated	
1.	HOUSING	PBT UL94V-0, Black	
NO.	PART NAME	DESCRIPTION	
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	Chunxin Technology
		NAME	
SCALE 1 : 1	DWN JACK WU	20190612	RJ45 Waterproof Female Bottom Latch Front Fastened Quick Lock, Stralght, DIP Pin, 13/16"-28UNS
SHEET 2/2	CHK PETER WANG	20190612	A
SIZE A4	APVD SIMON LI	20190612	PRODUCT No. CX2-RJF402-72
CUSTOMER DRAWING		DRAWING No. WP-RJ003	
8		9	10