


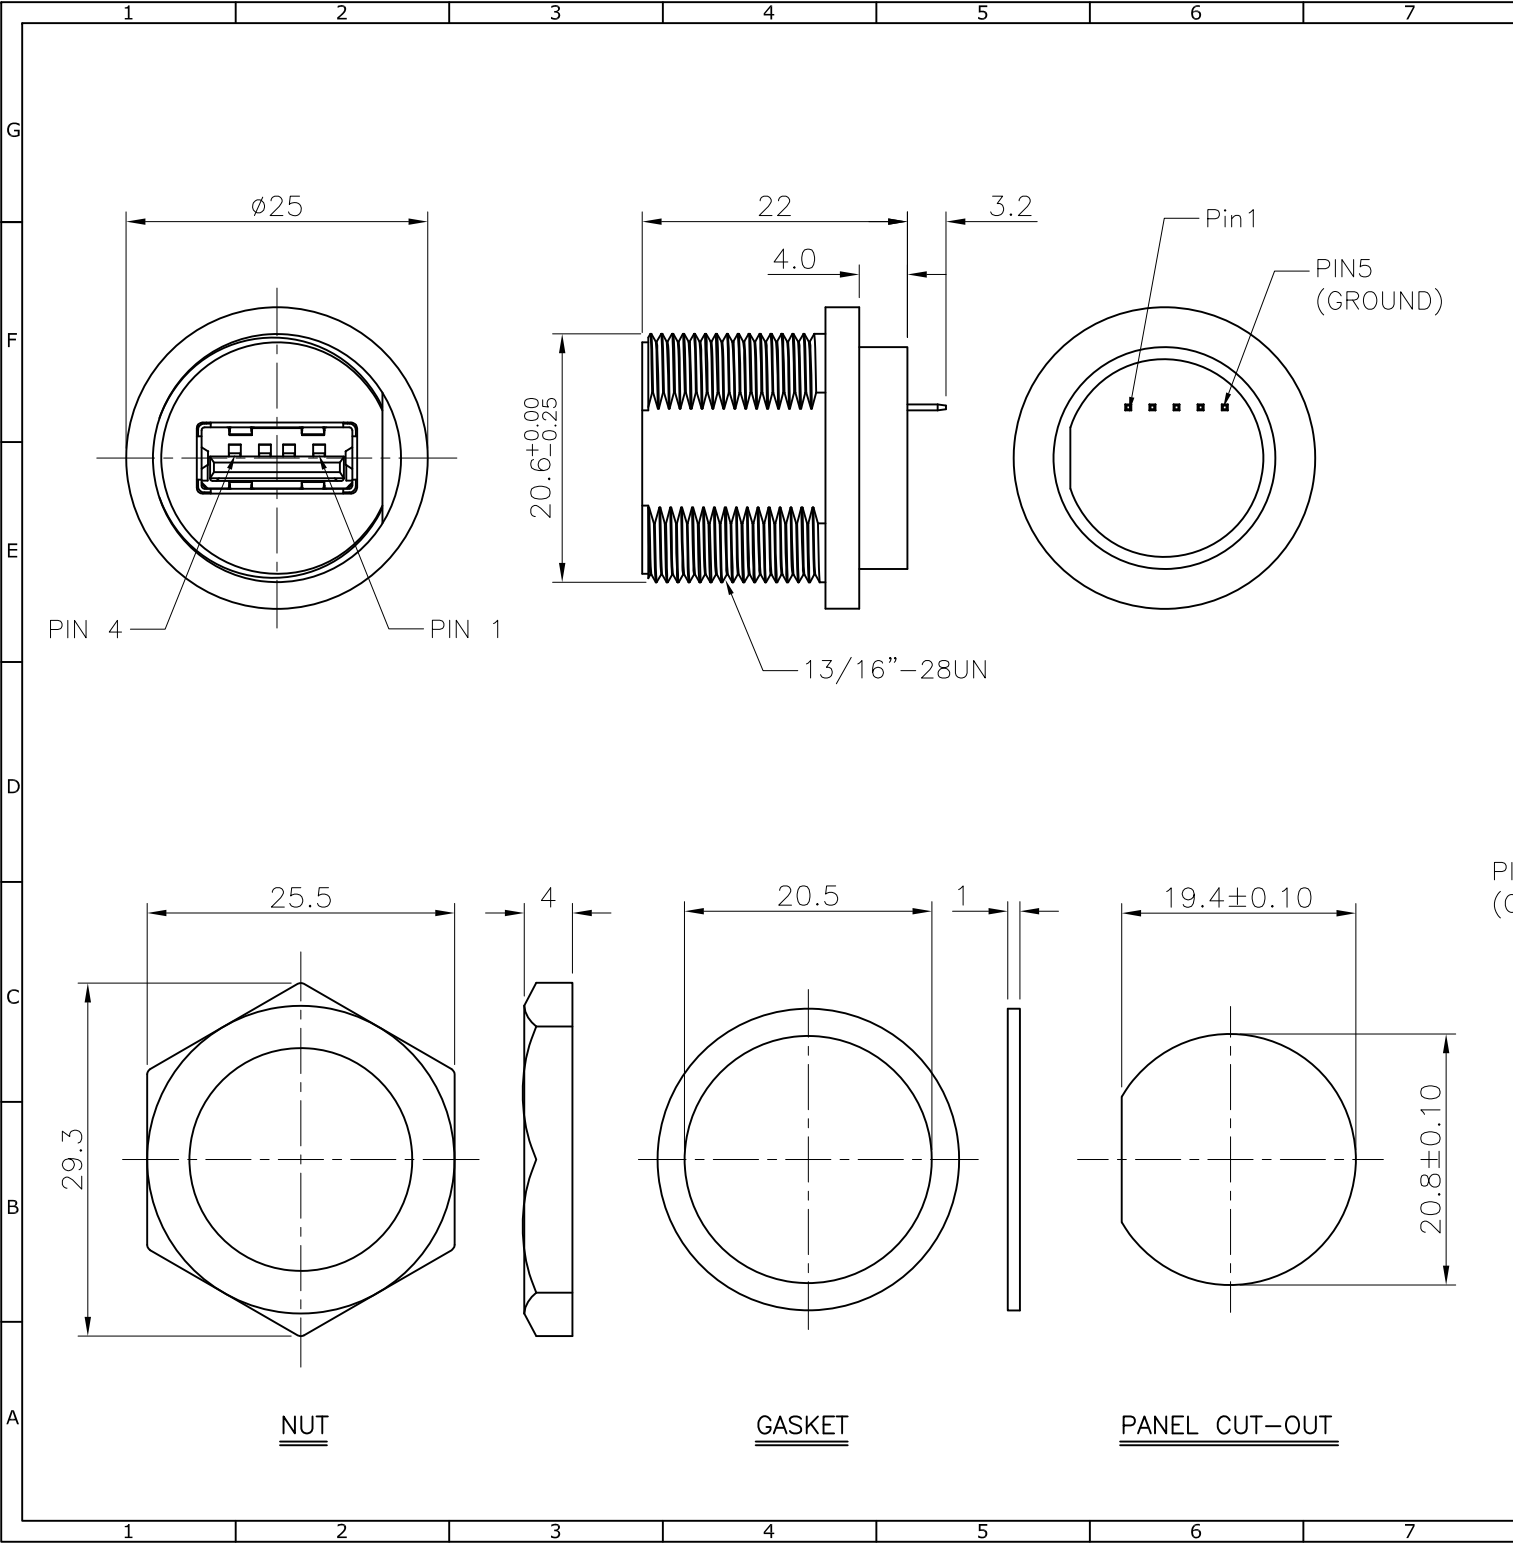

8		9		10	
1	INITIAL RELEASE	JACK WU	2019/04/17		
2	INITIAL RELEASE	JACK WU	2021/01/03		
3					

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 250V AC
3. Waterproof : IPX7.
4. Operating Temperature : -40°C~ +85°C

**PCB LAYOUT
(TOP VIEW)**

NO.	PART NAME	DESCRIPTION
6.	NUT	PA66 UL94V-0, Black
5.	GASKET	Silicon, Gray Black
4.	BODY	PA66 UL94V-0, Black
3.	GROUND	Brass, Ni Plated
2.	CONTACT	Phosphor Bronze, Gold Plating on Contact area
1.	HOUSING	PBT UL94V-0, Black

DIMENSIONS :		TOLERANCES UNLESS OTHERWISE SPECIFIED :		NAME		
mm						
		X.	± 0.30	Chunxin Technology		
		X.X	± 0.20			
		X.XX	± 0.10			
		ANGLES	± 3°			
		SCALE				DWN
1 : 1		CHK	JACK WU	USB 2.0 A Type Water Proof Female, Front Fastened Straight DIP Pin, 13/16"-28		
SHEET		1/2	PETER WANG			20190417
SIZE		A4	SIMON LI			20190417
CUSTOMER DRAWING				DRAWING No. WP-US003		

