

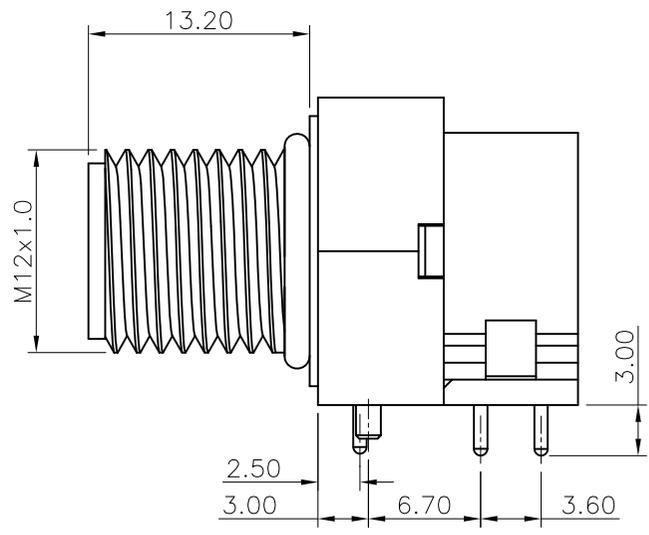


1	INITIAL RELEASE	JACK WU	2008/12/22
2	NEW FORM	JACK WU	2020/12/01
3			



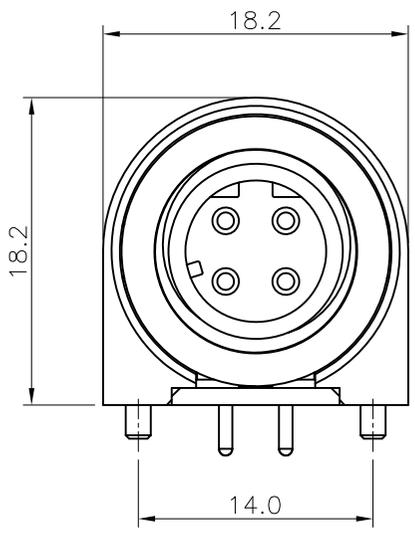


SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

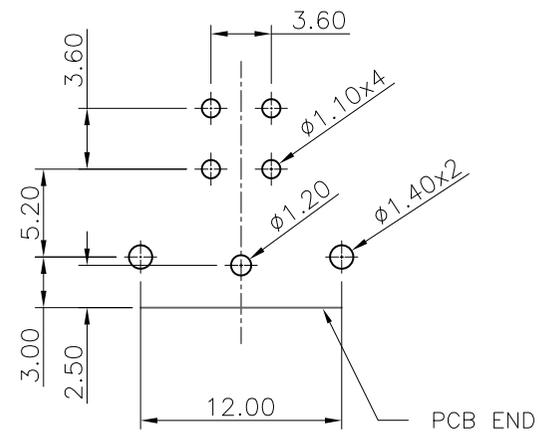

RECOMMEND P.C.B LAYOUT

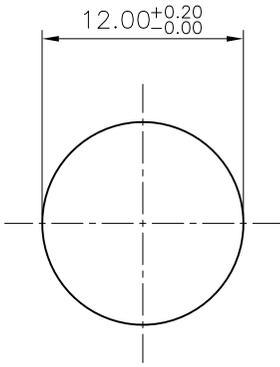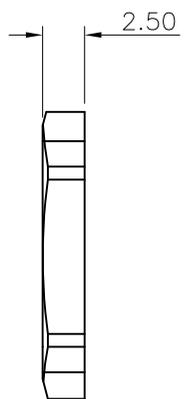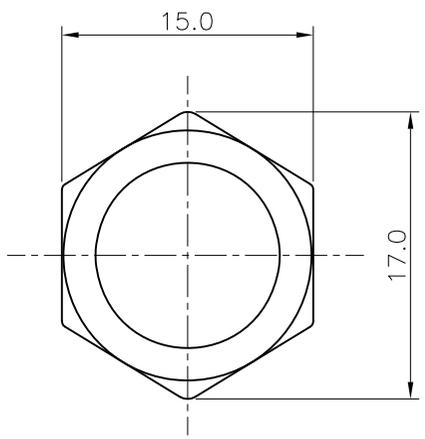

NUT

**RECOMMEND
PANEL CUT-OUT**

7.	NUT	Brass, Nickel Plated
6.	O-RING	EPDM, Black
5.	SHELL	Brass, Nickel Plated
4.	CONTACT	Brass, Gold Plated over Nickel
3.	DOWN HOUSING	PBT UL94 V-0, Black
2.	BACK HOUSING	PBT UL94 V-0, Black
1.	HOUSING	PBT UL94 V-0, Black

NO.	PART NAME	DESCRIPTION								
DIMENSIONS : mm										
TOLERANCES UNLESS OTHERWISE SPECIFIED :										
<table border="0"> <tr> <td>X.</td> <td>± 0.30</td> </tr> <tr> <td>X.X</td> <td>± 0.20</td> </tr> <tr> <td>X.XX</td> <td>± 0.10</td> </tr> <tr> <td>ANGLES</td> <td>± 3°</td> </tr> </table>			X.	± 0.30	X.X	± 0.20	X.XX	± 0.10	ANGLES	± 3°
X.	± 0.30									
X.X	± 0.20									
X.XX	± 0.10									
ANGLES	± 3°									
SCALE 1 : 1		NAME Chunxin Technology								
SHEET 1/1										
SIZE A4		PRODUCT No. CX2-12MD204-71								
CUSTOMER DRAWING										
		DRAWING No. WP-M12P07								