



1	INITIAL RELEASE	JACK WU	2010/02/25
2	NEW FORM	JACK WU	2020/04/23
3			

SPECIFICATION:






- CARD INSERTION SPECIFICATION :
 - Card Insertion Depth : 35.2mm REF
 - Card Thickness : 0.7mm~0.8mm
- READING CONTACT :
 - Position : According to ISO 07816-2 C1-C8.
 - Contact Force : 30 ~ 80 GRAM



SECTION A-A




NOMAL CLOSE

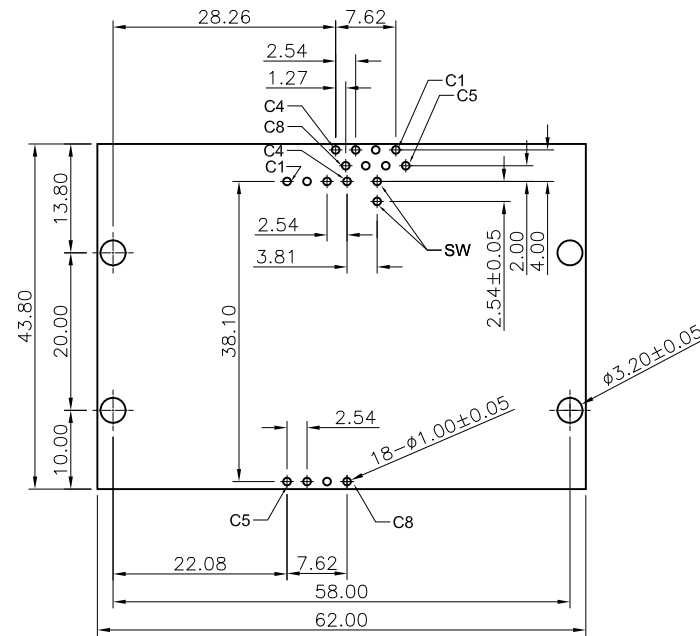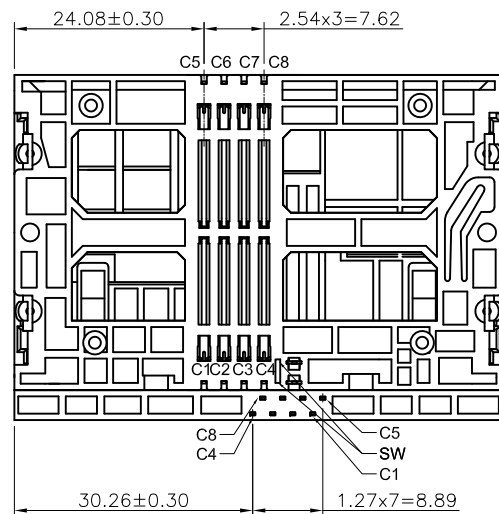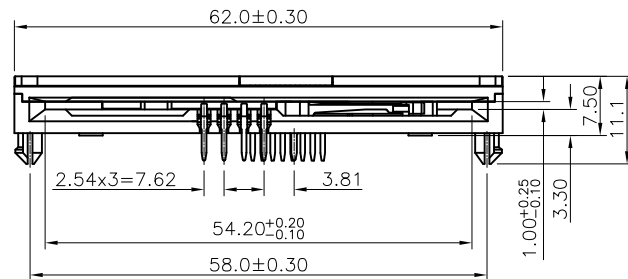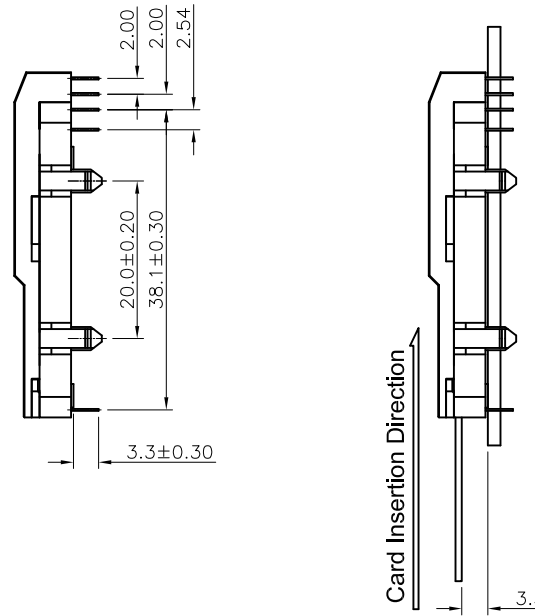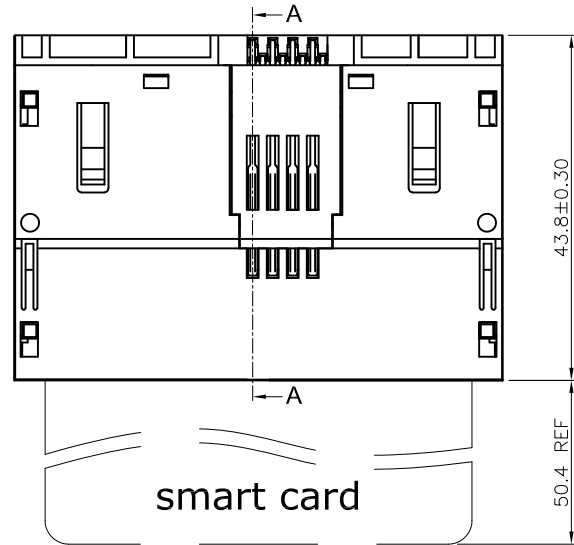

RECOMMEND P.C.B LAYOUT

3.	SWITCH	Copper Alloy, Gold Plating on Contact Area
2.	CONTACT	Copper Alloy, Gold Plating on Contact Area
1.	HOUSING	PBT, UL 94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		
TOLERANCES UNLESS OTHERWISE SPECIFIED :		
X. ± 0.30		
X.X ± 0.20		
X.XX ± 0.10		
ANGLES ± 3°		
SCALE 1 : 1		
SHEET 1/2		
SIZE A4		
CUSTOMER DRAWING		
NAME		
Chunxin Technology		
Smart Card Socket Push Pull Type, DIP Pin Two-sided Card Insertion		
PRODUCT No. CX1-SC101-41		
DRAWING No. CS-SC001		

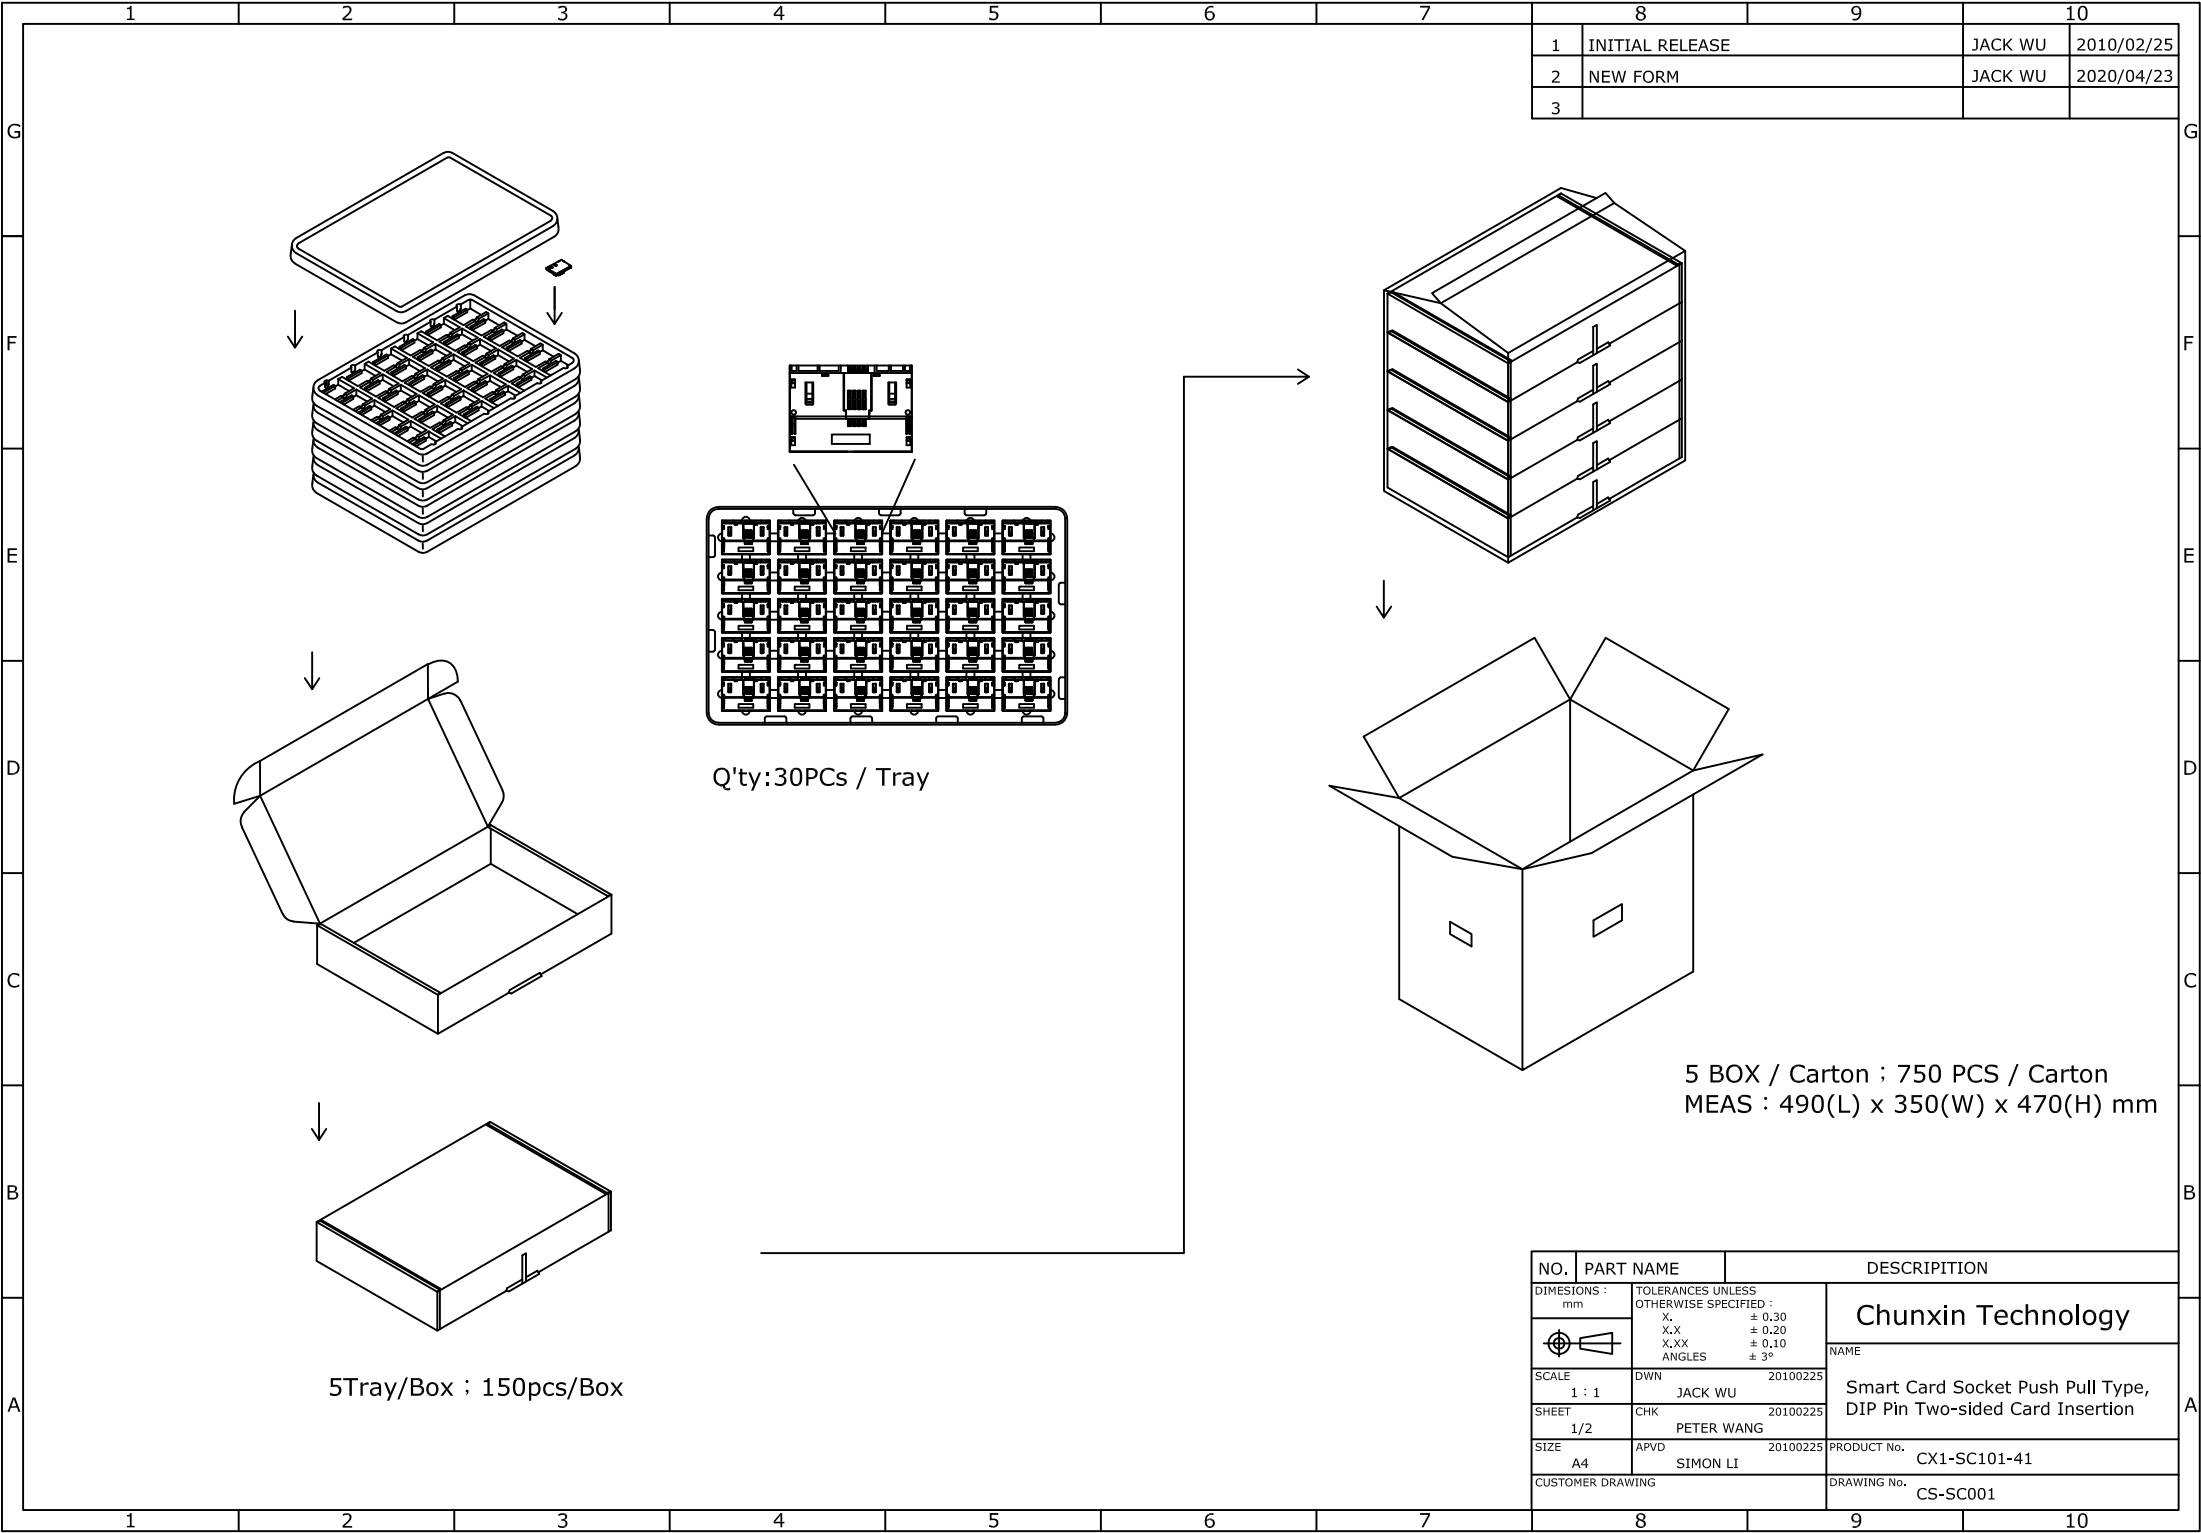

1	INITIAL RELEASE	JACK WU	2010/02/25
2	NEW FORM	JACK WU	2020/04/23
3			

Q'ty:30PCs / Tray

5 BOX / Carton : 750 PCS / Carton
MEAS : 490(L) x 350(W) x 470(H) mm

5Tray/Box ; 150pcs/Box

NO.	PART NAME	DESCRIPTION	
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :	
		X.	± 0.30
		X.X	± 0.20
		X.XX	± 0.10
		ANGLES	± 3°
SCALE	DWN	20100225	Chunxin Technology NAME Smart Card Socket Push Pull Type, DIP Pin Two-sided Card Insertion
1 : 1	JACK WU	20100225	
SHEET	CHK	PETER WANG	
1/2			
SIZE	APVD	20100225	PRODUCT No. CX1-SC101-41
A4	SIMON LI		
CUSTOMER DRAWING		DRAWING No. CS-SC001	