

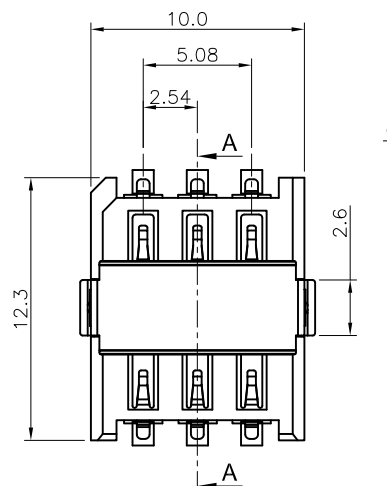


SECTION: A-A

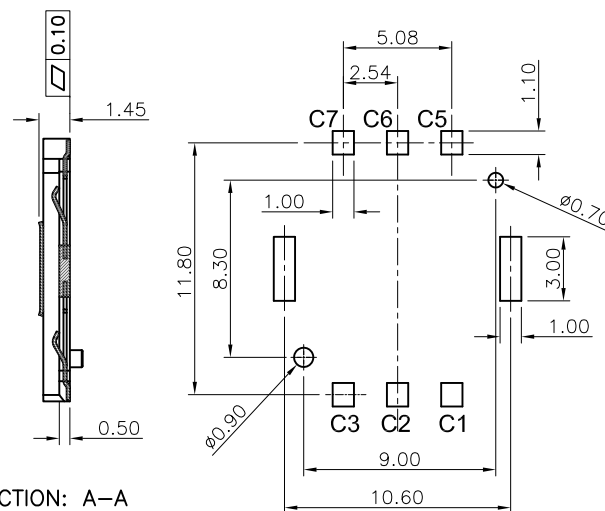

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

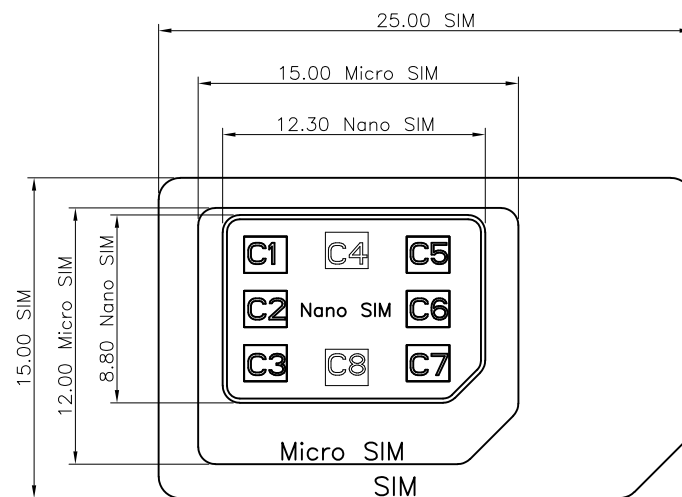

NANO SIM CARD
REFERENCE DATA


SPECIFICATION:

1. Current Rating: 0.5A
2. Rated Voltage: 30V AC
3. Contact Resistance: 100m Ω Max.
4. Insulator Resistance: 500M Ω Min.
5. Withstanding Voltage: 500V AC
6. Durability: 5,000 Cycles
7. Operating Temperature: -20°C~+85°C


PIN NO.	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

3.	SHELL	Stainless Steel , Gold Plating on Solder Area
2.	CONTACT	Copper Alloy , Gold Plating on Contact Area
1.	HOUSING	Hi-Temp Thermoplastic UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES $\pm 3^\circ$	NAME Chunxin Technology
SCALE 1 : 1	DWN JACK WU	20151008 Nano SIM Socket Push pull Type 8Pin, H=1.45mm
SHEET 1/2	CHK PETER WANG	20151008
SIZE A4	APVD SIMON LI	20151008 PRODUCT No. CX1-NSM6101-41
CUSTOMER DRAWING		DRAWING No. CS-NSIM001







1	INITIAL RELEASE	JACK WU	2015/10/08
2	NEW FORM	JACK WU	2020/05/11
3			

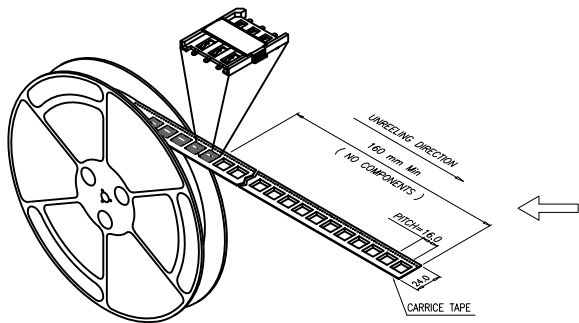

EMPTY THE FIRST SEVENTEEN GRIDS OF THE TAPE REEL. (500 MM MIN)



EMPTY THE LAST SEVEN GRIDS OF THE TAPE REEL. (360 MM MIN)

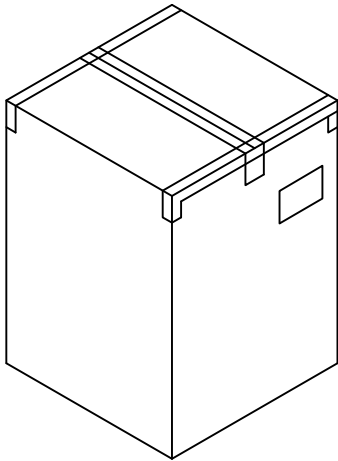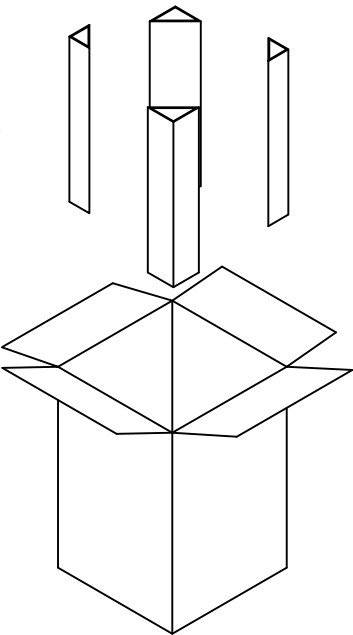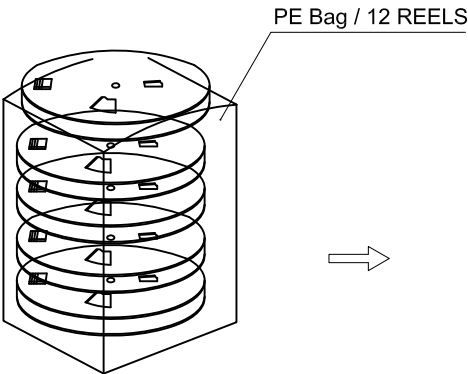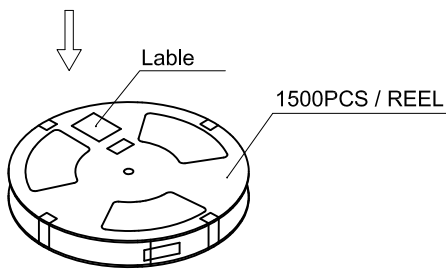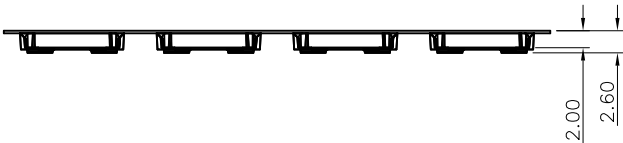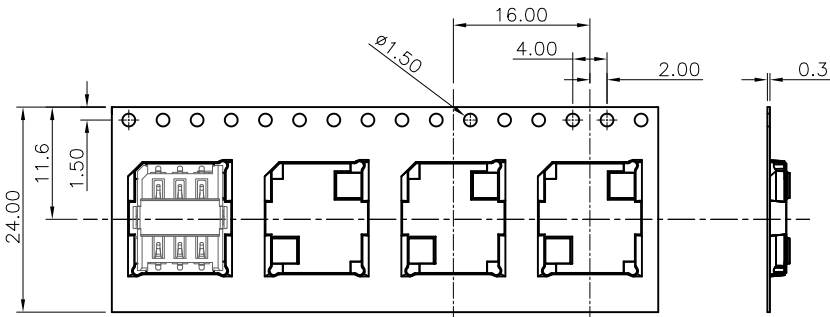

NOTES

1. NUMBER OF CONNECTORS :
1,500 PCS / REEL ;
18,000 PCS / CARTON
2. CARTON : 345mm x 345mm x 410mm

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	NAME Chunxin Technology
SCALE 1 : X	DWN JACK WU 20151008	PRODUCT No. CX1-NSM6101-41
SHEET 2/2	CHK PETER WANG 20151008	DRAWING No. CS-NSIM001
SIZE A4	APVD SIMON LI 20151008	
CUSTOMER DRAWING		