
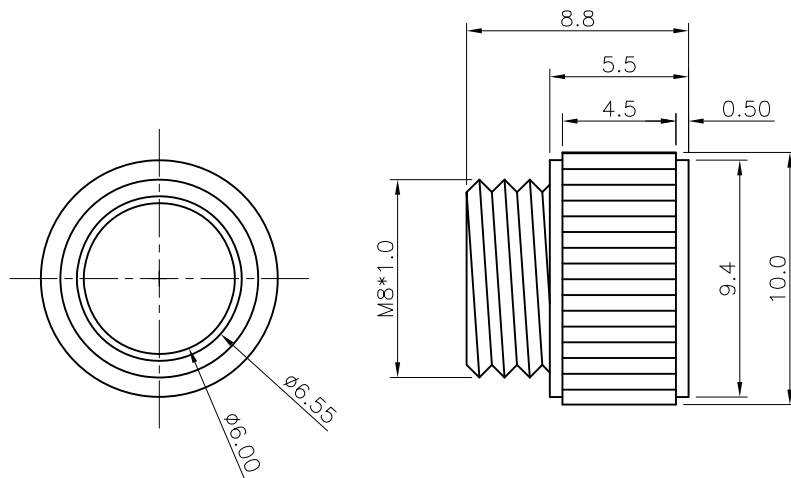


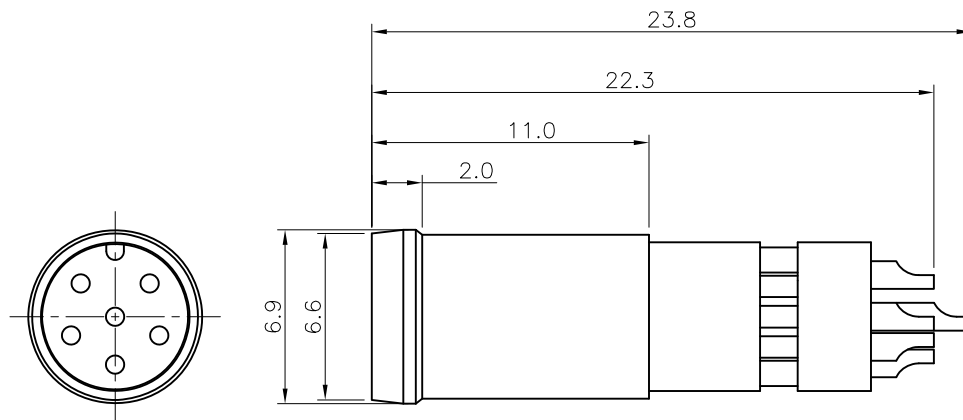

NUT

SPECIFICATION:

1. Current Rating: 5Pin 3A ; 6Pin 2A
2. Voltage Rating: 30V
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 105°C

TABLE A

CX2-8MA15-71	CX2-8MA16-71

3.	NUT	Brass, Nickel Plated
2.	CONTACT	BRASS, Gold Plated Over Nickel
1.	HOUSING	PA66 UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°
SCALE	1 : 1	DWN JACK WU 20120319
SHEET	1/1	CHK PETER WANG 20120319
SIZE	A4	APVD SIMON LI 20120319
CUSTOMER DRAWING		PRODUCT No. SEE TABLE A
		DRAWING No. WP-M8P04

Chunxin Technology

NAME
M8 A Code Molding Type Plug,
Straight Solder Pin