



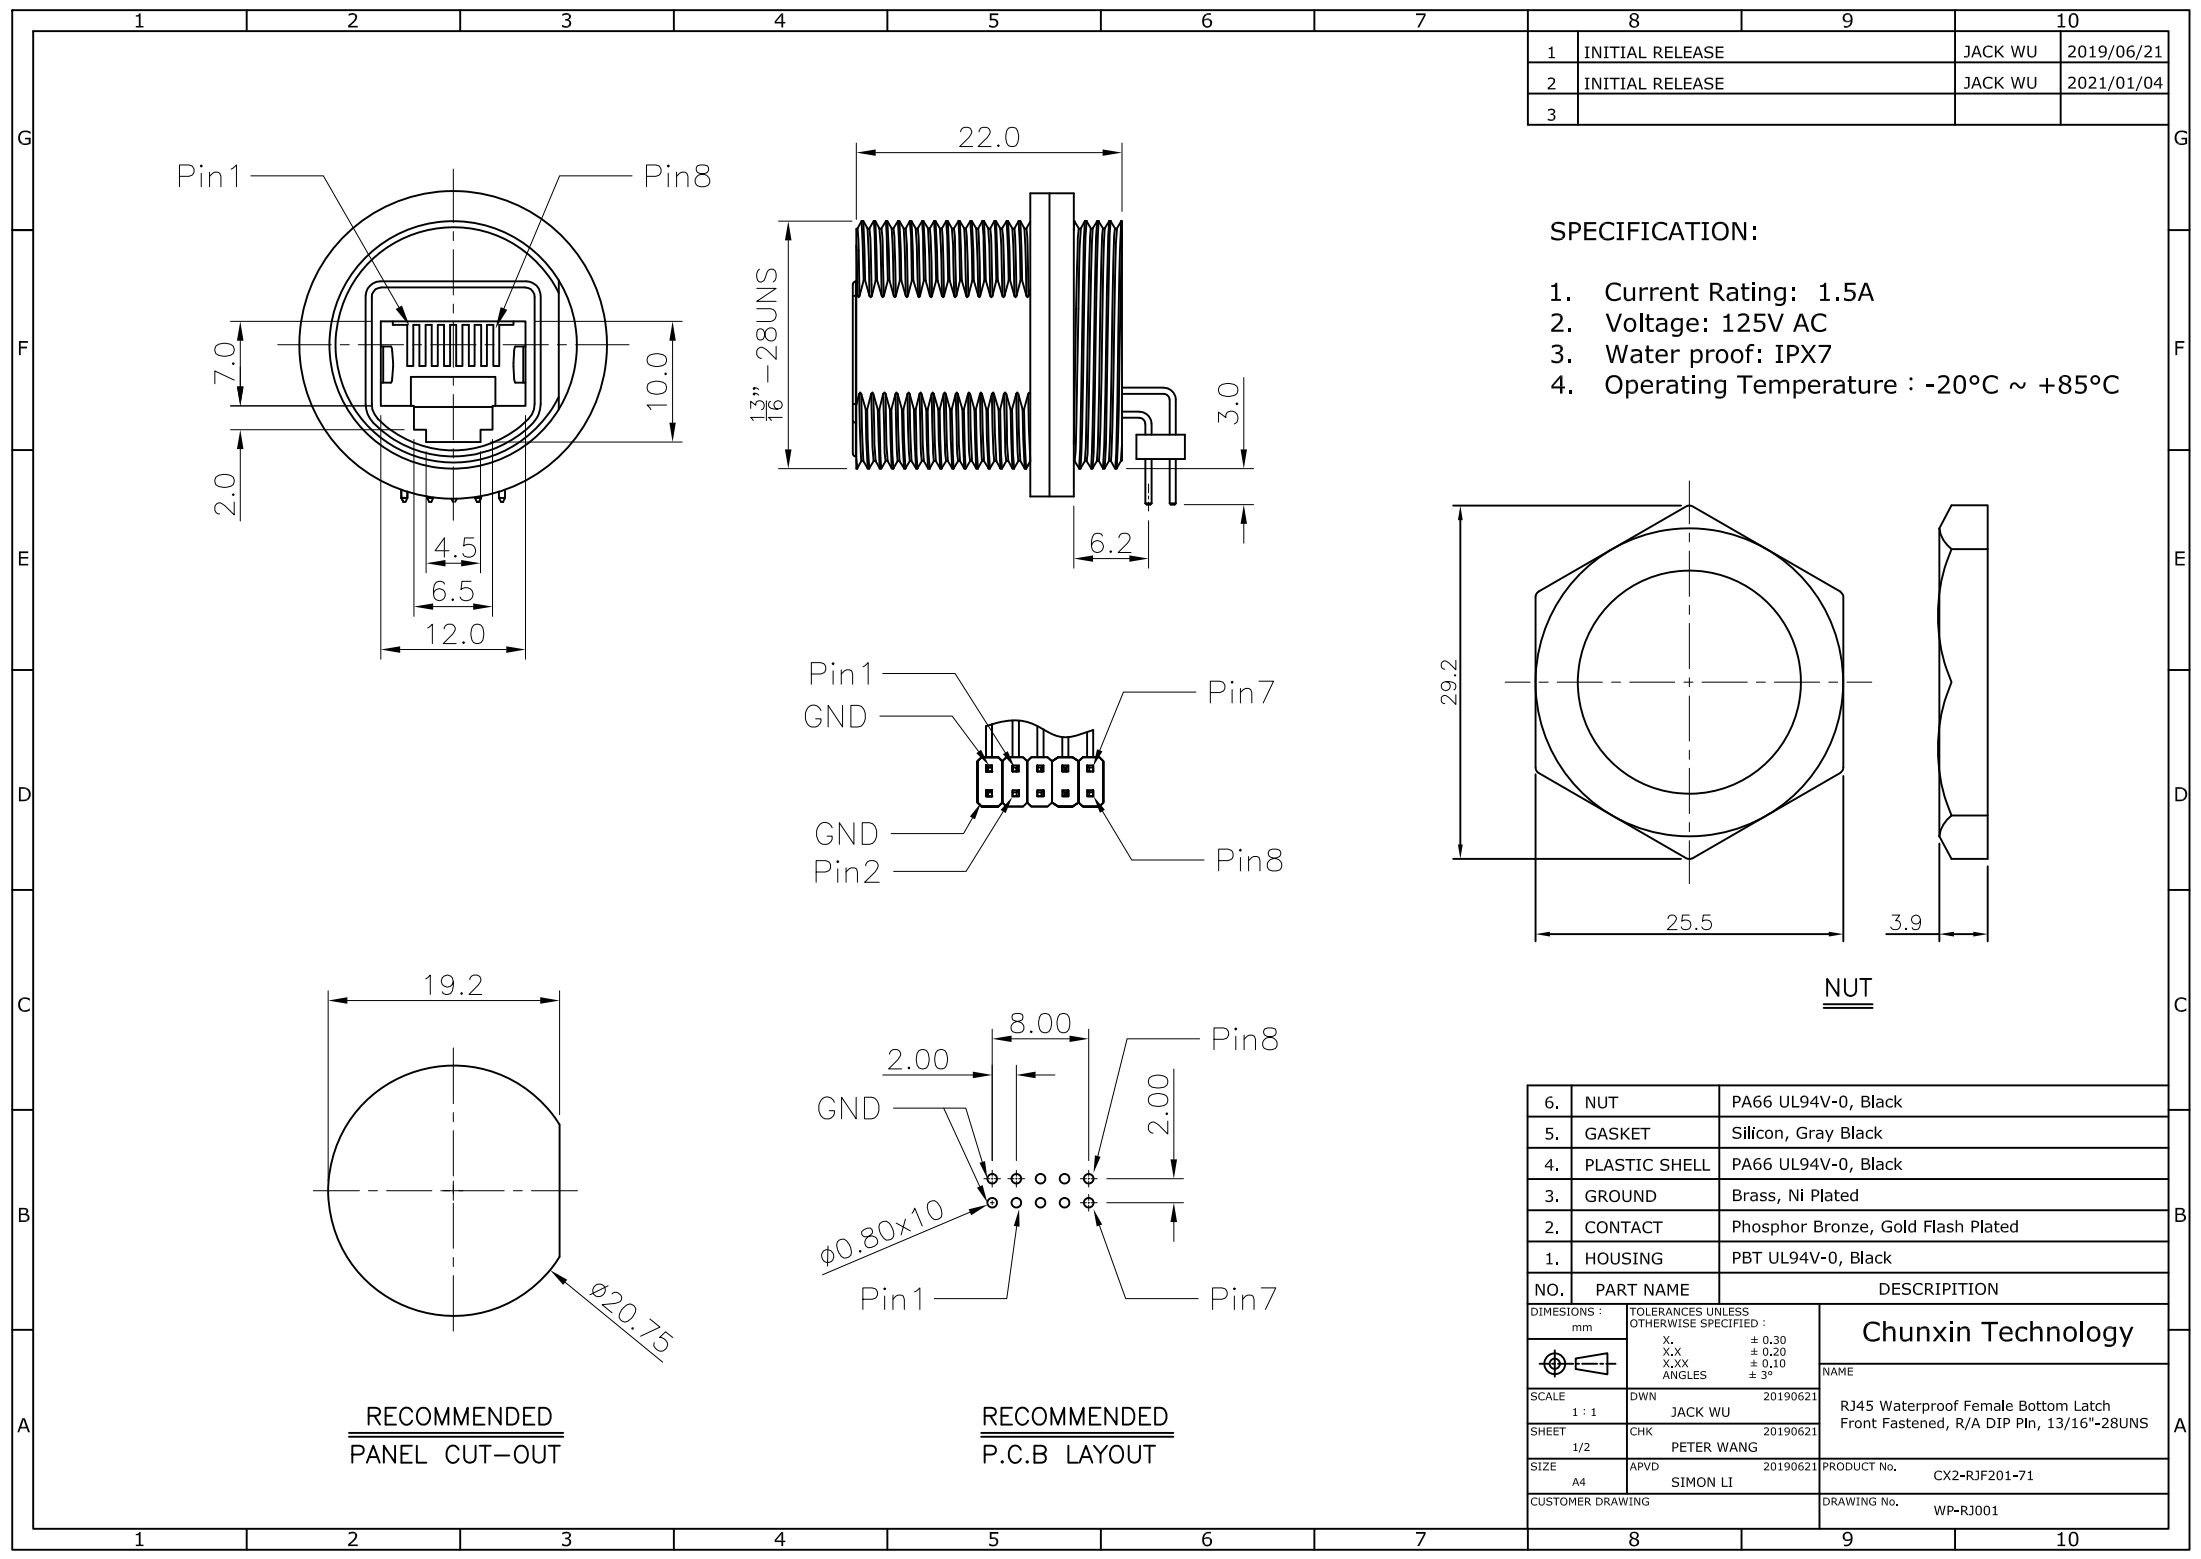

1	INITIAL RELEASE	JACK WU	2019/06/21
2	INITIAL RELEASE	JACK WU	2021/01/04
3			

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage: 125V AC
3. Water proof: IPX7
4. Operating Temperature : -20°C ~ +85°C

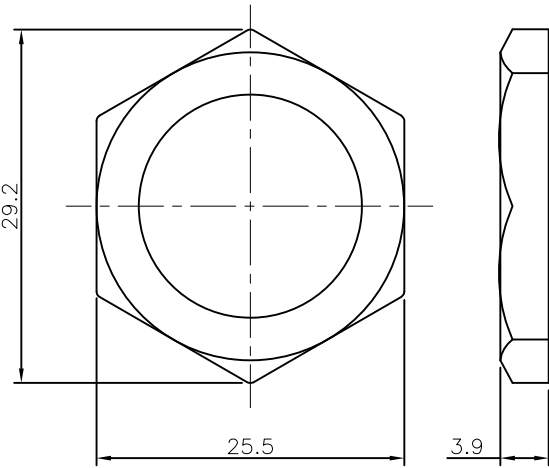

NUT

6.	NUT	PA66 UL94V-0, Black
5.	GASKET	Silicon, Gray Black
4.	PLASTIC SHELL	PA66 UL94V-0, Black
3.	GROUND	Brass, Ni Plated
2.	CONTACT	Phosphor Bronze, Gold Flash Plated
1.	HOUSING	PBT UL94V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		
TOLERANCES UNLESS OTHERWISE SPECIFIED :		
X. ± 0.30		
X.X ± 0.20		
X.XX ± 0.10		
ANGLES ± 3°		
SCALE 1 : 1 DWN JACK WU 20190621		
SHEET 1/2 CHK PETER WANG 20190621		
SIZE A4 APVD SIMON LI 20190621		
CUSTOMER DRAWING		
NAME Chunxin Technology		
RJ45 Waterproof Female Bottom Latch Front Fastened, R/A DIP Pin, 13/16"-28UNS		
PRODUCT No. CX2-RJF201-71		
DRAWING No. WP-RJ001		

