
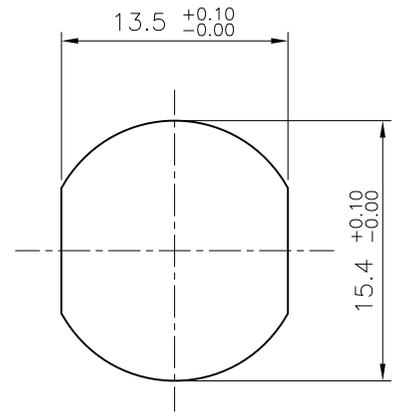
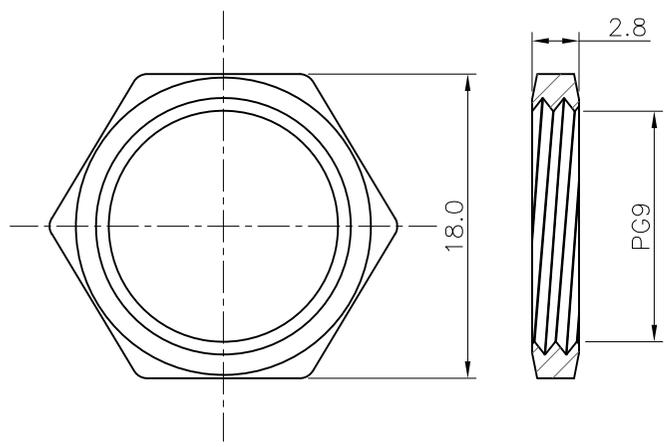
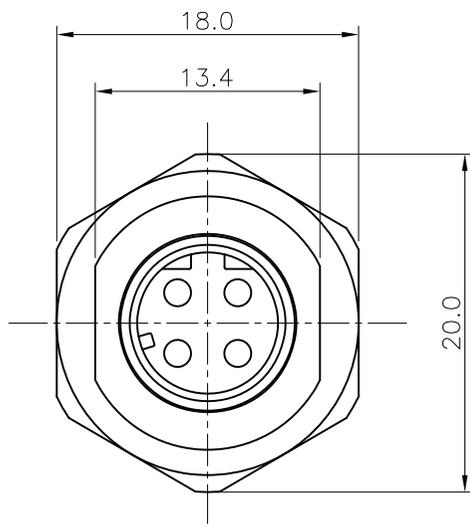


1	INITIAL RELEASE	JACK WU	2010/03/04
2	NEW FORM	JACK WU	2020/12/02
3			

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Water proof: IPX7
4. Operation Temperature: -20°C TO 85°C

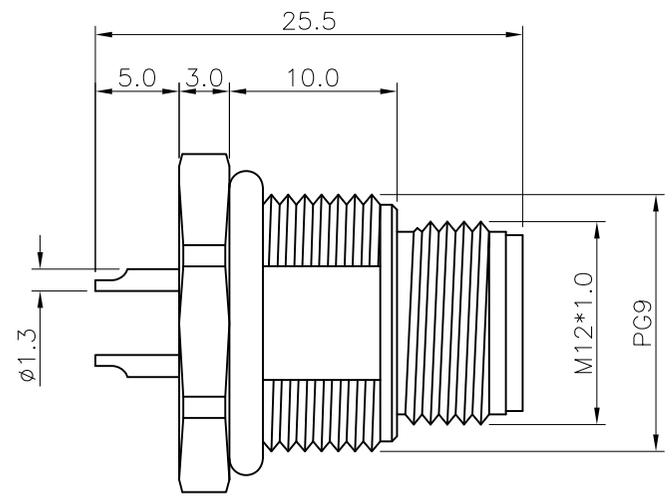

NUT

RECOMMEND
PANEL CUT-OUT

5.	NUT	Brass, Nickel Plated
4.	O-RING	EPDM, Black
3.	SHELL	Brass, Nickel Plated
2.	CONTACT	Brass, 10u" Gold Plated over Nickel
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE 1 : 1	DWN JACK WU 20100304	Chunxin Technology NAME M12 D Code Panel Type 4 Pin Plug Front Fastened Straight Solder Pin PG9
SHEET 1/1	CHK PETER WANG 20100304	
SIZE A4	APVD SIMON LI 20100304	PRODUCT No. CX2-12MD304-71
CUSTOMER DRAWING		DRAWING No. WP-M12S08