
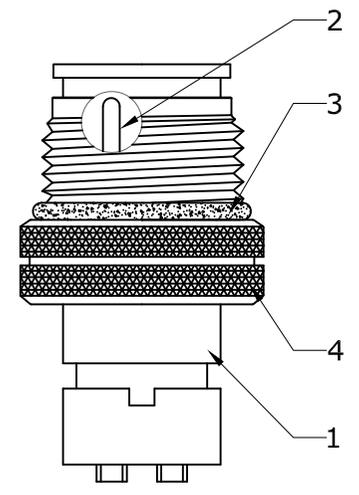
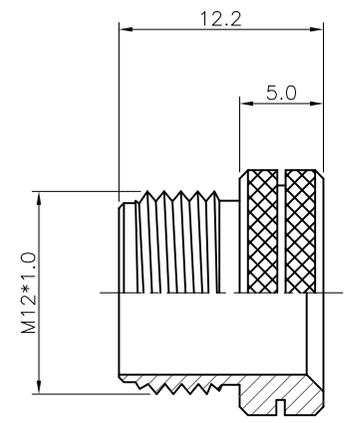
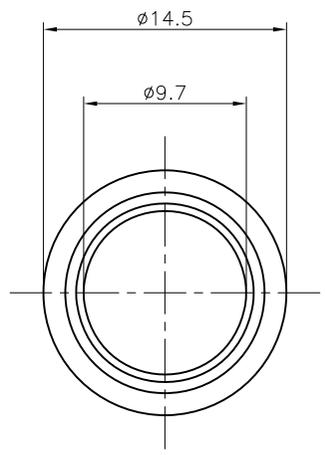
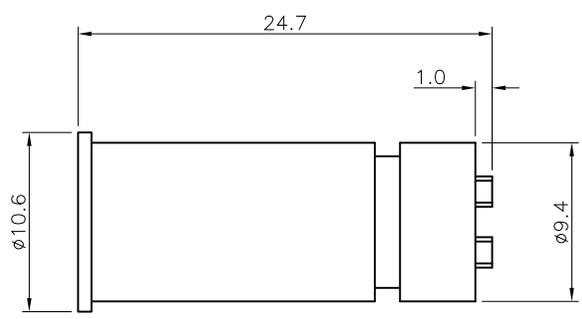


1	INITIAL RELEASE	JACK WU	2009/05/05
2	NEW FORM	JACK WU	2020/11/30
3			

**SPECIFICATION:**

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Water proof: IPX7
4. Operation Temperature: -20°C TO 85°C



**ASSEMBLY**

4.	NUT	Brass, Nickel Plated
3.	O-RING	EPDM, Black
2.	CONTACT	Brass, 10u" Gold Plated over Nickel
1.	HOUSING	PBT UL94 V-0, Black

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm TOLERANCES UNLESS OTHERWISE SPECIFIED : X.                   ± 0.30 X.X                  ± 0.20 X.XX               ± 0.10 ANGLES           ± 3°		
SCALE 1 : 1 SHEET 1/1 SIZE A4 CUSTOMER DRAWING		<b>Chunxin Technology</b> NAME M12 D Code Molding Type 4 Pin Plug, Straight Solder Pin PRODUCT No. CX2-12MD104-71 DRAWING No. WP-M12P06