


1	INITIAL RELEASE	JACK WU	2017/02/17
2	NEW FORM	JACK WU	2020/12/13
3			

SPECIFICATION:

- Current Rating: 10A
- Voltage Rating: 60V
- Water proof: IPX7
- Operation Temperature: -40°C TO 85°C





RECOMMEND PCB LAYOUT


5.	NUT	Brass, Nickel Plated
4.	O-RING	EPDM
3.	SHELL	Brass, Nickel Plated
2.	CONTACT	Brass, Gold Plated over Nickel
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE	DWN	20170217
1 : 1	JACK WU	20170217
SHEET	CHK	20170217
1/1	PETER WANG	20170217
SIZE	APVD	20170217
A4	SIMON LI	20170217
CUSTOMER DRAWING		PRODUCT No. CX2-12FL405-71
		DRAWING No. WP-M12S11

Chunxin Technology

M12 L Code Panel Type, 5Pin Socket
Front Fastend Straight DIP Pin, PG9

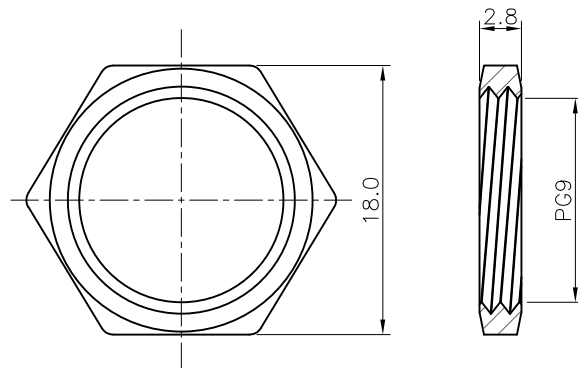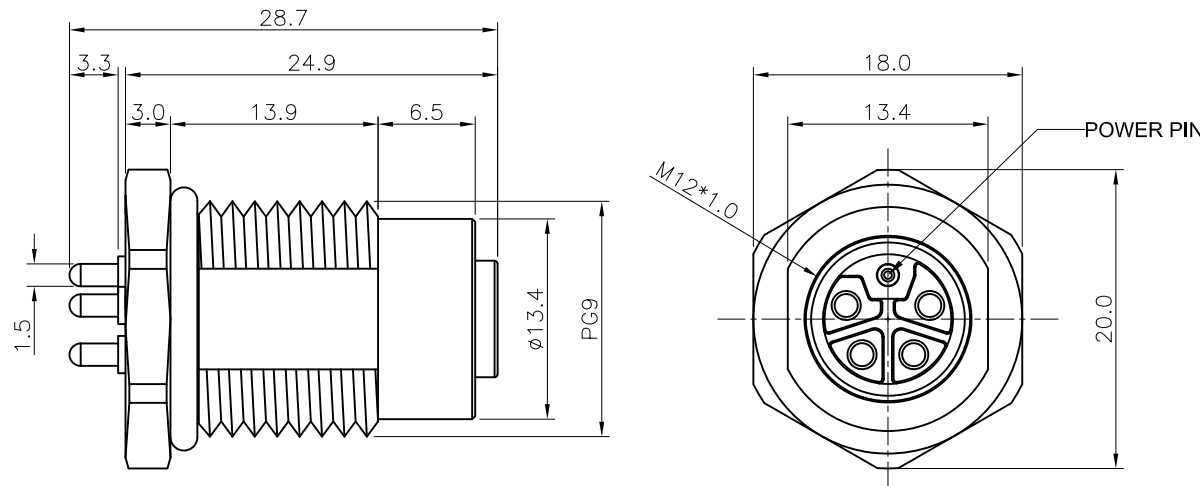

NUT

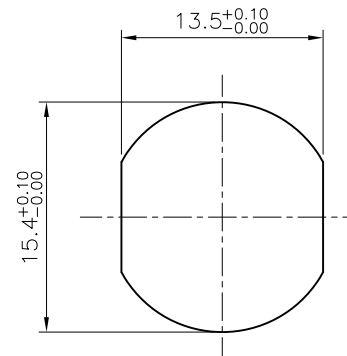

RECOMMEND
PANEL CUT-OUT