

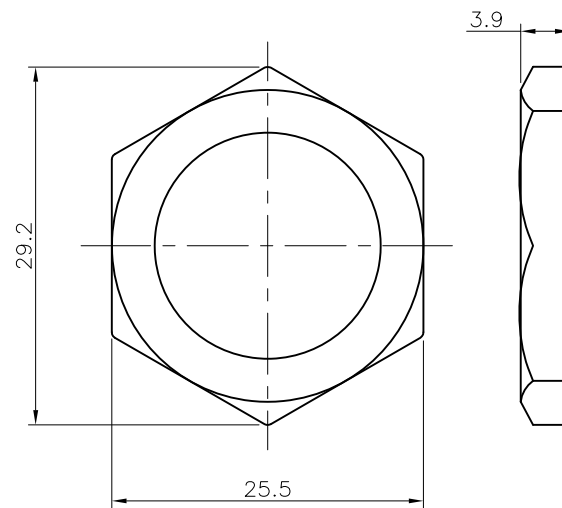
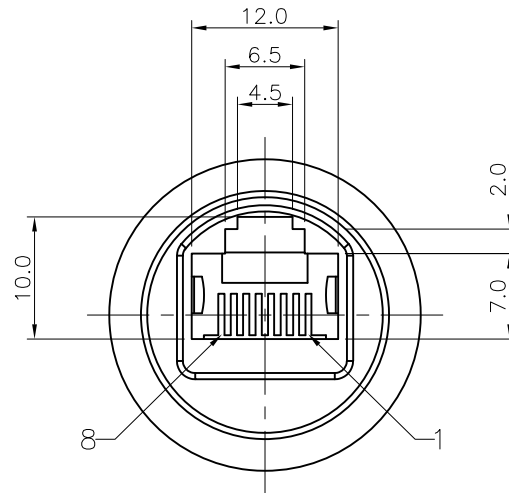


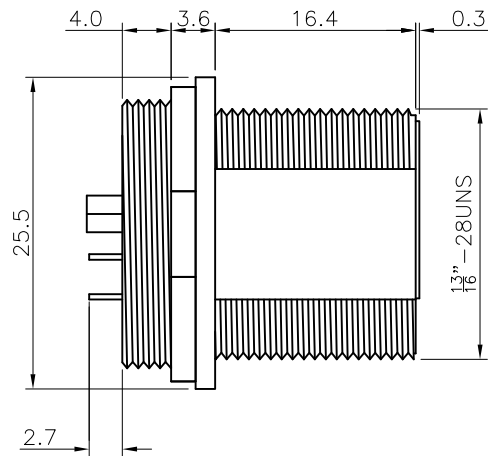


NUT

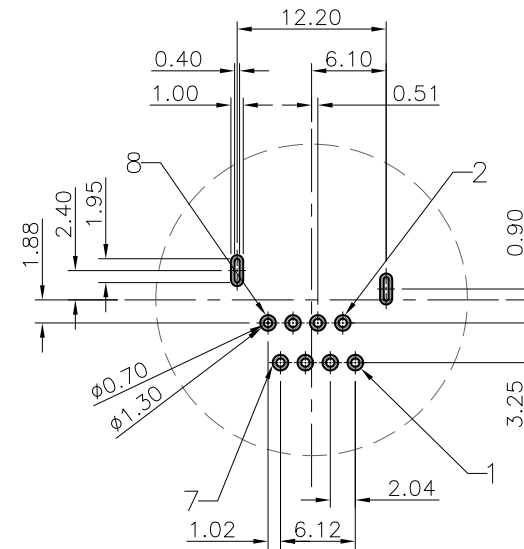

RECOMMENDED
P.C.B LAYOUT

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage: 125V AC
3. Water proof: IPX7
4. Operating Temperature : -40°C ~ +85°C




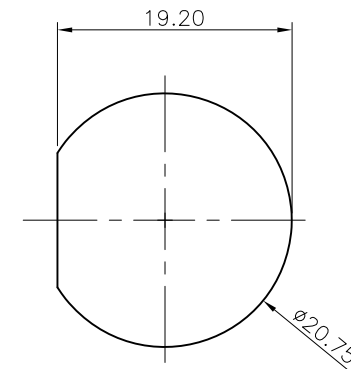


RECOMMENDED
PANEL CUT-OUT

6.	NUT	PA66 UL94-0, Black
5.	GASKET	Silicon, Gray black
4.	PLASTIC SHELL	PA66 UL94-0, Black
3.	GROUND	SUS, Ni Plated
2.	CONTACT	Phosphor, Gold Flash Plated
1.	HOUSING	PBT UL94V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X. ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE 1 : 1		DWN JACK WU 20190419
SHEET 1/2		CHK PETER WANG 20190419
SIZE A4		APVD SIMON LI 20190419
CUSTOMER DRAWING		PRODUCT No. CX2-RJF401-71
		DRAWING No. WP-RJ002


Chunxin Technology

NAME
RJ45 Waterproof Female Upper Latch
Front Fastened, Stralght, DIP Pin,13/16"-28UNS

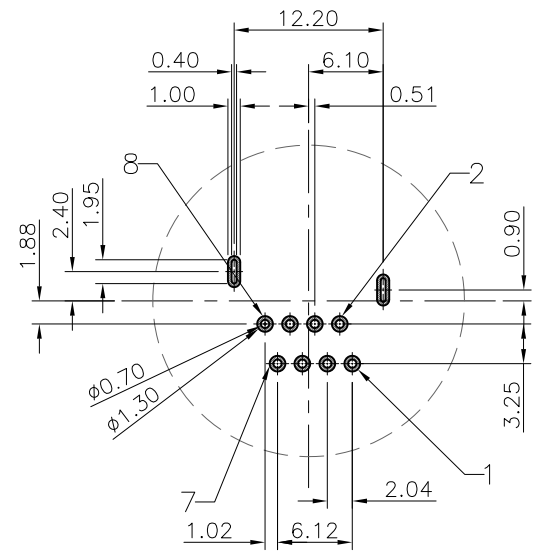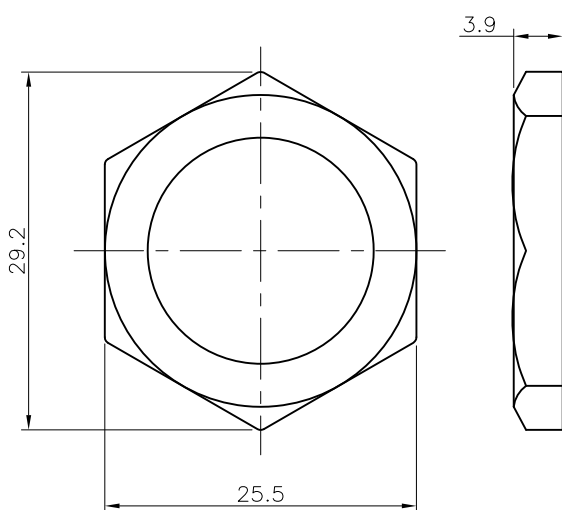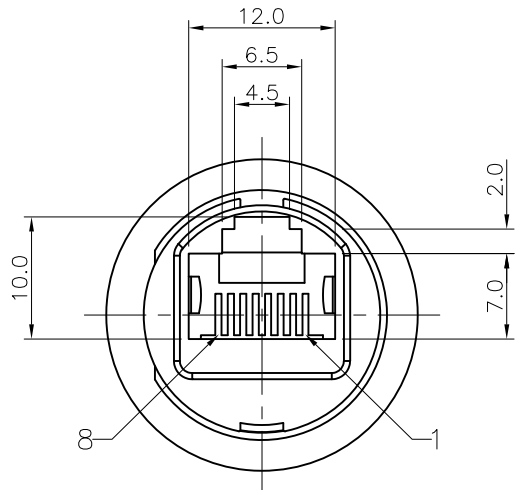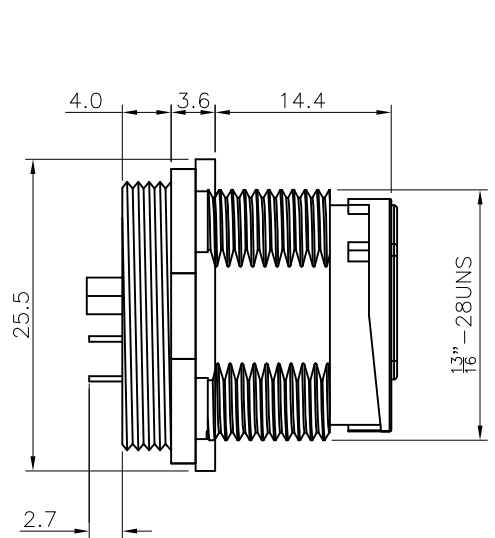

SPECIFICATION:

- 1. Current Rating: 1.5A
- 2. Voltage: 125V AC
- 3. Water proof: IPX7
- 4. Operating Temperature : -40°C ~ +85°C

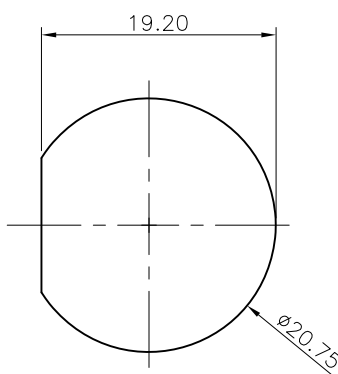

RECOMMENDED
PANEL CUT-OUT

6.	NUT	PA66 UL94-0, Black
5.	GASKET	Silicon, Gray black
4.	PLASTIC SHELL	PA66 UL94-0, Black
3.	GROUND	SUS, Ni Plated
2.	CONTACT	Phosphor, Gold Flash Plated
1.	HOUSING	PBT UL94V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		
TOLERANCES UNLESS OTHERWISE SPECIFIED :		
X. ± 0.30		
X.X ± 0.20		
X.XX ± 0.10		
ANGLES ± 3°		
SCALE 1 : 1 DWN JACK WU 20190419		
SHEET 1/2 CHK PETER WANG 20190419		
SIZE A4 APVD SIMON LI 20190419		
CUSTOMER DRAWING		
NAME Chunxin Technology		
RJ45 Waterproof Female Upper Latch Front Fastened, Straight Quick Lock, DIP Pin, 13/16"-28UNS		
PRODUCT No. CX2-RJF401-72		
DRAWING No. WP-RJ002		