
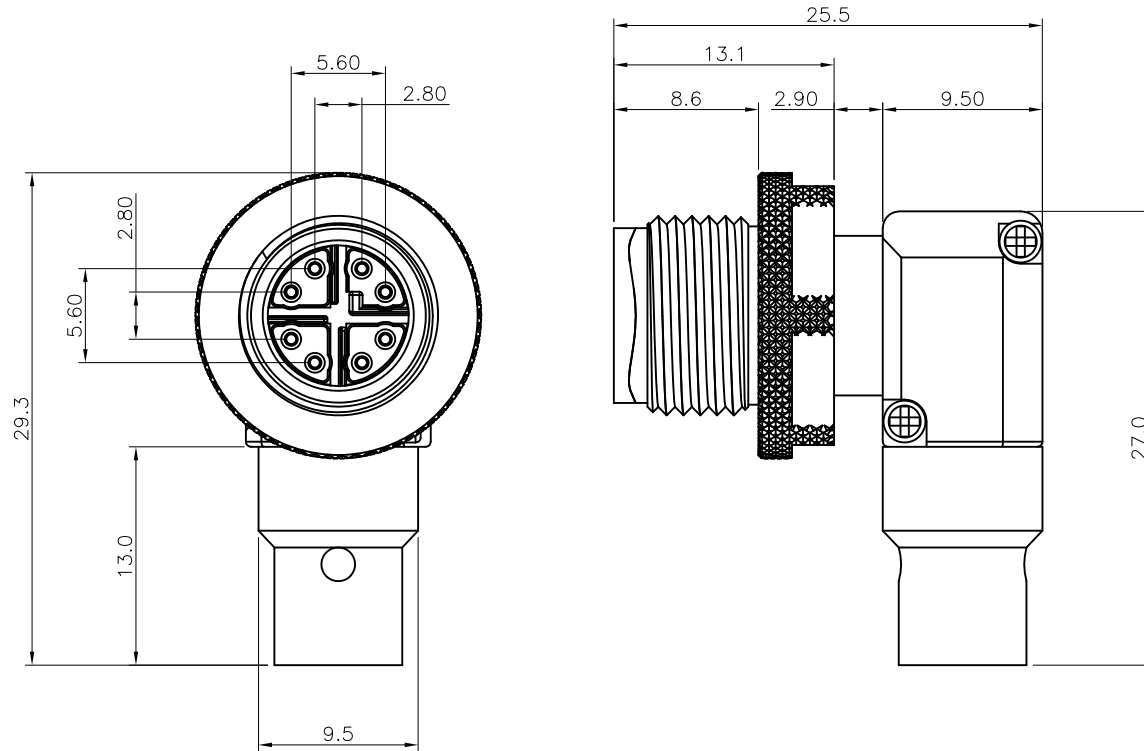


1	8	9	10
1	INITIAL RELEASE	JACK WU	2017/11/15
2	NEW FORM	JACK WU	2020/12/21
3			


SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 48V
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

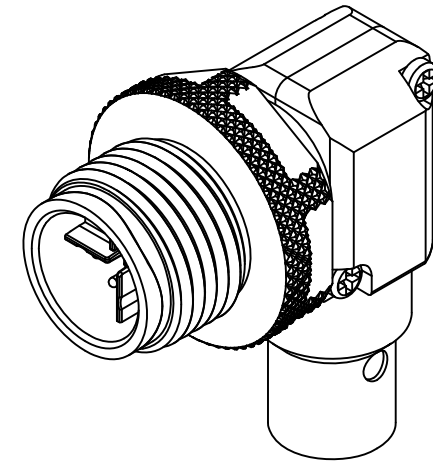

ASSEMBLY

NO.	PART NAME	DESCRIPTION
DIMENSIONS :	TOLERANCES UNLESS OTHERWISE SPECIFIED :	Chunxin Technology
mm	X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	
SCALE	DWN	NAME
1 : 1	JACK WU	M12 X Code Molding Type 8 Pin, Plug R/A Solder Pin
SHEET	CHK	20171115
1/3	PETER WANG	
SIZE	APVD	20171115
A4	SIMON LI	PRODUCT No. CX2-12MX108-72
CUSTOMER DRAWING		DRAWING No. WP-M12P11

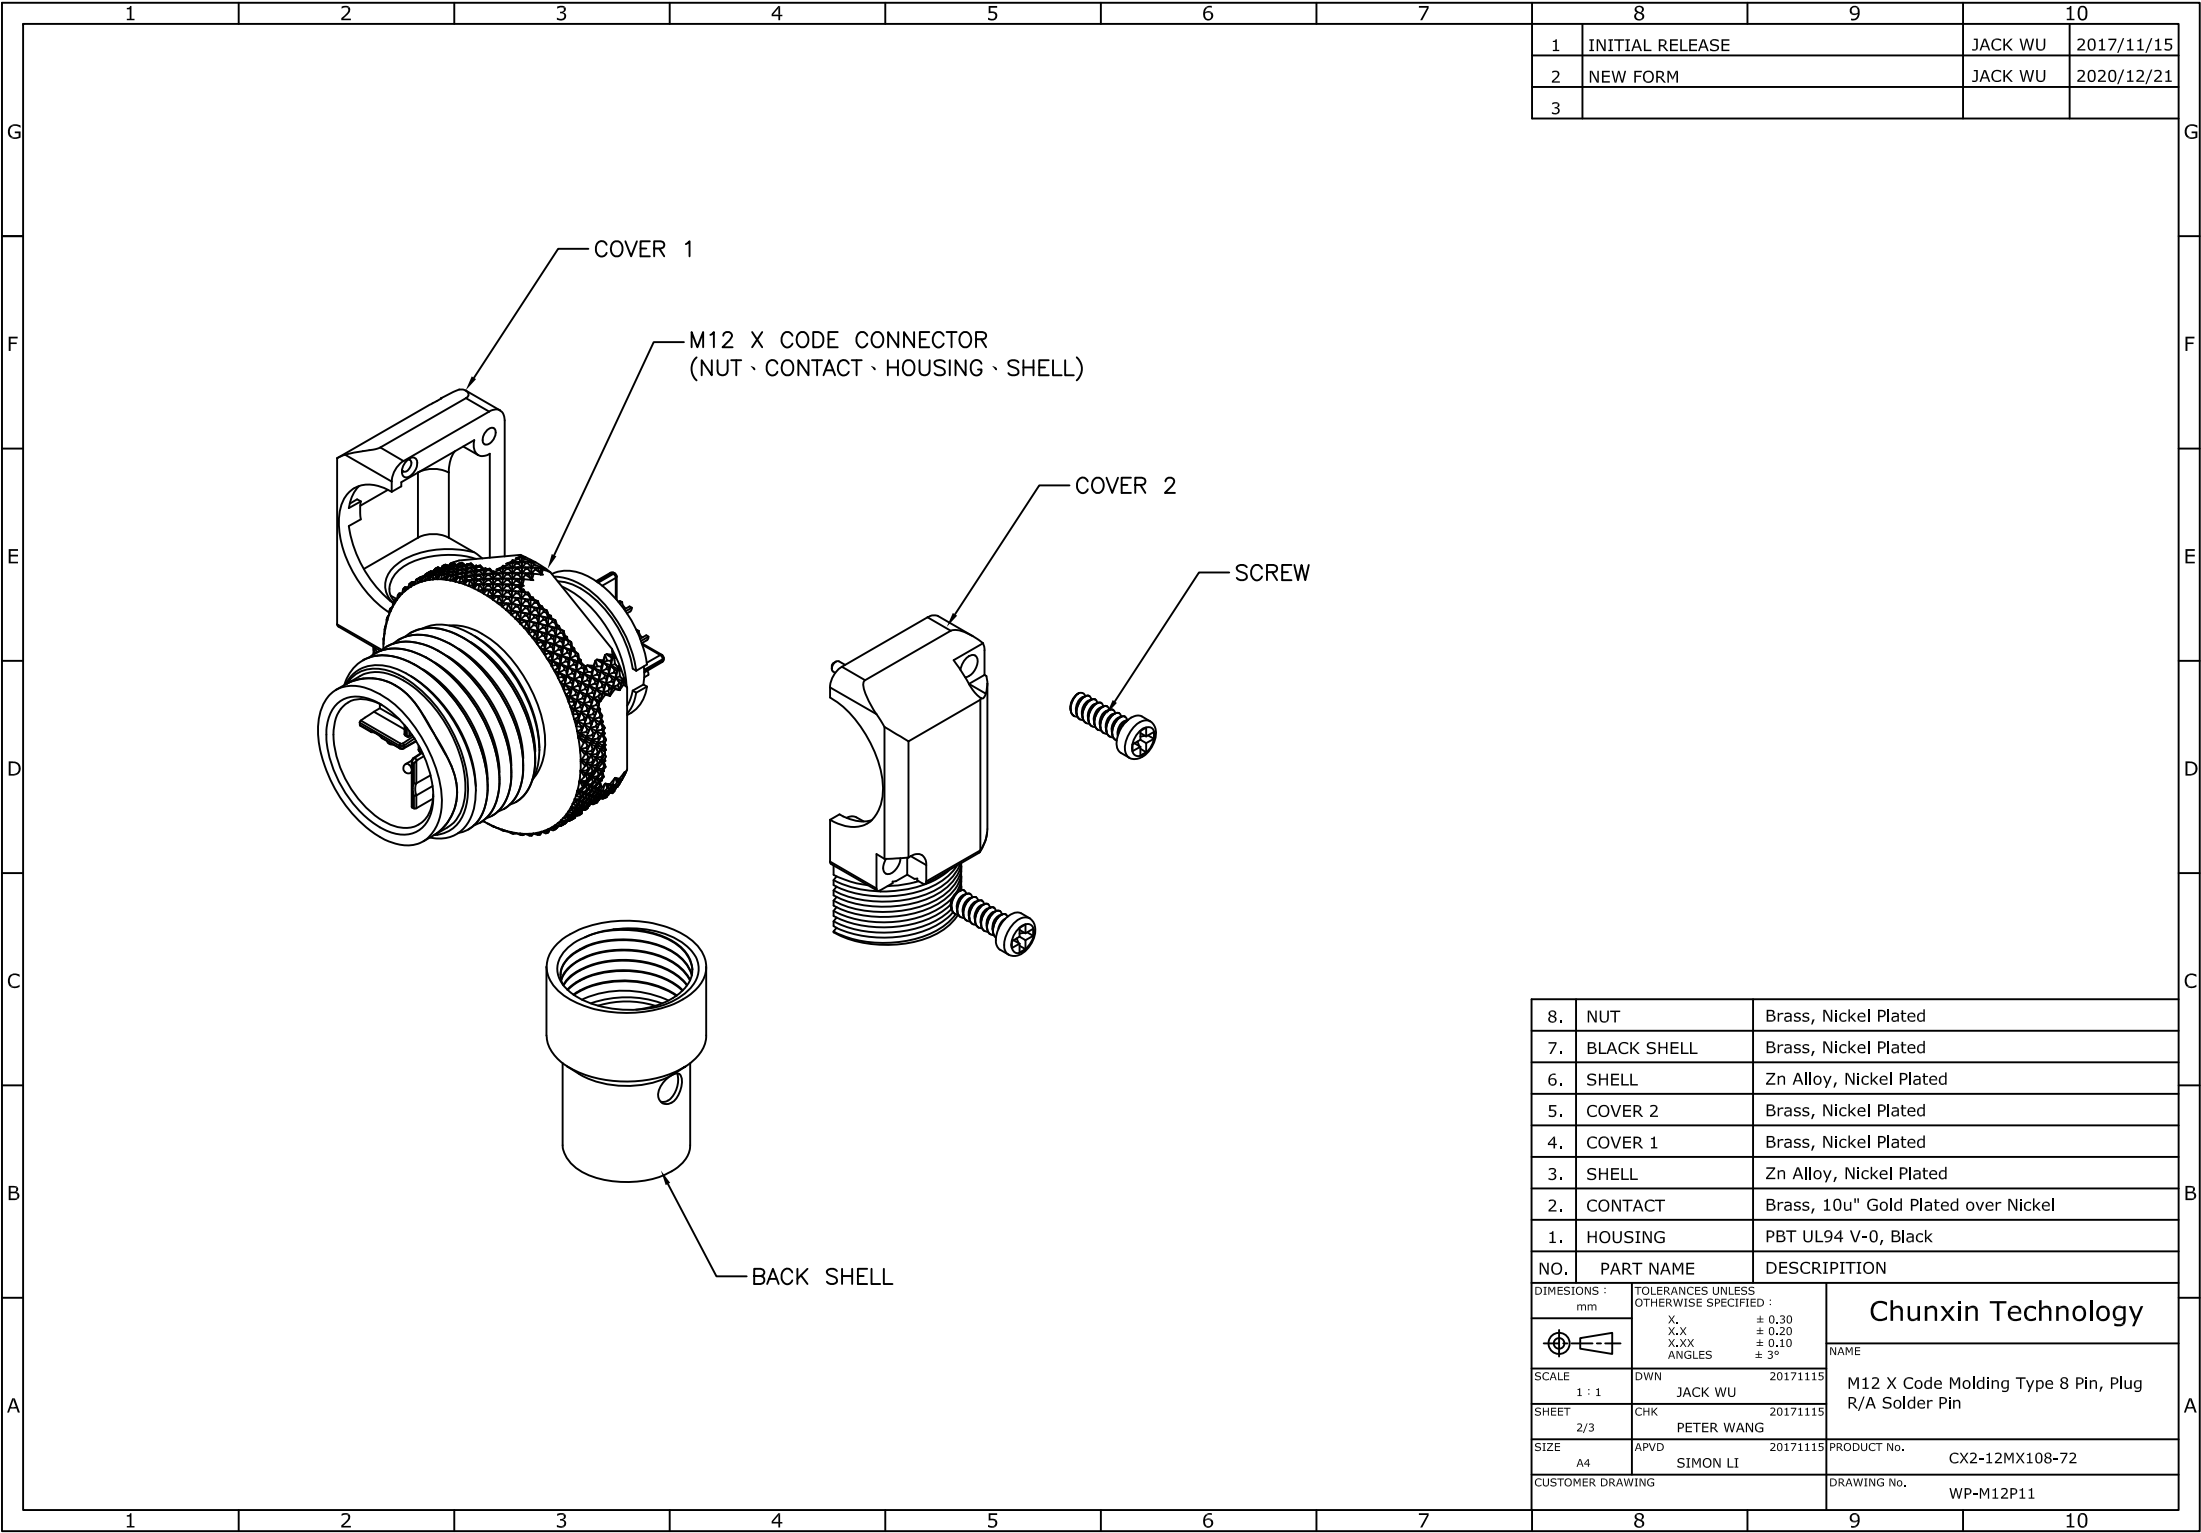

1	INITIAL RELEASE	JACK WU	2017/11/15
2	NEW FORM	JACK WU	2020/12/21
3			

8.	NUT	Brass, Nickel Plated
7.	BLACK SHELL	Brass, Nickel Plated
6.	SHELL	Zn Alloy, Nickel Plated
5.	COVER 2	Brass, Nickel Plated
4.	COVER 1	Brass, Nickel Plated
3.	SHELL	Zn Alloy, Nickel Plated
2.	CONTACT	Brass, 10u" Gold Plated over Nickel
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMESTONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°
SCALE 1 : 1		DWN JACK WU 20171115
SHEET 2/3		CHK PETER WANG 20171115
SIZE A4		APVD SIMON LI 20171115
CUSTOMER DRAWING		PRODUCT No. CX2-12MX108-72
		DRAWING No. WP-M12P11

Chunxin Technology

M12 X Code Molding Type 8 Pin, Plug
R/A Solder Pin

