


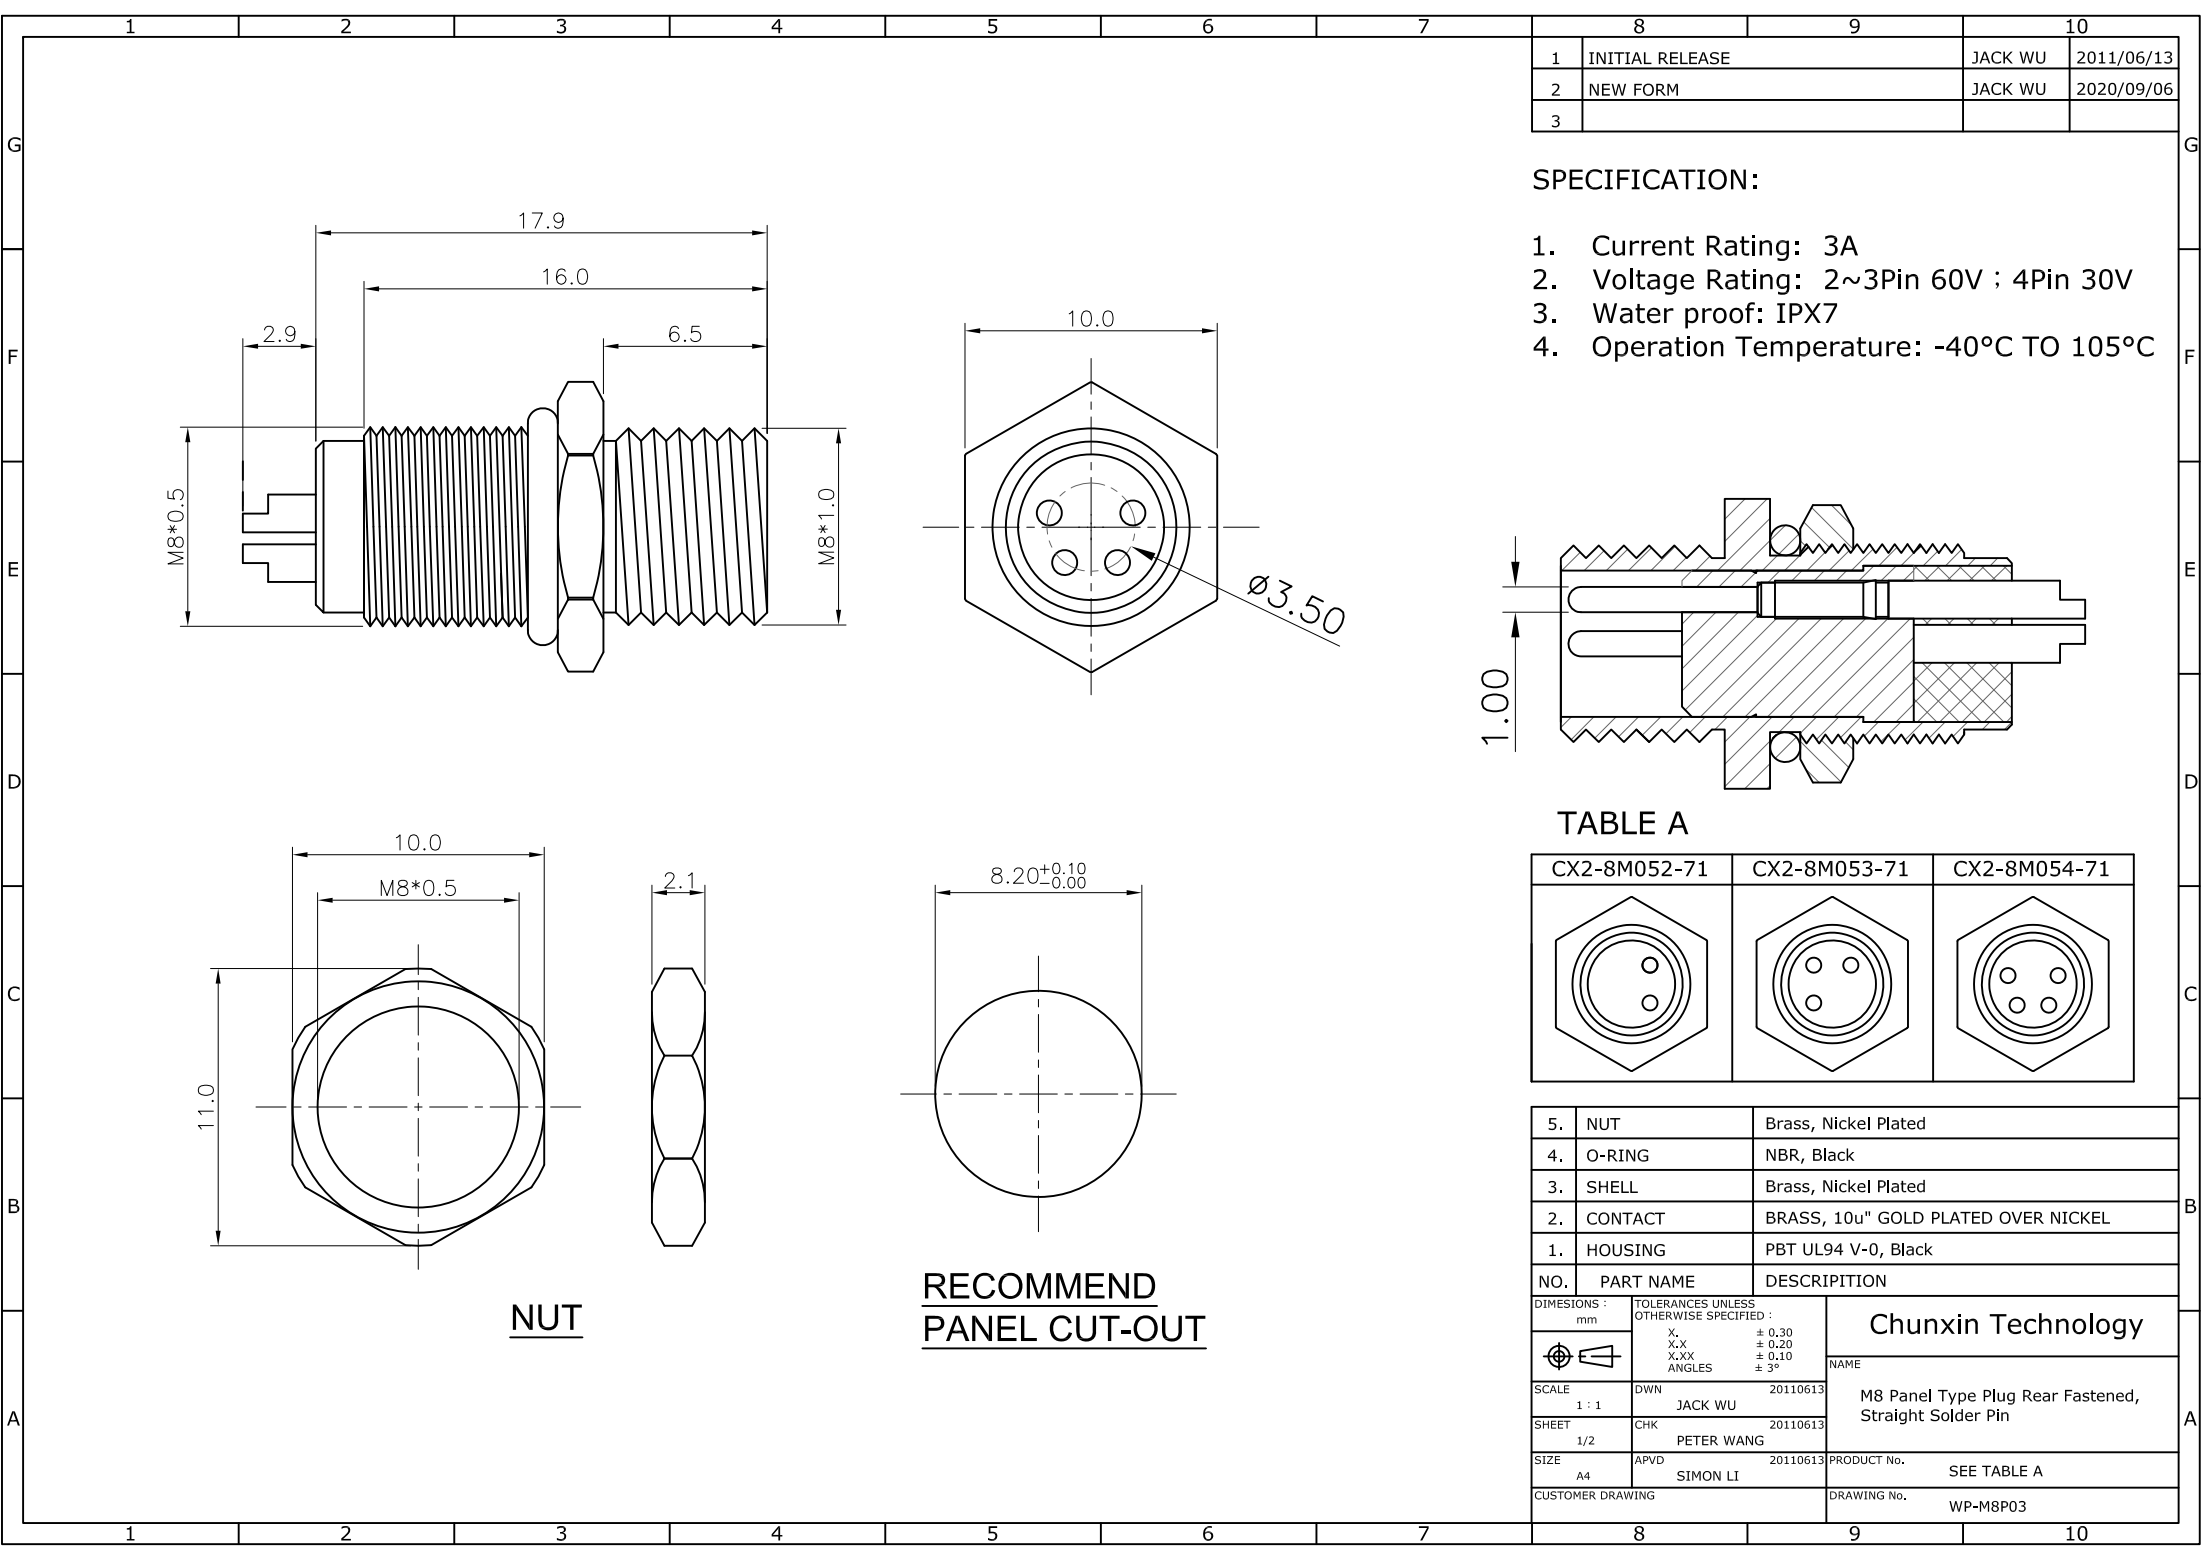

1	INITIAL RELEASE	JACK WU	2011/06/13
2	NEW FORM	JACK WU	2020/09/06
3			

SPECIFICATION:

- 1. Current Rating: 3A
- 2. Voltage Rating: 2~3Pin 60V ; 4Pin 30V
- 3. Water proof: IPX7
- 4. Operation Temperature: -40°C TO 105°C

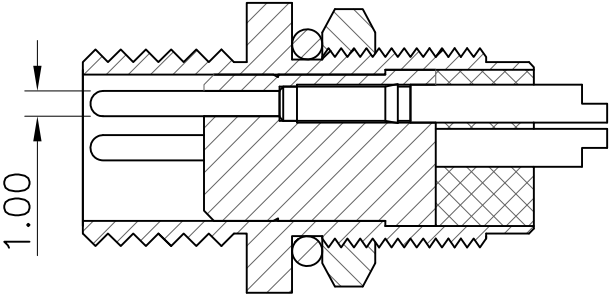


TABLE A

CX2-8M052-71	CX2-8M053-71	CX2-8M054-71

5.	NUT	Brass, Nickel Plated
4.	O-RING	NBR, Black
3.	SHELL	Brass, Nickel Plated
2.	CONTACT	BRASS, 10u" GOLD PLATED OVER NICKEL
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30
		X.X, ± 0.20
		X.XX, ± 0.10
		ANGLES, ± 3°
SCALE	1 : 1	DWN JACK WU 20110613
SHEET	1/2	CHK PETER WANG 20110613
SIZE	A4	APVD SIMON LI 20110613
CUSTOMER DRAWING		PRODUCT No. SEE TABLE A
		DRAWING No. WP-M8P03

Chunxin Technology

M8 Panel Type Plug Rear Fastened, Straight Solder Pin

1	INITIAL RELEASE	JACK WU	2011/06/13
2	NEW FORM	JACK WU	2020/09/06
3			

SPECIFICATION:

- Current Rating: 3A
- Voltage Rating: 30V
- Water proof: IPX7
- Operation Temperature: -40°C TO 105°C

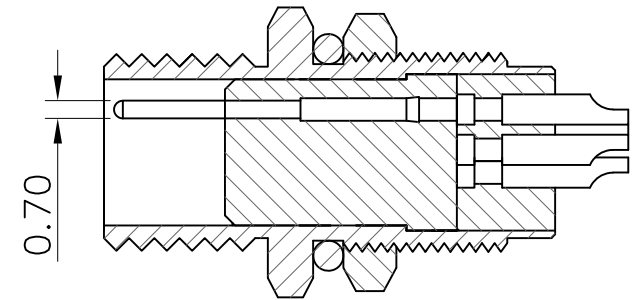



TABLE B

CX2-8M055-71	CX2-8M056-71


5.	NUT	Brass, Nickel Plated
4.	O-RING	NBR, Black
3.	SHELL	Brass, Nickel Plated
2.	CONTACT	BRASS, 10u" GOLD PLATED OVER NICKEL
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMESTONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X, ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES ± 3°
SCALE	1 : 1	DWN JACK WU 20130807
SHEET	2/2	CHK PETER WANG 20130807
SIZE	A4	APVD SIMON LI 20130807
CUSTOMER DRAWING		PRODUCT No. SEE TABLE B
		DRAWING No. WP-M8P03

Chunxin Technology

M8 Panel Type Plug Rear Fastened,
Straight Solder Pin

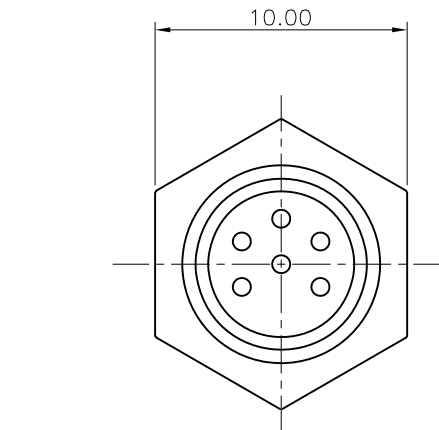

RECOMMEND
PANEL CUT-OUT



NUT

