


1	INITIAL RELEASE	JACK WU	2008/12/22
2	NEW FORM	JACK WU	2020/12/13
3			

**SPECIFICATION:**



1. Current Rating: 4A
2. Voltage Rating: 250V
3. Water proof: IPX7
4. Operation Temperature: -40°C TO 85°C

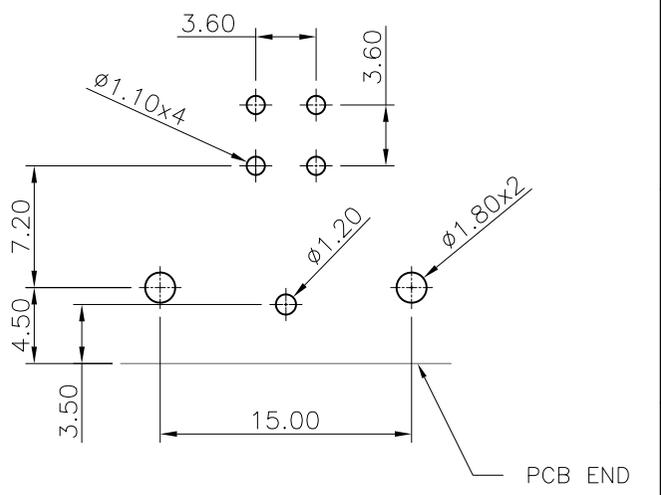

**RECOMMEND P.B.C LAYOUT**

6.	NUT	Brass, Nickel Plated
5.	O-RING	EPDM, Black
4.	CONTACT	Brass, Gold Plated over Nickel
3.	DOWN HOUSING	PBT UL94 V-0, Black
2.	BACK HOUSING	PBT UL94 V-0, Black
1.	HOUSING	PBT UL94 V-0, Black
NO.	PART NAME	DESCRIPTION

DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :		<b>Chunxin Technology</b> NAME	
		X.	± 0.30		
SCALE 1 : 1		X.X	± 0.20		
SHEET 1/1		X.XX	± 0.10		
SIZE A4		ANGLES	± 3°		
CUSTOMER DRAWING		APVD	SIMON LI	20081222	DRAWING No. WP-M12S08

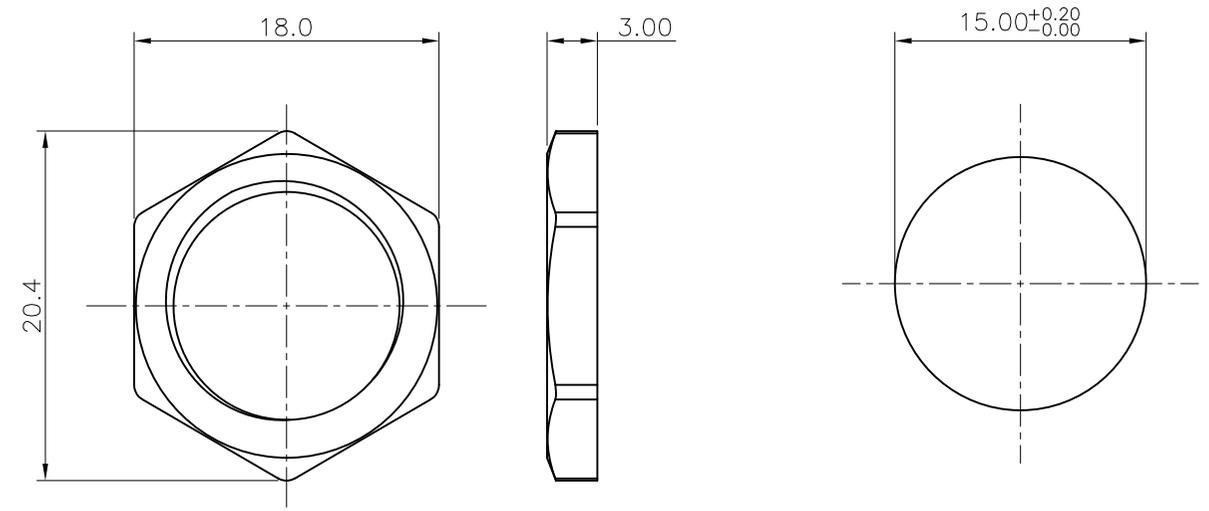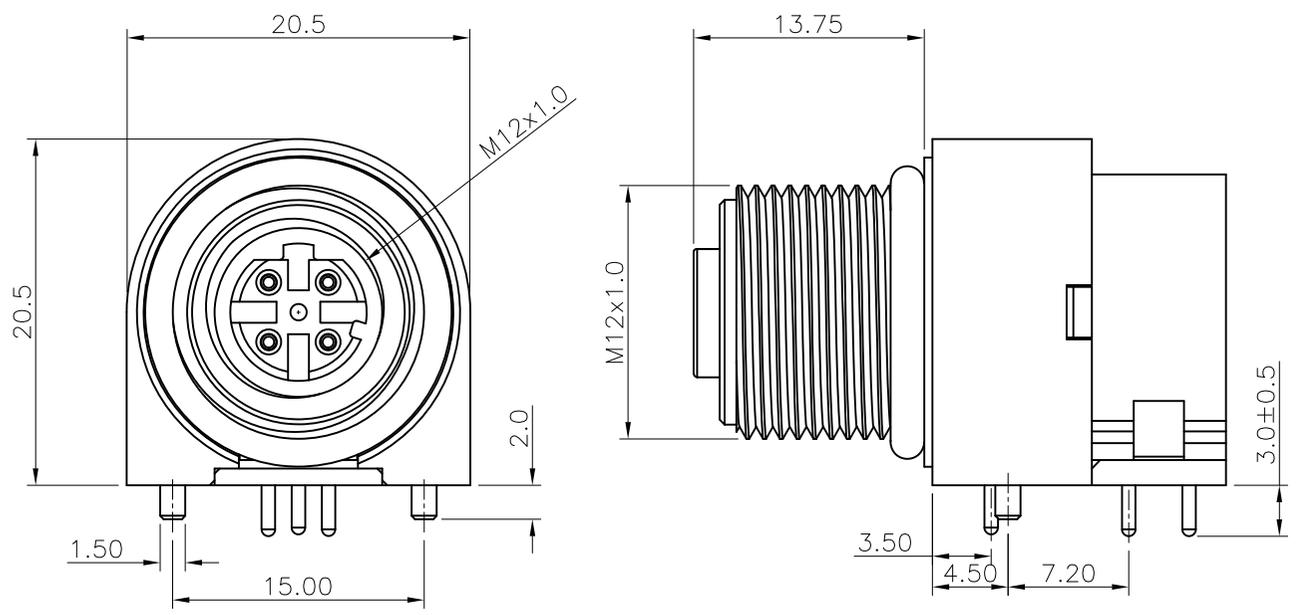

**NUT**

**RECOMMEND PANEL CUT-OUT**