


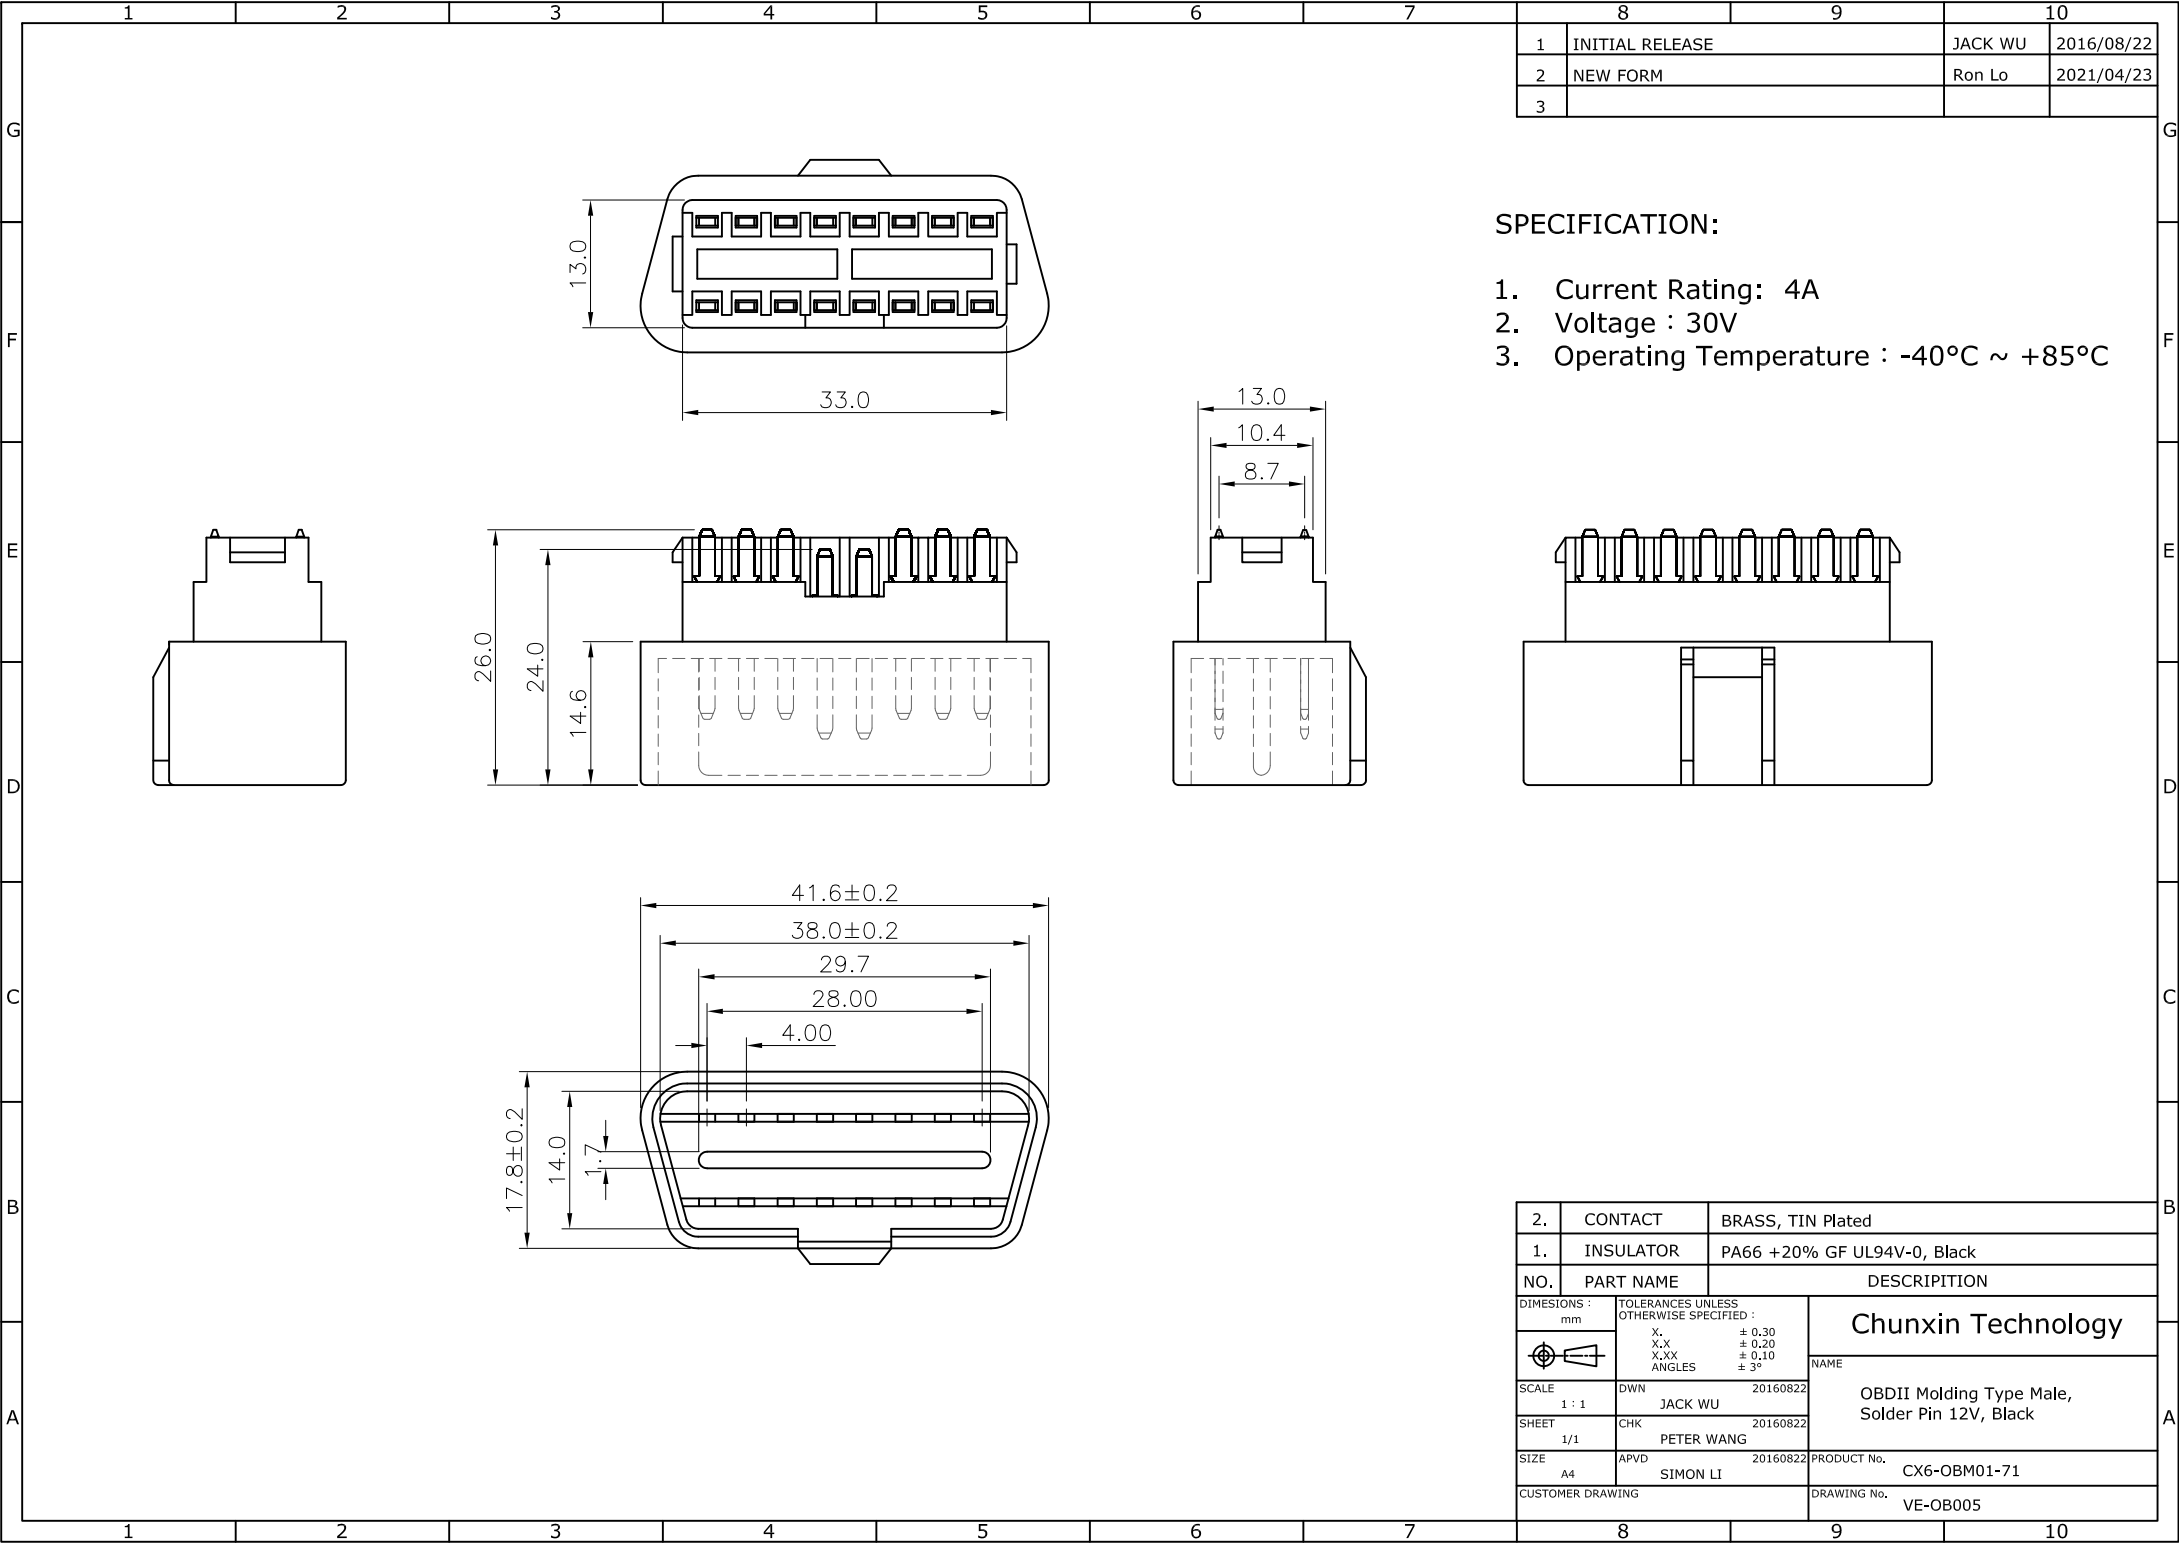

8		9		10	
1	INITIAL RELEASE			JACK WU	2016/08/22
2	NEW FORM			Ron Lo	2021/04/23
3					

SPECIFICATION:

1. Current Rating: 4A
2. Voltage : 30V
3. Operating Temperature : -40°C ~ +85°C

2.	CONTACT	BRASS, TIN Plated	
1.	INSULATOR	PA66 + 20% GF UL94V-0, Black	
NO.	PART NAME	DESCRIPTION	
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :	
		X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	
SCALE 1 : 1		NAME	
SHEET 1/1		OBDII Molding Type Male, Solder Pin 12V, Black	
SIZE A4		PRODUCT No. CX6-OBM01-71	
CUSTOMER DRAWING		DRAWING No. VE-OB005	