
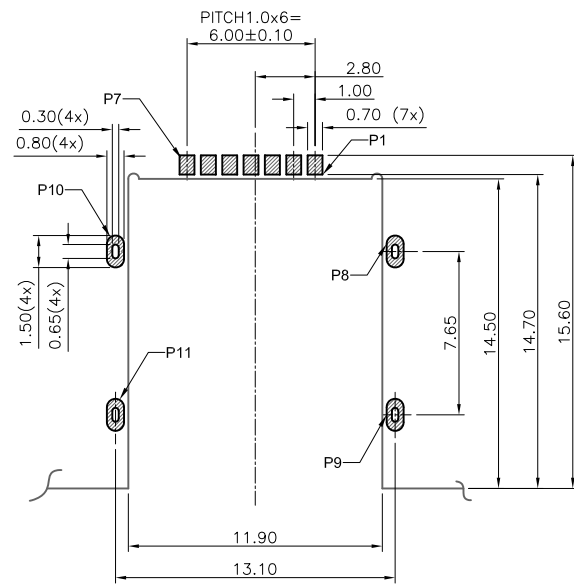
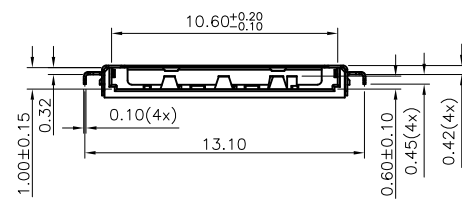




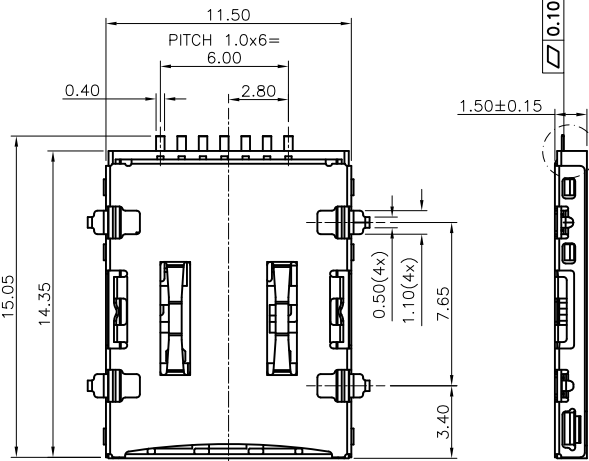


RERECOMMENDED P.C.BOARD LAYOUT

TOLERANCES : ± 0.05

PAD AREA

KEEP OUT AREA

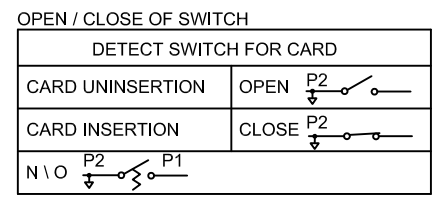







SPECIFICATION:

1. Current Rating: 0.5A
2. Rated Voltage: 30V AC
3. Contact Resistance: 50m Ω Max.
4. Insulator Resistance: 1000M Ω Min.
5. Withstanding Voltage: 500V AC
6. Durability: 3,000 Cycles
7. Operatore Temperature: -40°C~+85°C

CONTACT PIN ASSIGNMENT		
PIN No.	No. FOR CARD	FUNCTION
PIN 1	CD	CARD DETECT
PIN 2	C5	GND
PIN 3	C1	VCC
PIN 4	C6	VPP
PIN 5	C2	RST
PIN 6	C7	I / O
PIN 7	C3	CLK
PIN 8	NONE	GND
PIN 9	NONE	GND
PIN 10	NONE	GND
PIN 11	NONE	GND

3.	SHELL	Stainless Steel, Ni Plated
2.	CONTACT	Copper Alloy , Gold Plating on Contact Area
1.	HOUSING	Hi-Temp Thermoplastic UL94 V-0, Black
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES $\pm 3^{\circ}$	NAME
SCALE 1 : 1	DWN JACK WU 20191030	Chunxin Technology
SHEET 1/4	CHK PETER WANG 20191030	Nano SIM Socket Tray Type 6Pin+Switch, H=1.50mm
SIZE A4	APVD SIMON LI 20191030	PRODUCT No. CX1-NSM6401-41
CUSTOMER DRAWING		DRAWING No. CS-NSIM004


1	INITIAL RELEASE	JACK WU	2019/10/30
2	NEW FORM	JACK WU	2020/05/11
3			

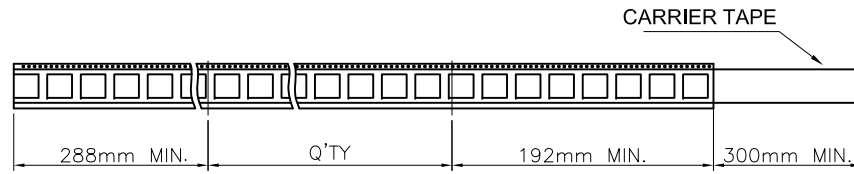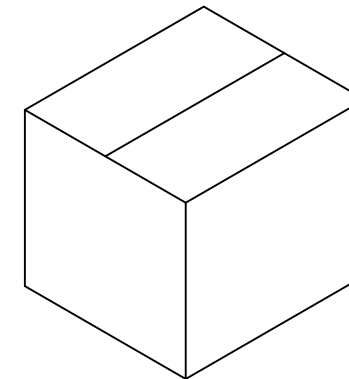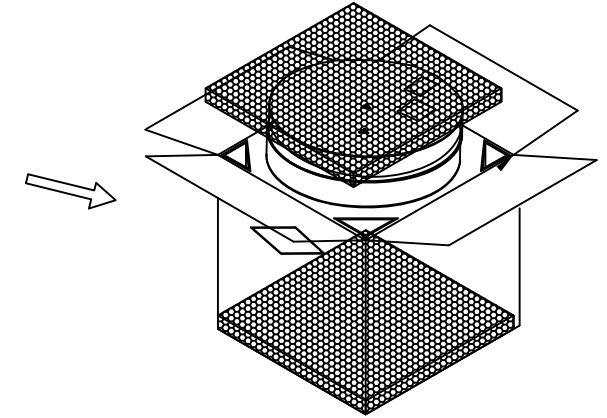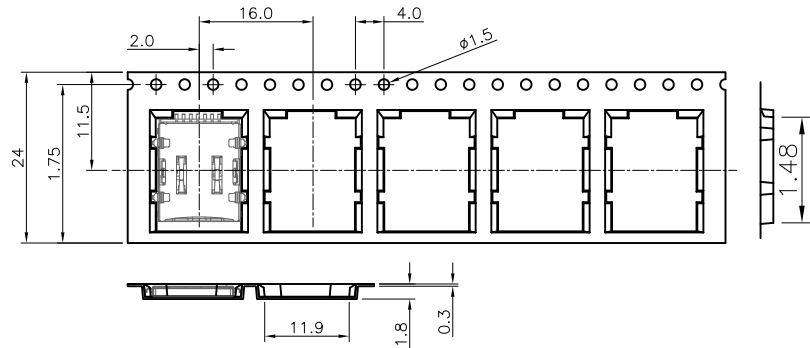

18 EMPTY CARRIER TAPE

12 EMPTY CARRIER TAPE

User Direction of Unreeling


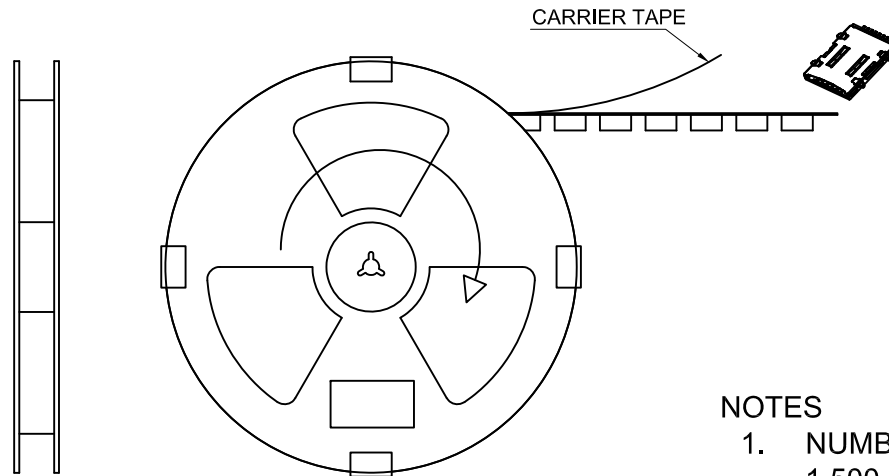


NOTES


1. NUMBER OF CONNECTORS :
1,500 PCS / REEL ;
15,000 PCS / CARTON

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	NAME Chunxin Technology
SCALE 1 : 1	DWN JACK WU	PRODUCT No. CX1-NSM6401-41
SHEET 2/4	CHK PETER WANG	DRAWING No. CS-NSIM004
SIZE A4	APVD SIMON LI	
CUSTOMER DRAWING		


1	INITIAL RELEASE	JACK WU	2019/10/30
2	NEW FORM	JACK WU	2020/05/11
3			

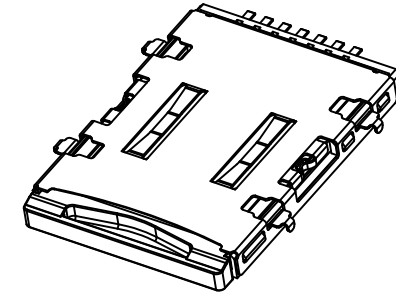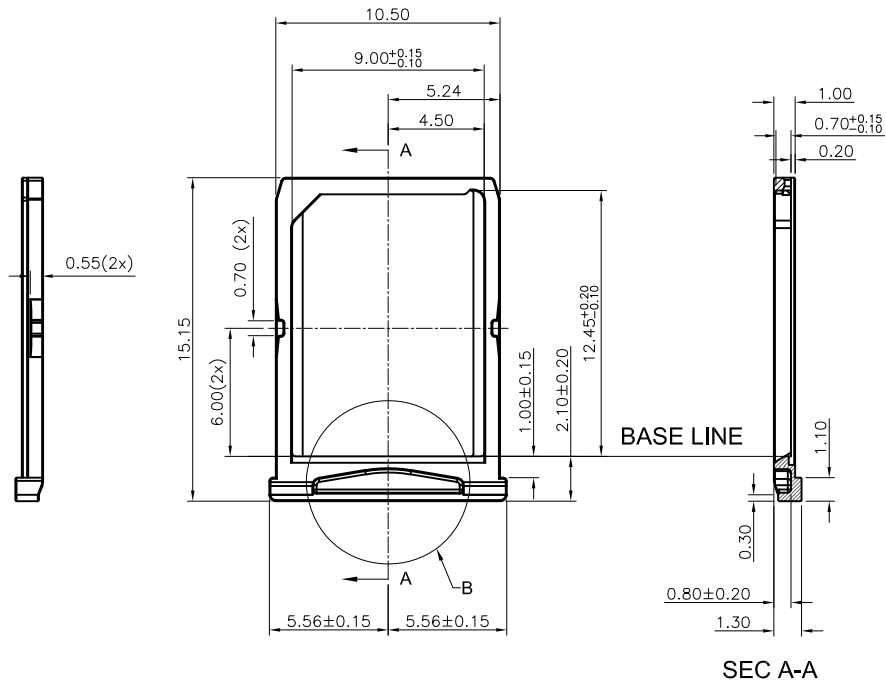

TRAY WITH CONNECTOR

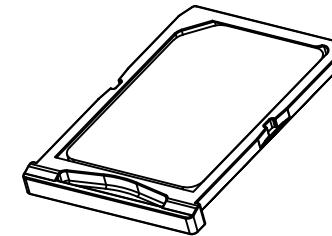


NANO SIM TRAY

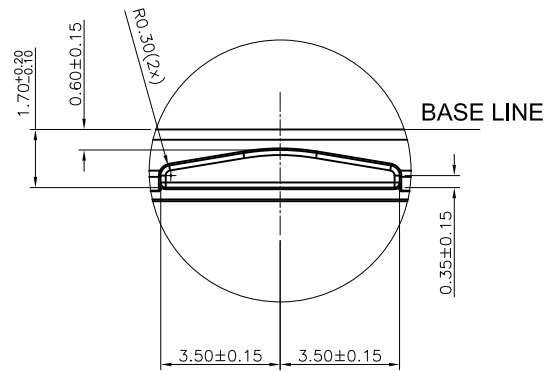


DETAIL B
SCALE : 8 : 1

1.	HOUSING	Hi-Temp Thermoplastic UL94 V-0, Black	
NO.	PART NAME	DESCRIPTION	
DIMESTIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°		Chunxin Technology
	NAME		
SCALE 1 : 1	DWN JACK WU	20191030	Nano SIM Socket Tray
SHEET 3/4	CHK PETER WANG	20191030	
SIZE A4	APVD SIMON LI	20191030	PRODUCT No. CX1-NSM6401T-41
CUSTOMER DRAWING		DRAWING No. CS-NSIM004	



1	INITIAL RELEASE	JACK WU	2019/10/30
2	NEW FORM	JACK WU	2020/05/11
3			

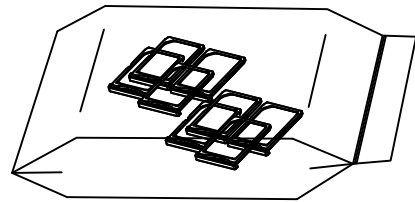

10 PCS / INNER BAG
1,000 PCS / PE BAG

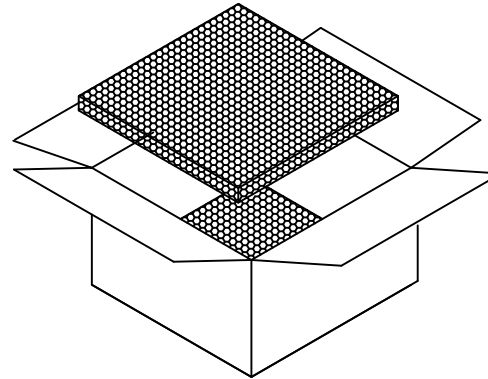

1,500 PCS / CARTON

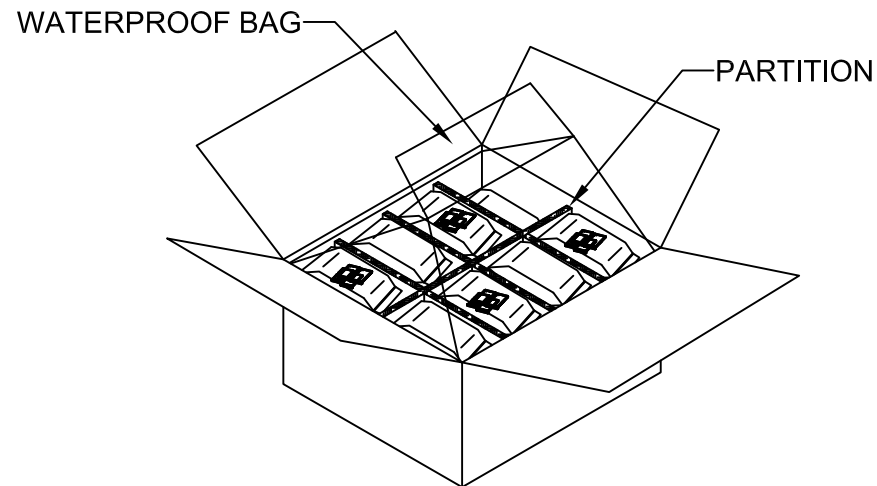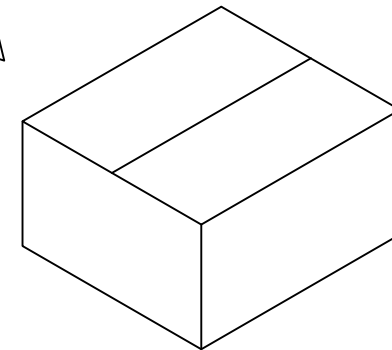

NOTES

- NUMBER OF CONNECTORS :
10 PCS / INNER BAG ;
1,000 PCS / PE BAG ;
15,000 PCS / CARTON

NO.	PART NAME	DESCRIPTION	
DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED :	Chunxin Technology	
	X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°		
SCALE 1 : 1	DWN JACK WU	NAME Nano SIM Socket Tray	
SHEET 4/4	CHK PETER WANG		
SIZE A4	APVD SIMON LI	PRODUCT No.	CX1-NSM6401T-41
CUSTOMER DRAWING		DRAWING No.	CS-NSIM004