



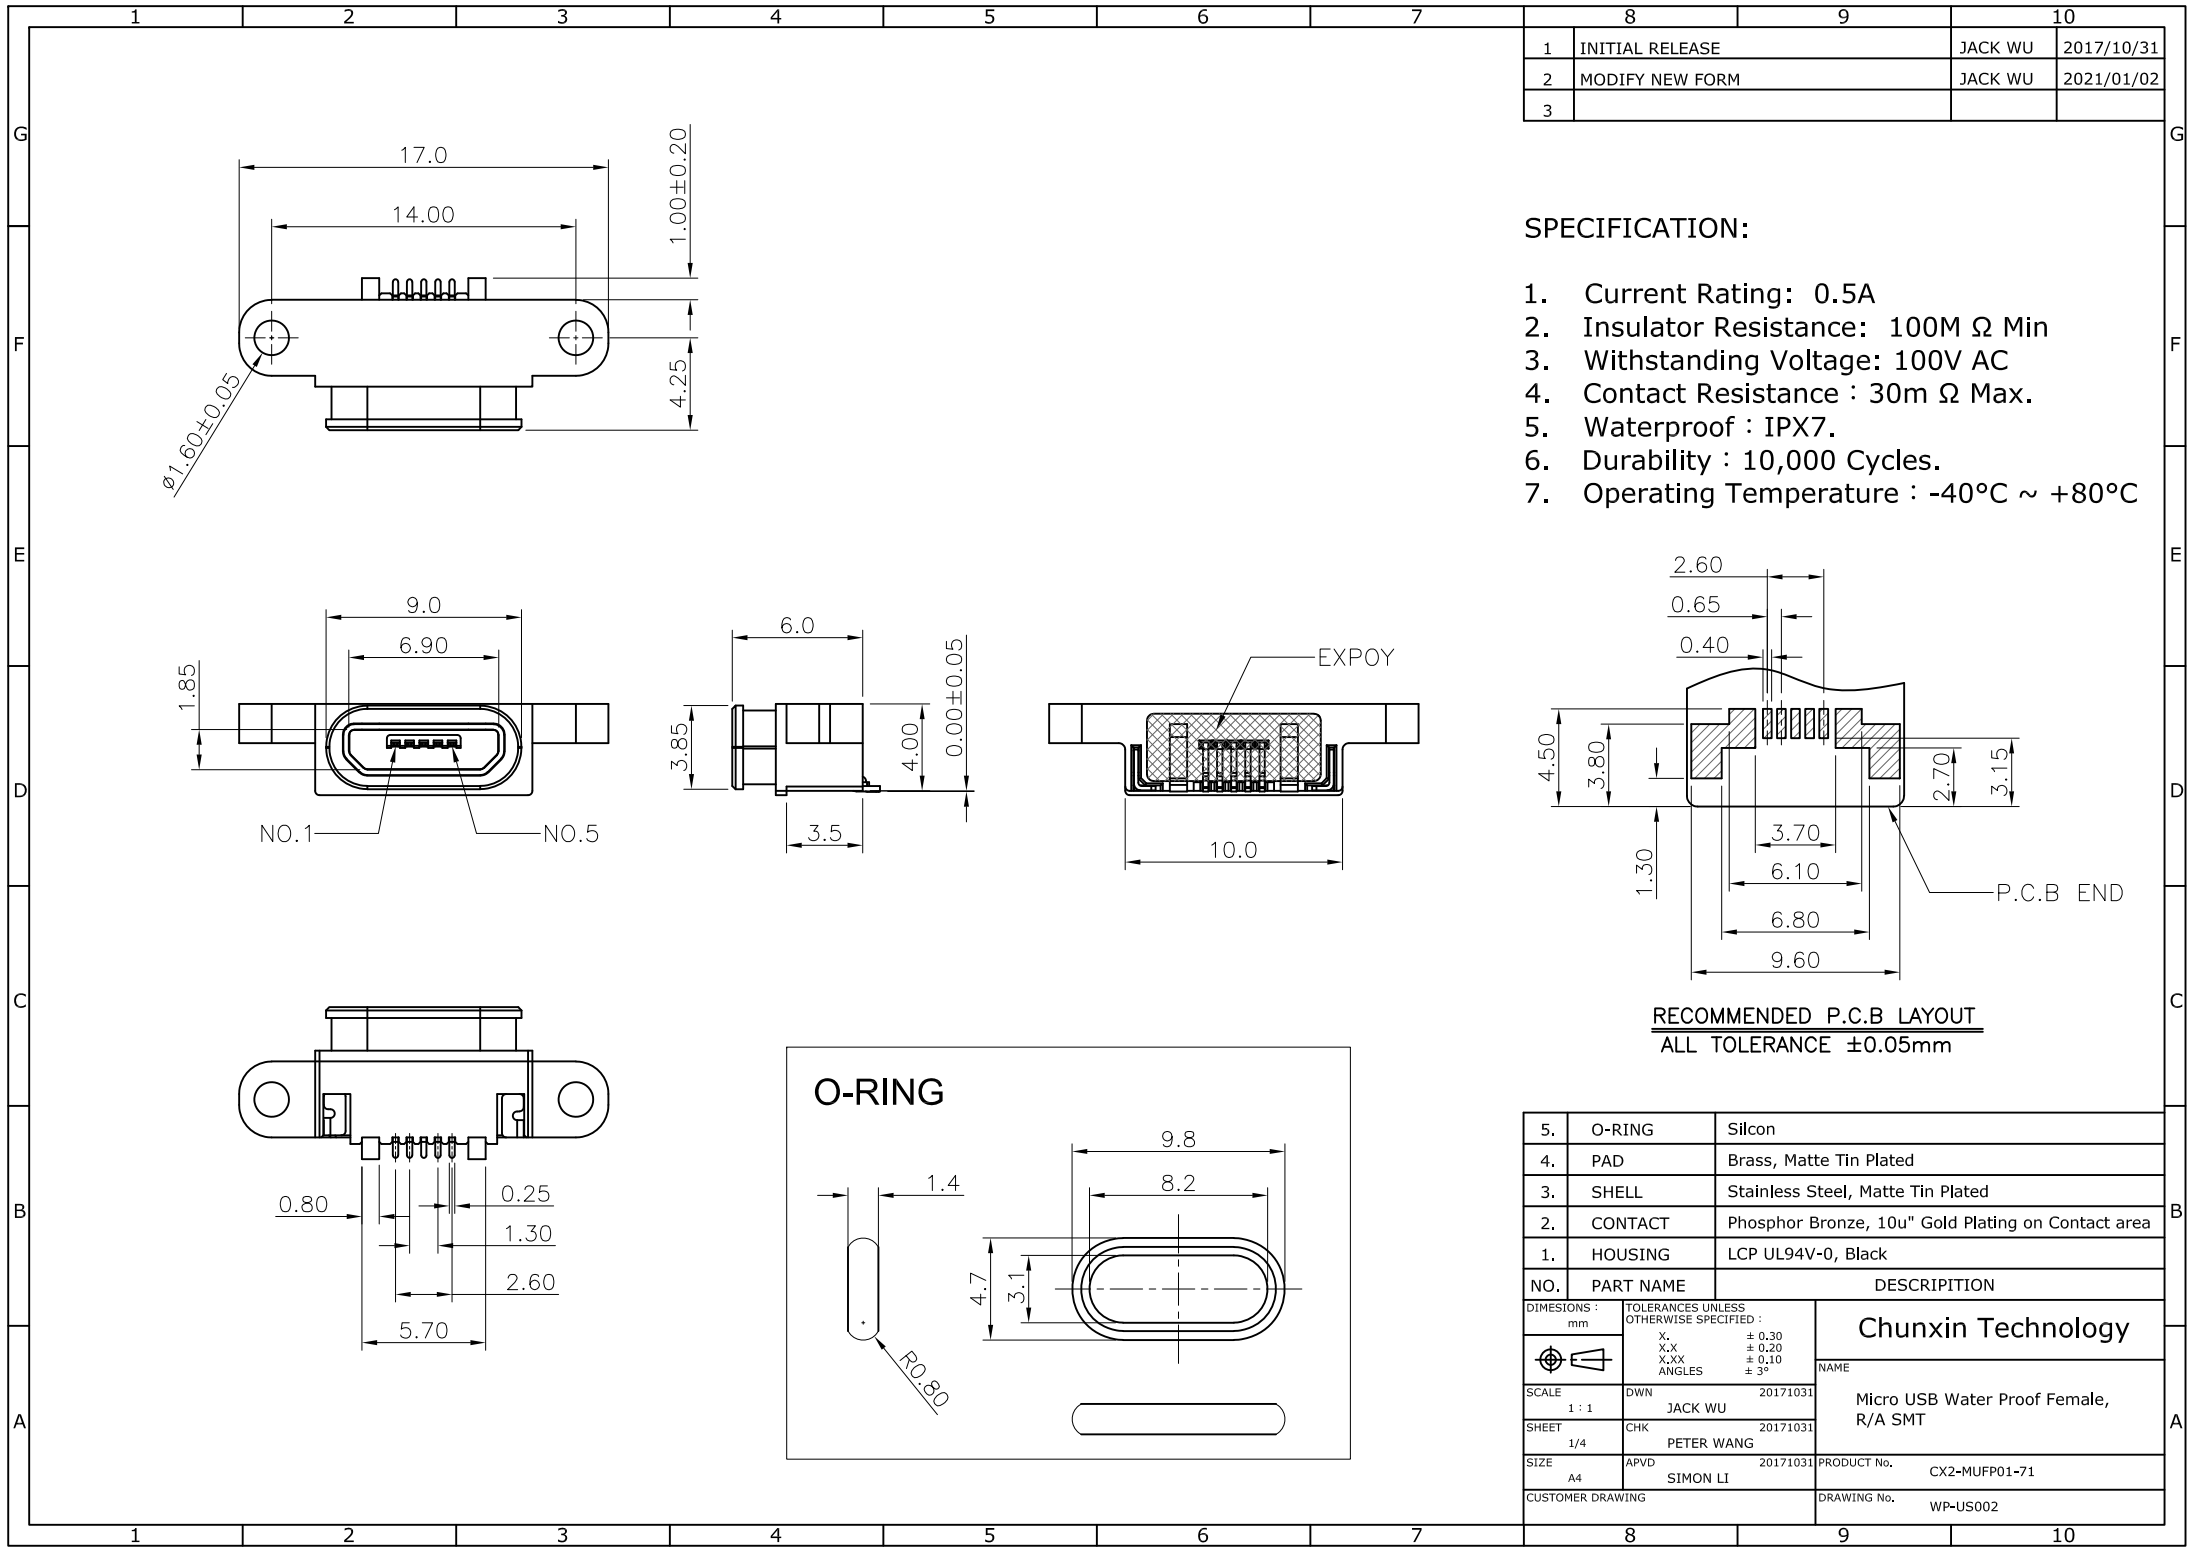


SPECIFICATION:

1. Current Rating: 0.5A
2. Insulator Resistance: 100M Ω Min
3. Withstanding Voltage: 100V AC
4. Contact Resistance : 30m Ω Max.
5. Waterproof : IPX7.
6. Durability : 10,000 Cycles.
7. Operating Temperature : -40°C ~ +80°C


5.	O-RING	Silcon
4.	PAD	Brass, Matte Tin Plated
3.	SHELL	Stainless Steel, Matte Tin Plated
2.	CONTACT	Phosphor Bronze, 10u" Gold Plating on Contact area
1.	HOUSING	LCP UL94V-0, Black
NO.	PART NAME	DESCRIPTION
Chunxin Technology		
NAME		
Micro USB Water Proof Female, R/A SMT		
PRODUCT No. CX2-MUFP01-71		
DRAWING No. WP-US002		

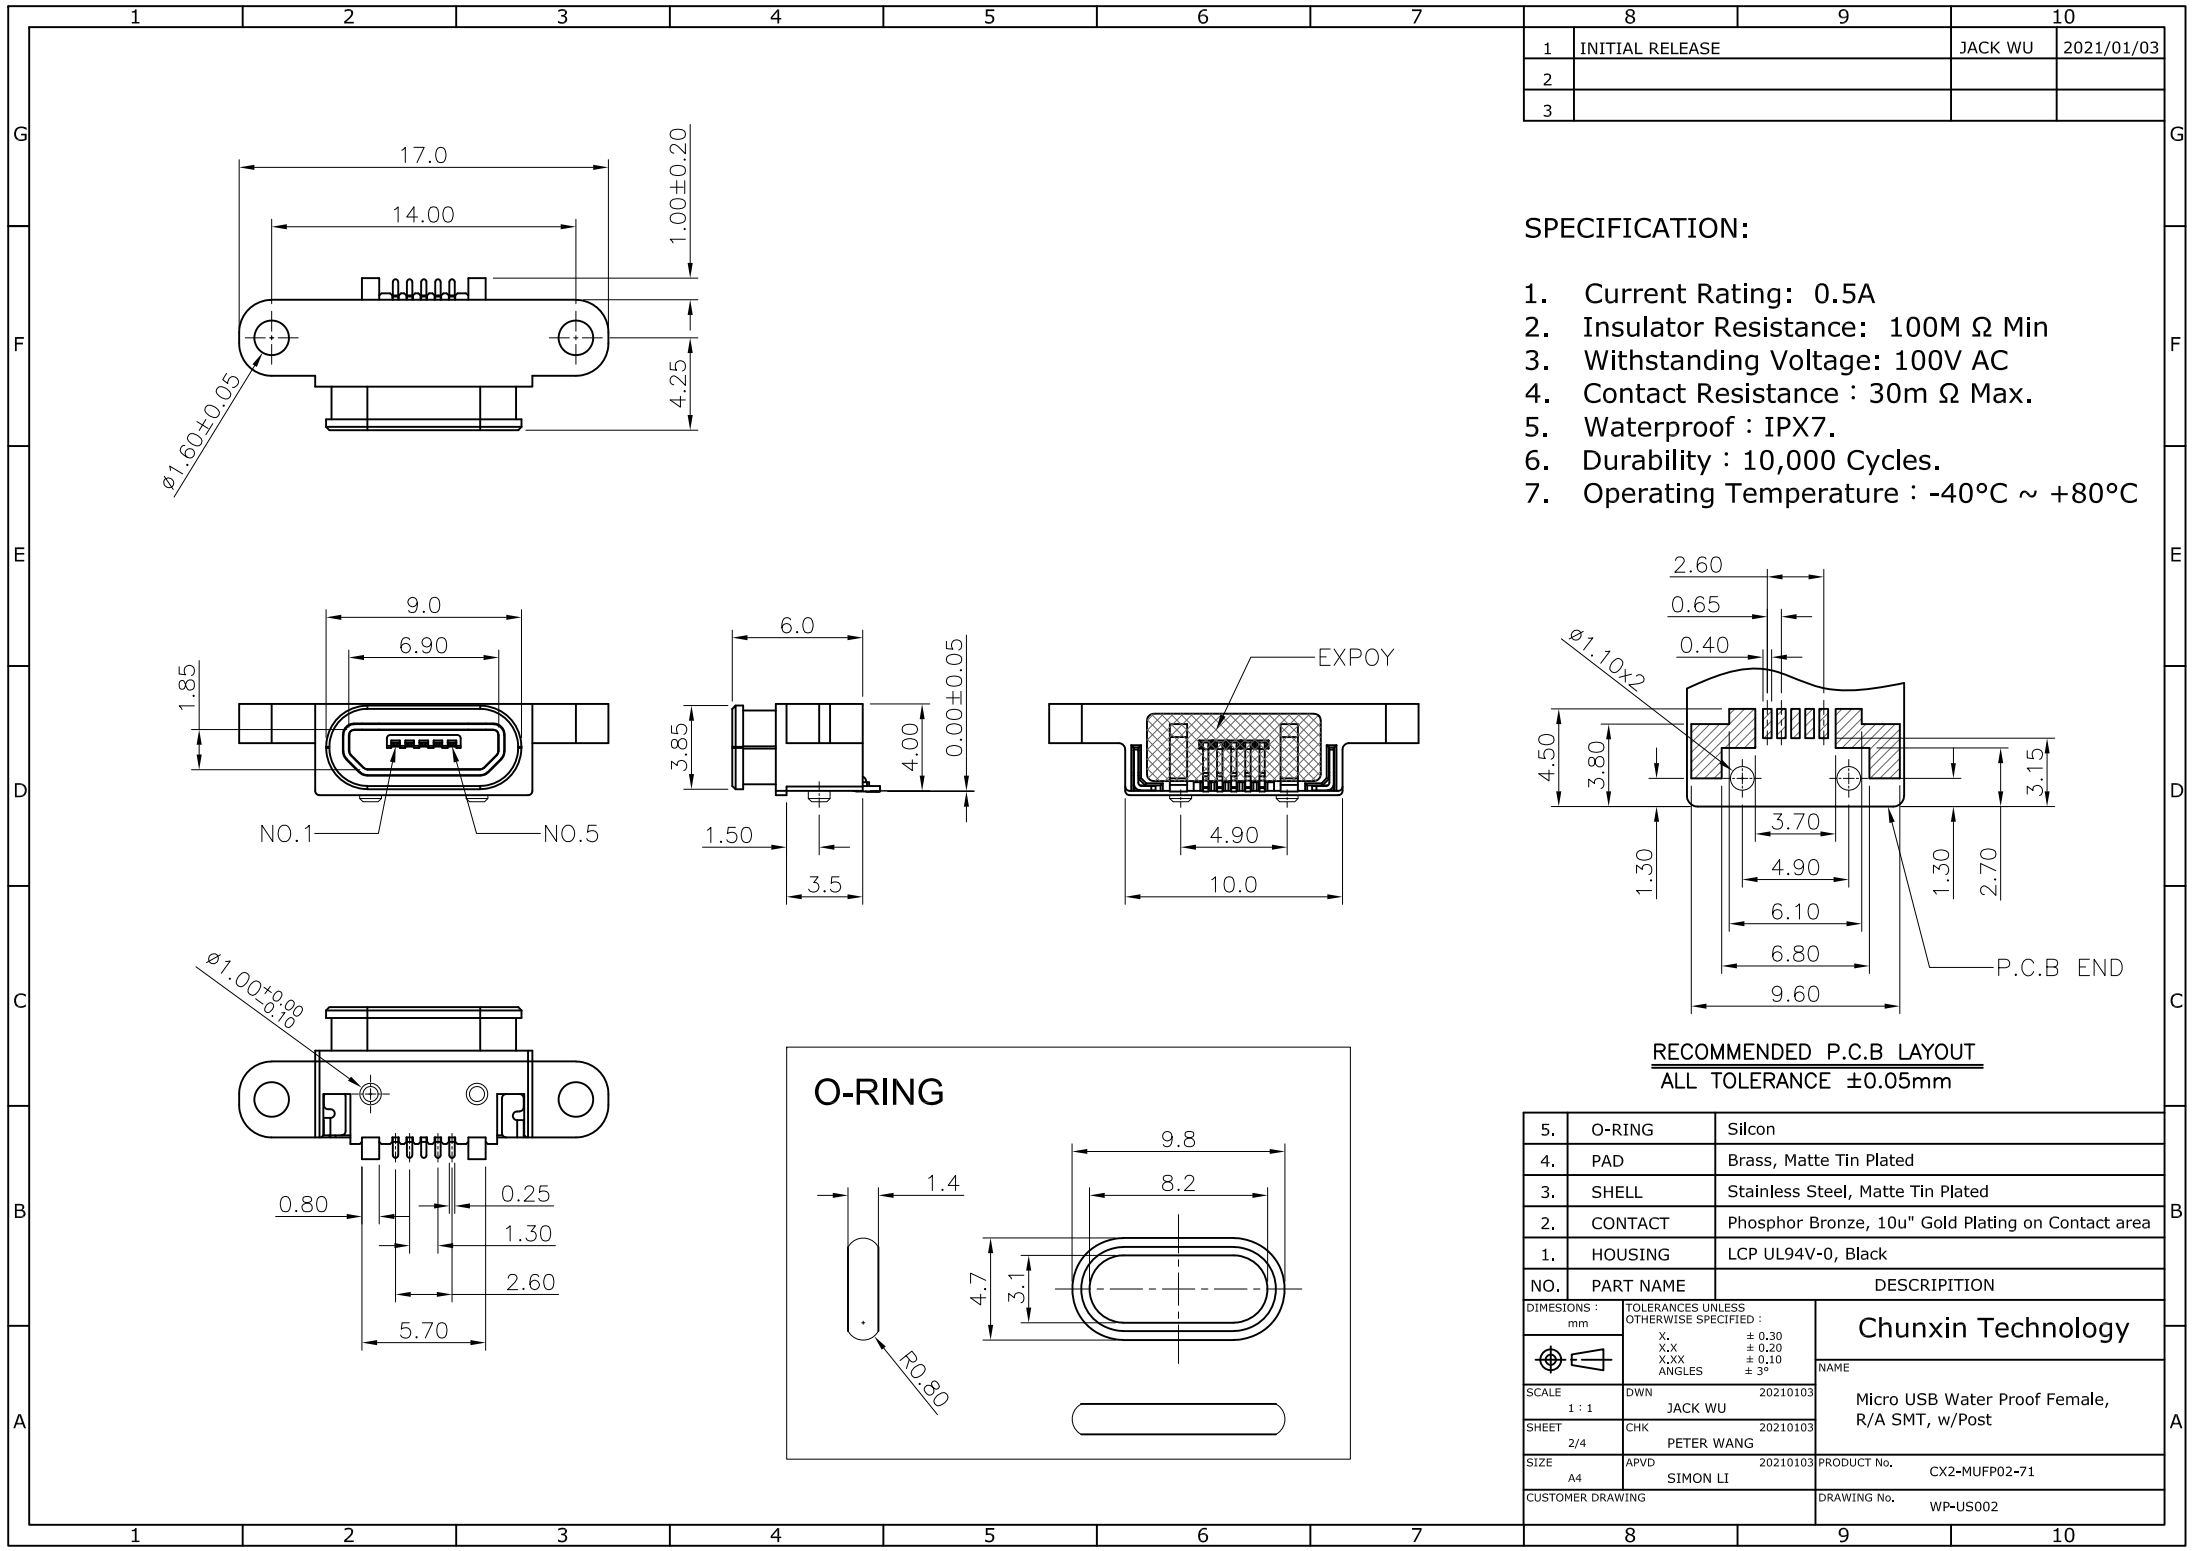



1. MOUNT CONDITION

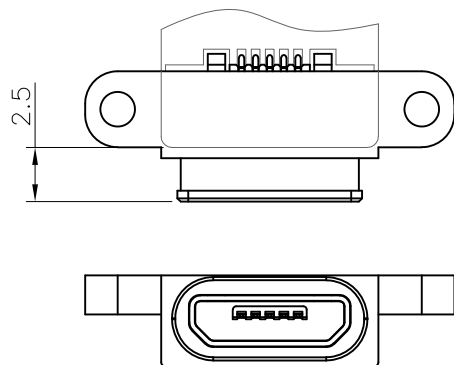


3. GASKET INTEGRATION CONDITION

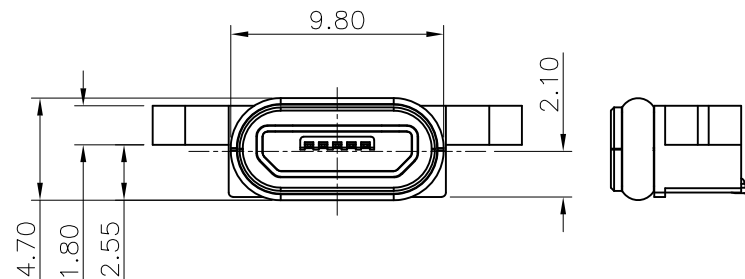

4. MECHANICAL SCHEMATIC



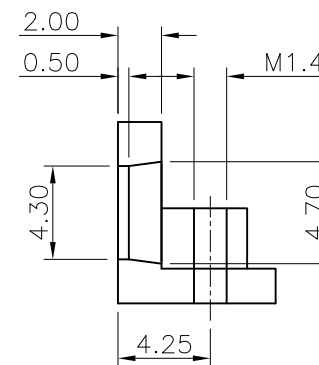
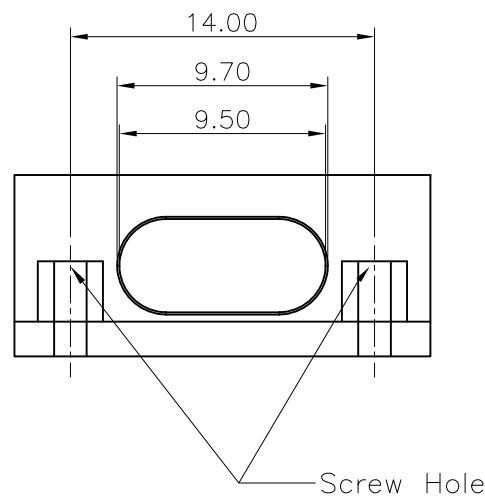


2. MATING CONDITION



DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :		Chunxin Technology	
		X. ± 0.30		NAME	
		X.X ± 0.20			
		X.XX ± 0.10			
		ANGLES ± 3°			
SCALE 1 : 1		DWN	JACK WU	20171031	Micro USB Water Proof Female, R/A SMT
SHEET 3/4		CHK	PETER WANG	20171031	
SIZE A4		APVD	SIMON LI	20171031	
CUSTOMER DRAWING					PRODUCT No. CX2-MUFP01-71/CX2-MUFP02-71
					DRAWING No. WP-US002

1	8	9	10
1	INITIAL RELEASE	JACK WU	2017/10/31
2	MODIFY NEW FORM	JACK WU	2021/01/02
3			

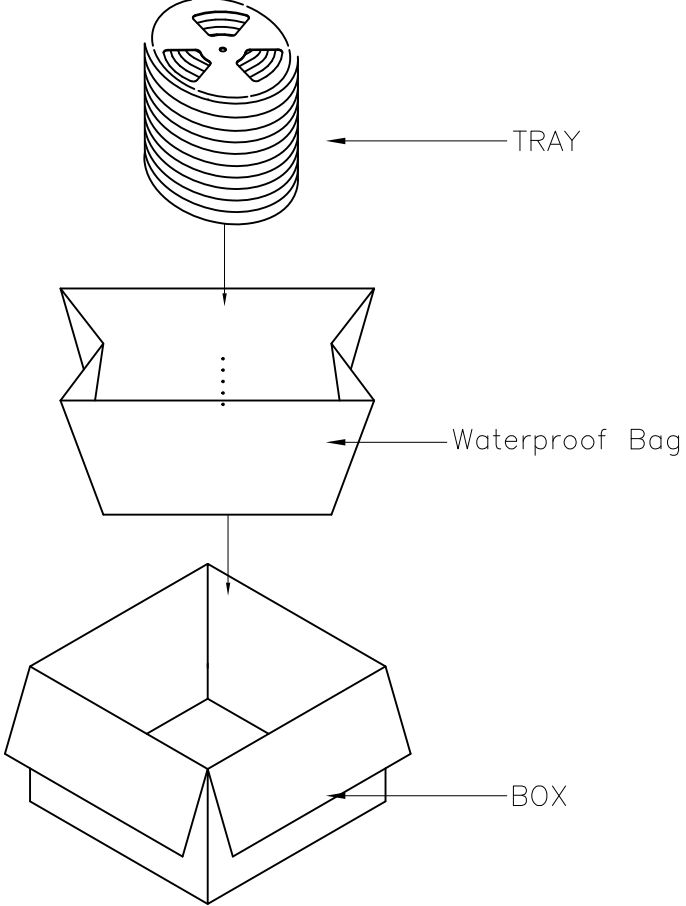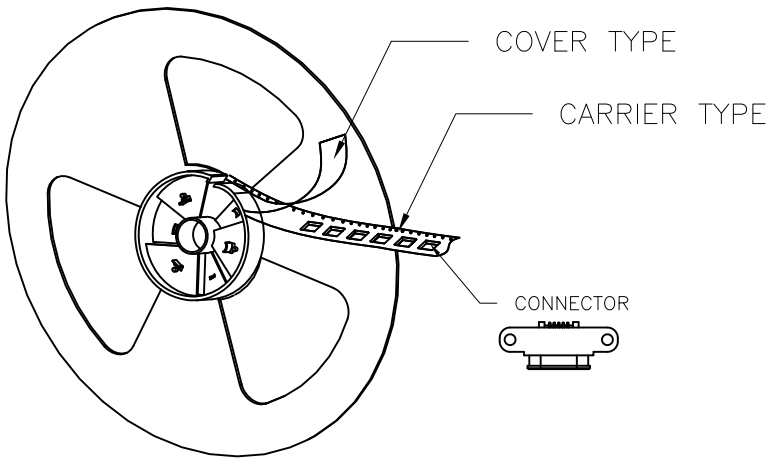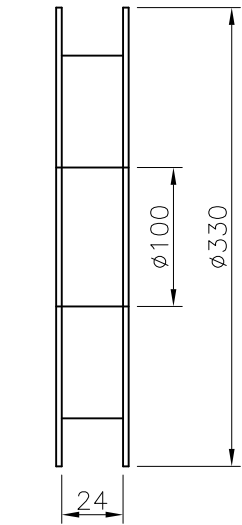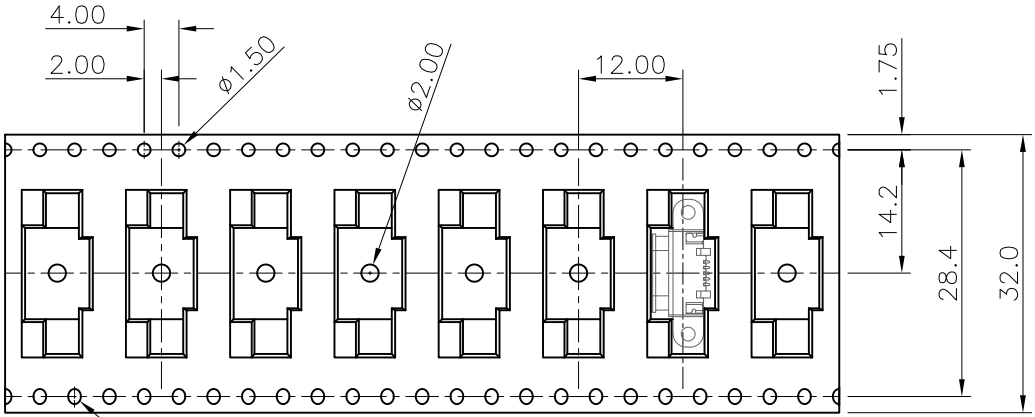

- NOTES:
- 1,100 PCS/Reel
 - 10 Reel/Box

DIMENSIONS : mm	TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°	Chunxin Technology
SCALE 1 : 1	DWN JACK WU	NAME Micro USB Water Proof Female, R/A SMT
SHEET 4/4	CHK PETER WANG	
SIZE A4	APVD SIMON LI	PRODUCT No. CX2-MUFP01-71/CX2-MUFP02-71
CUSTOMER DRAWING		DRAWING No. WP-US002